



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur
MICHAUDVILLE

Identité de la machine

5042

Composant

Transmission Manuelle

Fluide

NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 80 Tractor TDH Fluid. Please confirm the fluid type and grade, and specify the brand of the fluid on your next sample. Please specify the component make and model with your next sample.

USURE

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0073015	PC0060428	PC0048681
Date d'échant.		Client Info		06 Jul 2023	28 Sep 2022	07 Jul 2021
Âge d la Machine	hrs	Client Info		7180	6067	4704
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL
Fer	ppm	ASTM D5185(m)	>200	11	11	7
Chrome	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titane	ppm	ASTM D5185(m)		0	<1	0
Argent	ppm	ASTM D5185(m)	>7	2	0	<1
Aluminium	ppm	ASTM D5185(m)	>25	1	2	<1
Plomb	ppm	ASTM D5185(m)	>45	0	<1	<1
Cuivre	ppm	ASTM D5185(m)	>225	<1	0	<1
Étain	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE
Silicium	ppm	ASTM D5185(m)	>125	3	4	2
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1
Limon	scalar	Visual*	NONE	NONE	LIGHT	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		2	3	1
Bore	ppm	ASTM D5185(m)		18	26	19
Baryum	ppm	ASTM D5185(m)		0	0	0
Molybdène	ppm	ASTM D5185(m)		6	<1	1
Manganèse	ppm	ASTM D5185(m)		<1	<1	<1
Magnésium	ppm	ASTM D5185(m)		94	20	27
Calcium	ppm	ASTM D5185(m)		2602	2598	1738
Phosphore	ppm	ASTM D5185(m)		1006	972	766
Zinc	ppm	ASTM D5185(m)		1113	1078	875
Soufre	ppm	ASTM D5185(m)		3743	3738	2965
Visc 40°C	cSt	ASTM D7279(m)		63.5	79.2	59.8
Visc 100°C	cSt	ASTM D7279(m)		10.3	11.4	9.4
Indice de viscosité (VI)	Scale	ASTM D2270*		149	134	138

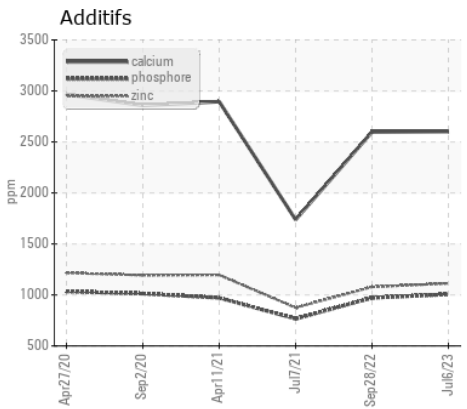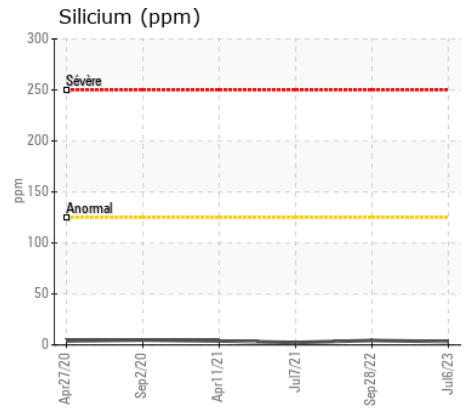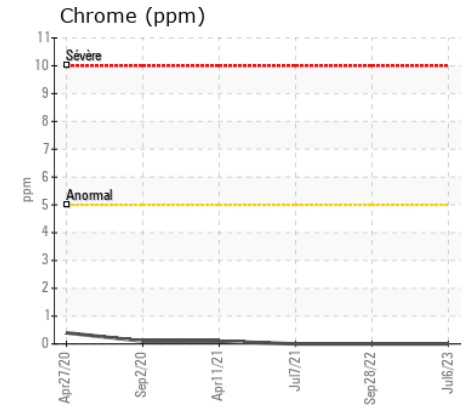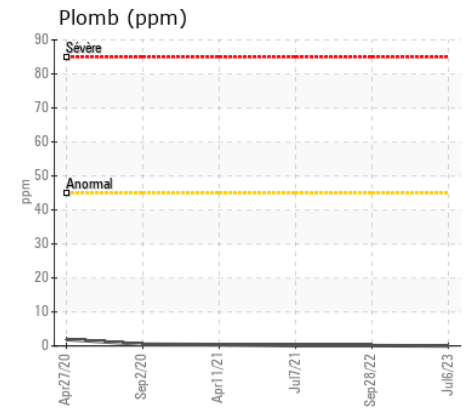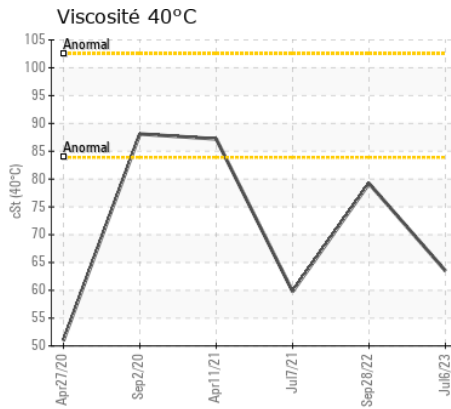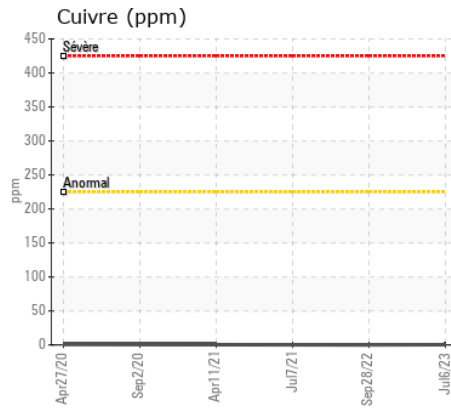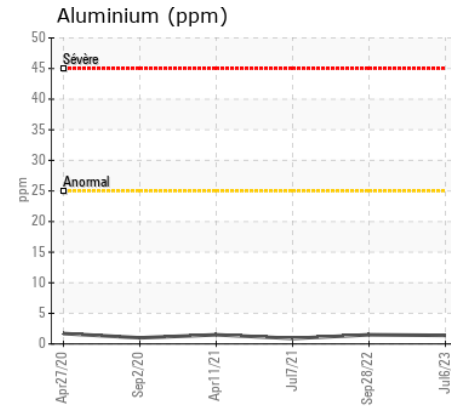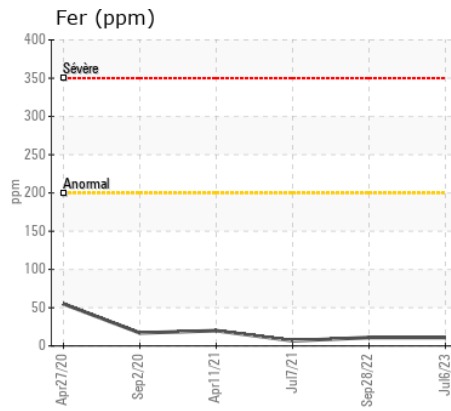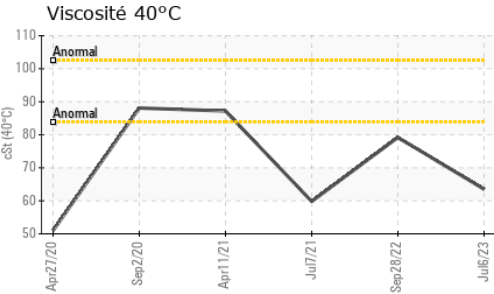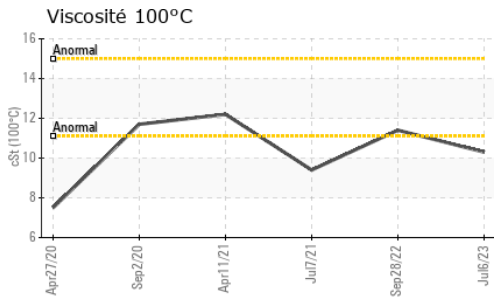

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUDVILLE INC.
N° d'échantillon : PC0073015 **Reçu** : 07 Jul 2023
N° de laboratoire : 02568578 **Diagnostiqué** : 10 Jul 2023
Numéro unique : 5605624 **Diagnostiqueur** : Kevin Marson
Analyse : MOB 1 (Additional Tests: KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com
 T:
 F: