



| | |
|----------------|---------------|
| USURE | NORMAL |
| CONTAMINATION | NORMAL |
| ÉTAT DU FLUIDE | NORMAL |

Identité de la machine

1215

Composant

Transmission (Auto)

Fluide

DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|---------------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Numéro d'échant. | | Client Info | | PC0072206 | PC0070909 | PC0066482 |
| Date d'échant. | | Client Info | | 06 Jul 2023 | 01 Mar 2023 | 03 Nov 2022 |
| Âge d la Machine | kms | Client Info | | 7123 | 6649 | 6137 |
| Âge de l'huile | kms | Client Info | | 0 | 0 | 0 |
| Âge du filtre | kms | Client Info | | 0 | 0 | 0 |
| Huile changée | | Client Info | | N/A | N/A | N/A |
| Filtre changé | | Client Info | | N/A | N/A | N/A |
| Statut de l'échant. | | | | NORMAL | NORMAL | NORMAL |

USURE

All component wear rates are normal.

| | | | | | | |
|-------------|--------|---------------|------|--------------|------|------|
| Fer | ppm | ASTM D5185(m) | >160 | 81 | 72 | 70 |
| Chrome | ppm | ASTM D5185(m) | >5 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >5 | <1 | <1 | <1 |
| Titane | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Argent | ppm | ASTM D5185(m) | >5 | 0 | 0 | 0 |
| Aluminium | ppm | ASTM D5185(m) | >50 | 20 | 19 | 17 |
| Plomb | ppm | ASTM D5185(m) | >50 | 26 | 27 | 27 |
| Cuivre | ppm | ASTM D5185(m) | >225 | 15 | 13 | 12 |
| Étain | ppm | ASTM D5185(m) | >10 | 4 | 4 | 3 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Métal blanc | scalar | Visual* | NONE | NONE | NONE | NONE |
| Bronze | scalar | Visual* | NONE | NONE | NONE | NONE |

CONTAMINATION












There is no indication of any contamination in the fluid.

| | | | | | | |
|----------------|--------|---------------|-------|--------------|-------|-------|
| Silicium | ppm | ASTM D5185(m) | >20 | 7 | 7 | 7 |
| Potassium | ppm | ASTM D5185(m) | >20 | 2 | 1 | 2 |
| Eau | % | ASTM D6304* | >0.1 | 0.027 | --- | --- |
| ppm d'eau | ppm | ASTM D6304* | >1000 | 277.0 | --- | --- |
| Limon | scalar | Visual* | NONE | NONE | NONE | NONE |
| Débris | scalar | Visual* | NONE | NONE | NONE | NONE |
| Saleté | scalar | Visual* | NONE | NONE | NONE | NONE |
| Apparence | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odeur | scalar | Visual* | NORML | NORML | NORML | NORML |
| Eau émulsifiée | scalar | Visual* | >0.1 | .2% | NEG | NEG |

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

| | | | | | | |
|--------------------------|-------|---------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185(m) | | 5 | 5 | 4 |
| Bore | ppm | ASTM D5185(m) | | 68 | 69 | 74 |
| Baryum | ppm | ASTM D5185(m) | | <1 | 0 | 0 |
| Molybdène | ppm | ASTM D5185(m) | | <1 | <1 | <1 |
| Manganèse | ppm | ASTM D5185(m) | | 1 | 1 | 1 |
| Magnésium | ppm | ASTM D5185(m) | | 2 | <1 | <1 |
| Calcium | ppm | ASTM D5185(m) | | 102 | 104 | 102 |
| Phosphore | ppm | ASTM D5185(m) | | 229 | 246 | 242 |
| Zinc | ppm | ASTM D5185(m) | | 23 | 21 | 20 |
| Soufre | ppm | ASTM D5185(m) | | 1018 | 1101 | 1112 |
| Visc 40°C | cSt | ASTM D7279(m) | 26.0 | 32.5 | 32.5 | 32.7 |
| Visc 100°C | cSt | ASTM D7279(m) | 5.5 | 6.4 | 6.4 | 6.5 |
| Indice de viscosité (VI) | Scale | ASTM D2270* | 155 | 153 | 153 | 157 |

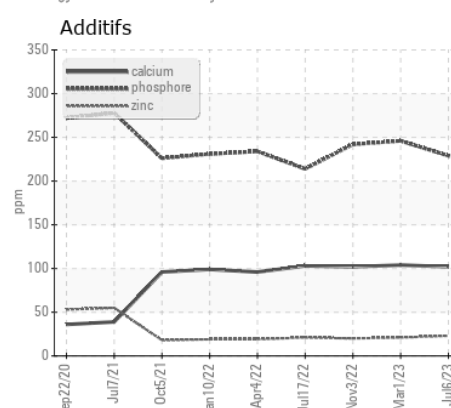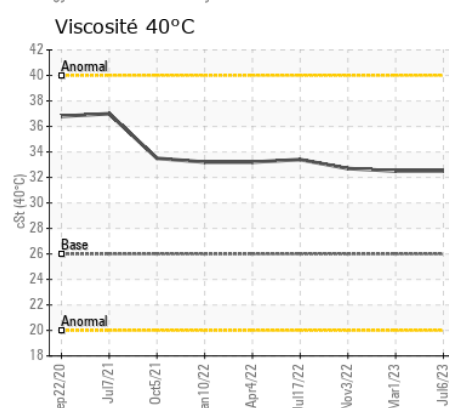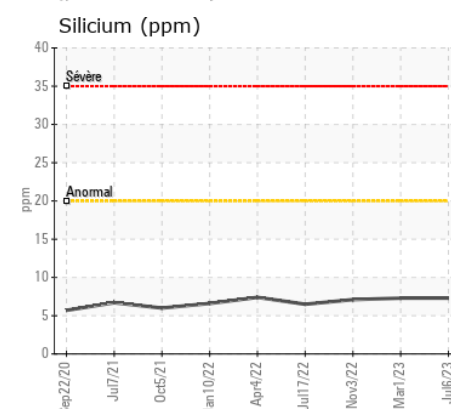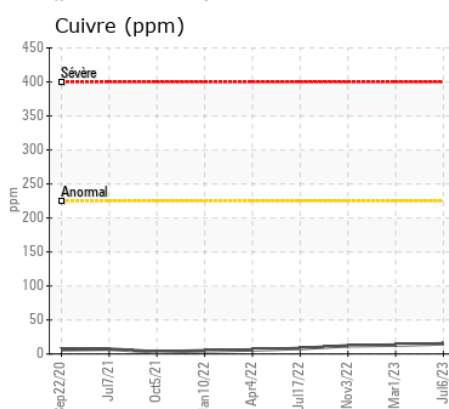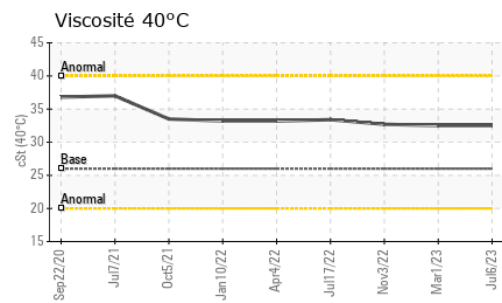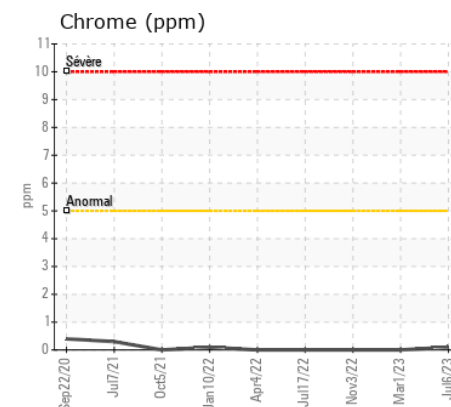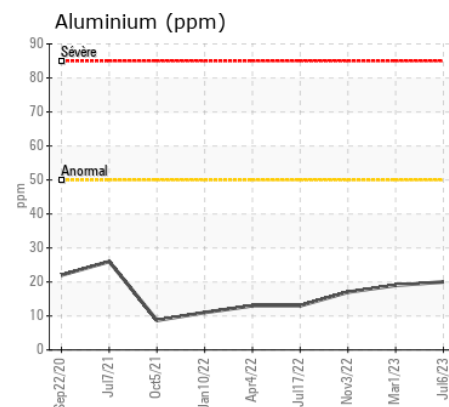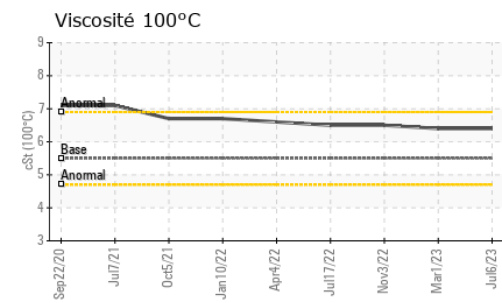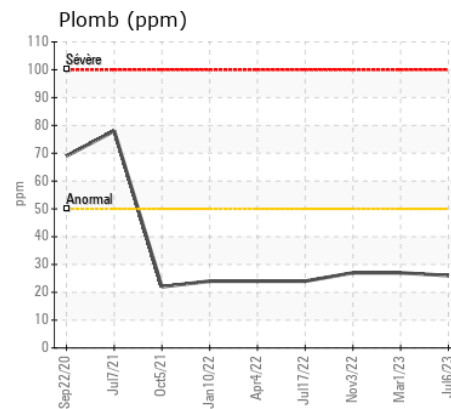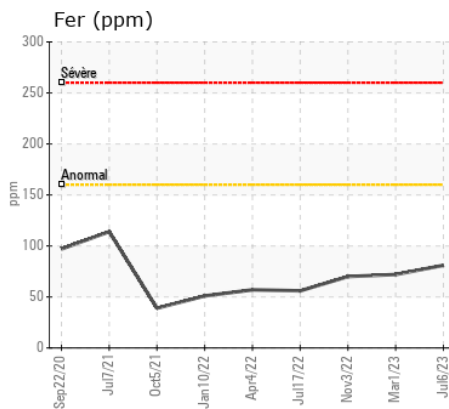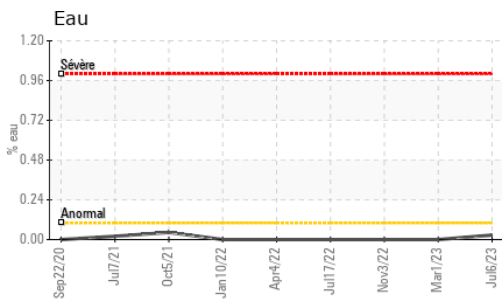

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUDVILLE INC.
N° d'échantillon : PC0072206 **Reçu** : 07 Jul 2023
N° de laboratoire : 02568579 **Diagnostiqué** : 10 Jul 2023
Numéro unique : 5605625 **Diagnostiqueur** : Wes Davis
Analyse : MOB 1 (Additional Tests: KF, KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com
 T:
 F: