



Identité de la machine

**4505**

Composant

**Liquide de refroidissement**

Fluide

**EXTENDED LIFE COOLANT (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) EXTENDED LIFE COOLANT. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0073018</b>	---	---
Date d'échant.		Client Info		<b>06 Jul 2023</b>	---	---
Âge d la Machine	hrs	Client Info		<b>8244</b>	---	---
Âge de l'huile	hrs	Client Info		<b>0</b>	---	---
Huile changée		Client Info		<b>N/A</b>	---	---
Statut de l'échant.				<b>NORMAL</b>	---	---

**CORROSION**

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>15	<b>4</b>	---	---
Aluminium	ppm	ASTM D5185(m)	>10	<b>3</b>	---	---
Cuivre	ppm	ASTM D5185(m)	>10	<b>2</b>	---	---
Plomb	ppm	ASTM D5185(m)	>10	<b>4</b>	---	---
Étain	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Argent	ppm	ASTM D5185(m)	>10	<b>1</b>	---	---
Zinc	ppm	ASTM D5185(m)	>10	<b>4</b>	---	---

**CONTAMINANTS**








There is no indication of any contamination in the coolant.

Calcium	ppm	ASTM D5185(m)	>100	<b>10</b>	---	---
Magnésium	ppm	ASTM D5185(m)	>40	<b>3</b>	---	---
Apparence	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odeur	scalar	Visual*	NORML	<b>NORML</b>	---	---
Apparence du liquide de refroidissement		Visual*	Clear	<b>Clear</b>	---	---

**ÉTAT DU LIQUIDE REFROIDISSEMENT**

The condition of the coolant is acceptable for the time in service.

Densité		ASTM D1298*		<b>1.068</b>	---	---
pH	Scale 0-14	ASTM D1287*	9.0	<b>7.84</b>	---	---
Nitrites	ppm	Alcan Test Kit*		<b>600</b>	---	---
Réserve d'alcalinité	Scale 0-20	ASTM D1121*		<b>7.2</b>	---	---
Pourcentage de glycol	%	ASTM D3321*	50	<b>50.5</b>	---	---
Point de congélation	°C	ASTM D3321*	-40	<b>-35</b>	---	---
Carboxylate				<b>---</b>	---	---
Silicium	ppm	ASTM D5185(m)		<b>50</b>	---	---
Phosphore	ppm	ASTM D5185(m)		<b>31</b>	---	---
Bore	ppm	ASTM D5185(m)		<b>280</b>	---	---
Molybdène	ppm	ASTM D5185(m)		<b>500</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>3733</b>	---	---
Potassium	ppm	ASTM D5185(m)		<b>98</b>	---	---
Couleur du liquide de refroidissement		Visual*	Orange/R	<b>Red</b>	---	---

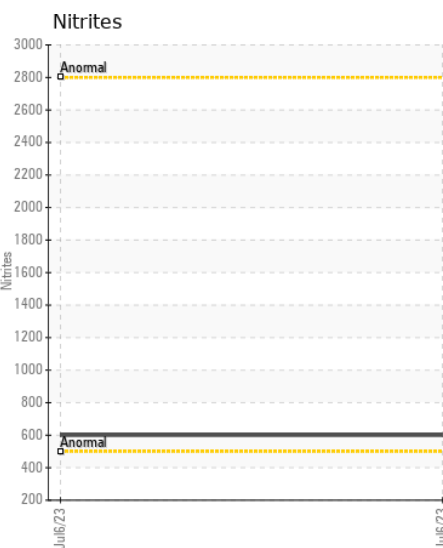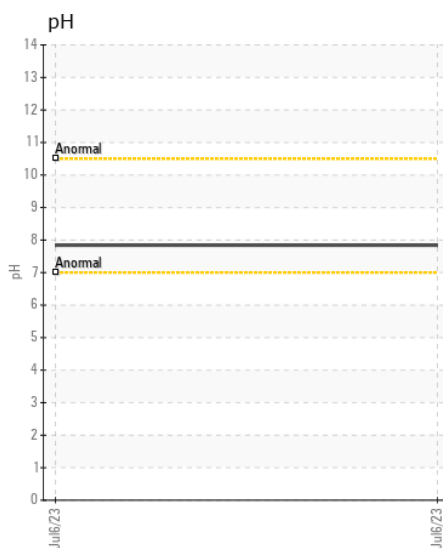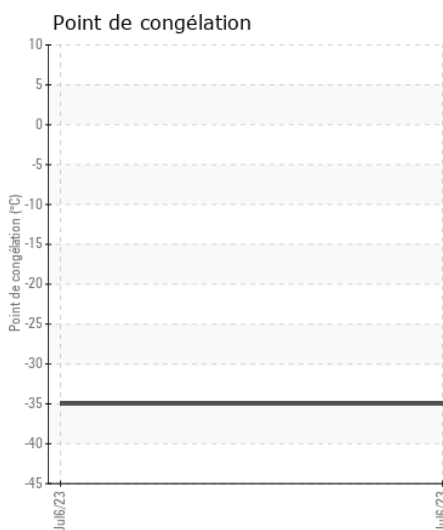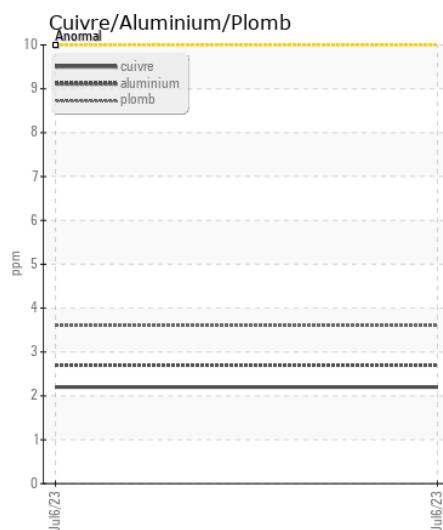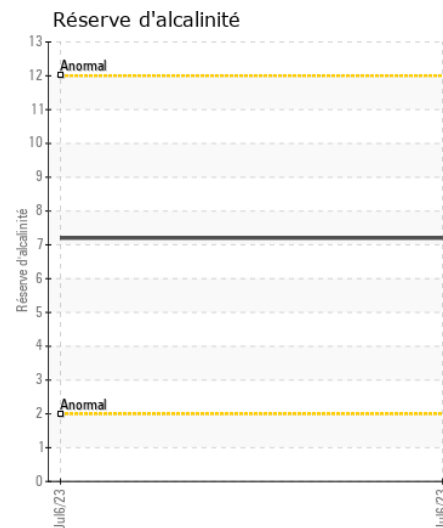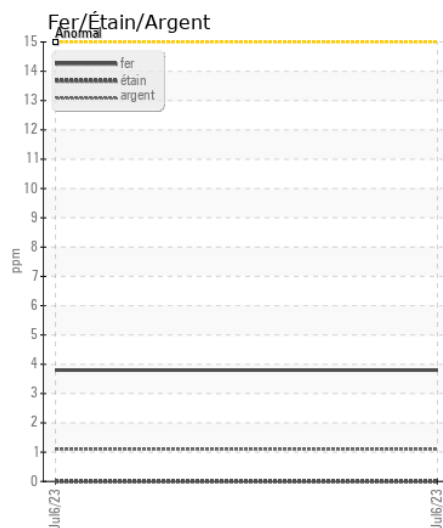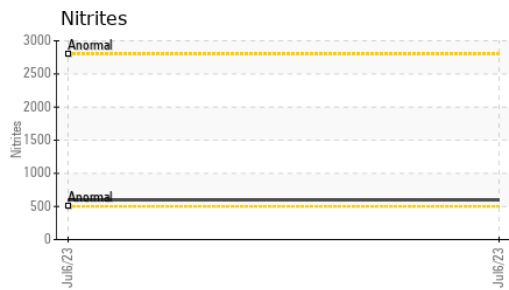

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUDVILLE INC.  
**N° d'échantillon** : PC0073018 **Reçu** : 07 Jul 2023  
**N° de laboratoire** : 02568635 **Diagnostiqué** : 07 Jul 2023  
**Numéro unique** : 5605681 **Diagnostiqueur** : Wes Davis  
**Analyse** : COOL

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

270 RUE BRUNET  
 MONT ST-HILAIRE, QC  
 CA J3H 0M6  
 Contact: Martin Trudel  
 mtrudel@michaudville.com

T:  
F: