



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur
MICHAUDVILLE

Identité de la machine

5037

Composant

Différentiel

Fluide

NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 75W80 Tractor TDH Fluid. Please confirm the oil type and grade, and specify the brand of the oil on your next sample. Please specify the component make and model with your next sample.

USURE

All component wear rates are normal.












CONTAMINATION

The water content is negligible. There is no indication of any contamination in the oil.

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0071002	---	---
Date d'échant.		Client Info		16 Jul 2023	---	---
Âge d la Machine	hrs	Client Info		10915	---	---
Âge de l'huile	hrs	Client Info		0	---	---
Âge du filtre	hrs	Client Info		0	---	---
Huile changée		Client Info		N/A	---	---
Filtre changé		Client Info		N/A	---	---
Statut de l'échant.				NORMAL	---	---
Fer	ppm	ASTM D5185(m)	>500	147	---	---
Chrome	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titane	ppm	ASTM D5185(m)		0	---	---
Argent	ppm	ASTM D5185(m)		0	---	---
Aluminium	ppm	ASTM D5185(m)	>25	1	---	---
Plomb	ppm	ASTM D5185(m)	>25	0	---	---
Cuivre	ppm	ASTM D5185(m)	>100	<1	---	---
Étain	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Métal blanc	scalar	Visual*	NONE	VLITE	---	---
Bronze	scalar	Visual*	NONE	NONE	---	---
Silicium	ppm	ASTM D5185(m)	>75	10	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Eau	%	ASTM D6304*	>.2	0.091	---	---
ppm d'eau	ppm	ASTM D6304*	>2000	918.4	---	---
Limon	scalar	Visual*	NONE	NONE	---	---
Débris	scalar	Visual*	NONE	NONE	---	---
Saleté	scalar	Visual*	NONE	NONE	---	---
Apparence	scalar	Visual*	NORML	NORML	---	---
Odeur	scalar	Visual*	NORML	NORML	---	---
Eau émulsifiée	scalar	Visual*	>.2	.2%	---	---
Sodium	ppm	ASTM D5185(m)		7	---	---
Bore	ppm	ASTM D5185(m)		93	---	---
Baryum	ppm	ASTM D5185(m)		0	---	---
Molybdène	ppm	ASTM D5185(m)		7	---	---
Manganèse	ppm	ASTM D5185(m)		1	---	---
Magnésium	ppm	ASTM D5185(m)		117	---	---
Calcium	ppm	ASTM D5185(m)		3144	---	---
Phosphore	ppm	ASTM D5185(m)		1168	---	---
Zinc	ppm	ASTM D5185(m)		1311	---	---
Soufre	ppm	ASTM D5185(m)		4052	---	---
Visc 40°C	cSt	ASTM D7279(m)		54.4	---	---
Visc 100°C	cSt	ASTM D7279(m)		8.4	---	---
Indice de viscosité (VI)	Scale	ASTM D2270*		127	---	---

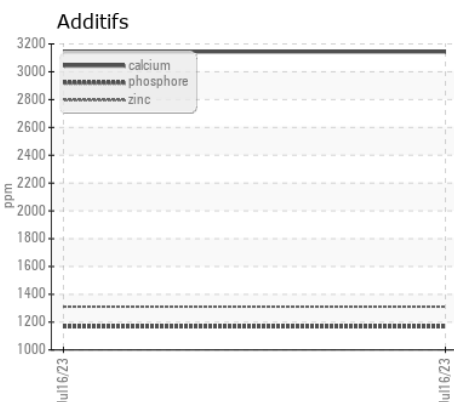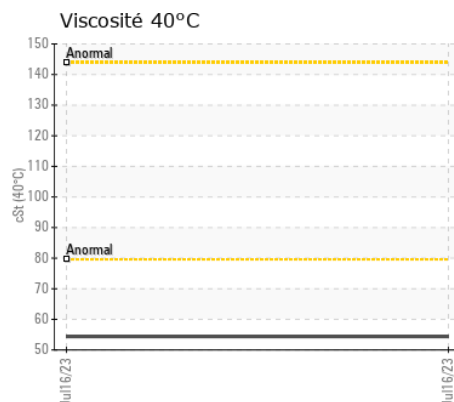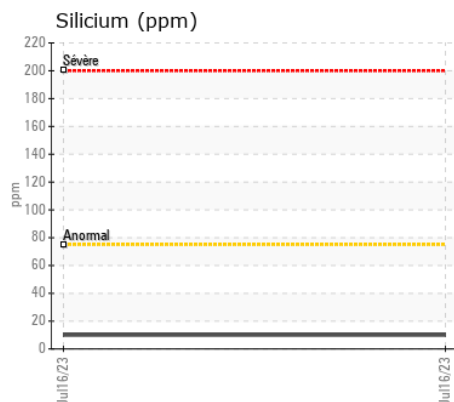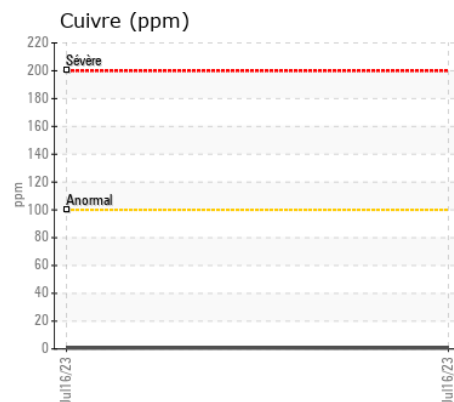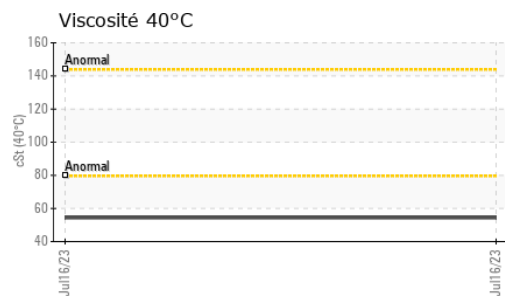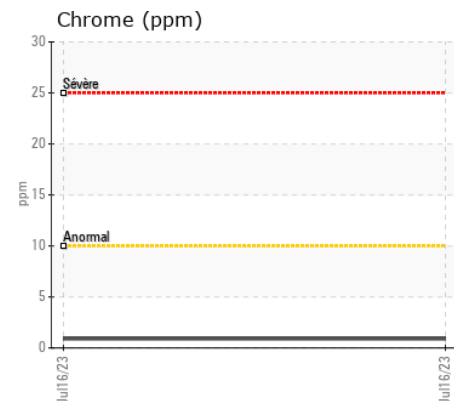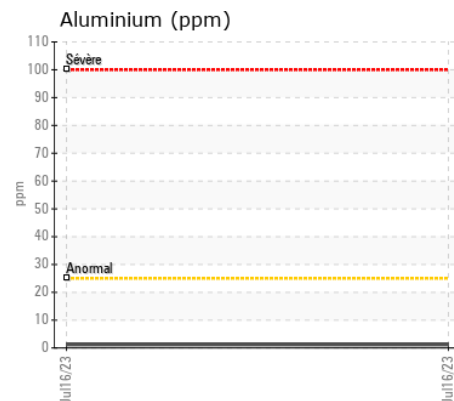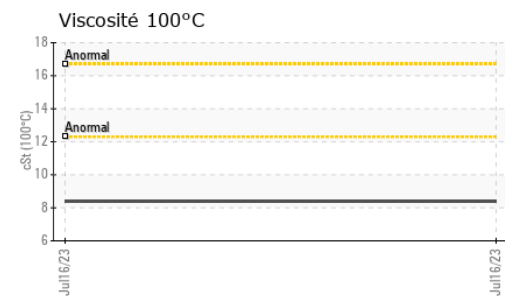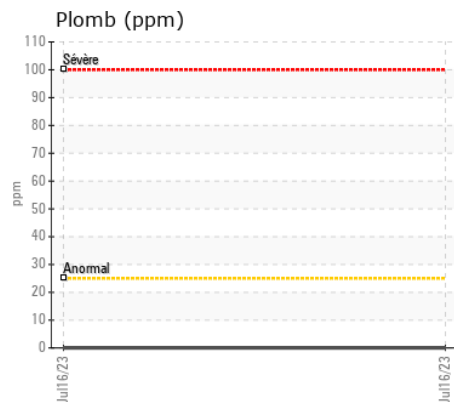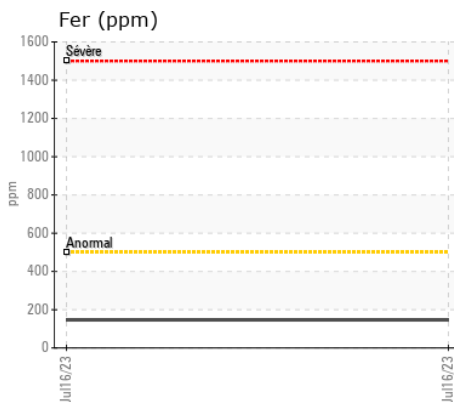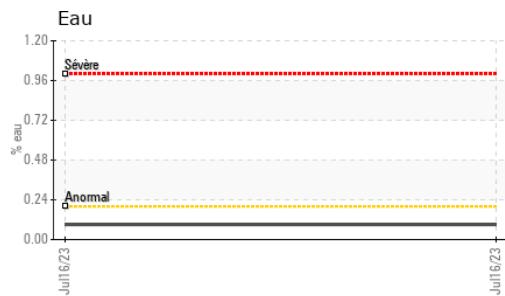

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUDVILLE INC.
N° d'échantillon : PC0071002 **Reçu** : 17 Jul 2023
N° de laboratoire : 02570459 **Diagnostiqué** : 18 Jul 2023
Numéro unique : 5607505 **Diagnostiqueur** : Wes Davis
Analyse : MOB 1 (Additional Tests: KF, KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

T:
F: