



USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Secteur  
**MICHAUDVILLE**

Identité de la machine

**1222**

Composant

**Transmission (Auto)**

Fluide

**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.  
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0071935</b>	PC0070993	PC0066524
Date d'échant.		Client Info		<b>24 Jul 2023</b>	14 Mar 2023	17 Nov 2022
Âge d la Machine	hrs	Client Info		<b>9198</b>	8769	8345
Âge de l'huile	hrs	Client Info		<b>0</b>	0	0
Âge du filtre	hrs	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>NORMAL</b>	ABNORMAL	NORMAL

**USURE**

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	<b>35</b>	35	25
Chrome	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminium	ppm	ASTM D5185(m)	>50	<b>16</b>	15	12
Plomb	ppm	ASTM D5185(m)	>50	<b>5</b>	5	4
Cuivre	ppm	ASTM D5185(m)	>225	<b>12</b>	10	7
Étain	ppm	ASTM D5185(m)	>10	<b>2</b>	2	1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**












Test for glycol is negative. There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	<b>6</b>	7	6
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	3	<1
Glycol	%	ASTM D7922*		<b>0.0</b>	▲ 0.041	---
Limon	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Débris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Saleté	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>NEG</b>	.2%	.2%

**ÉTAT DU FLUIDE**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	5	3
Bore	ppm	ASTM D5185(m)		<b>70</b>	71	75
Baryum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdène	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganèse	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnésium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	<1
Calcium	ppm	ASTM D5185(m)		<b>110</b>	115	115
Phosphore	ppm	ASTM D5185(m)		<b>227</b>	234	234
Zinc	ppm	ASTM D5185(m)		<b>4</b>	4	3
Soufre	ppm	ASTM D5185(m)		<b>1345</b>	1375	1401
Visc 40°C	cSt	ASTM D7279(m)	26.0	<b>33.3</b>	33.1	33.8
Visc 100°C	cSt	ASTM D7279(m)	5.5	<b>6.5</b>	6.6	6.7
Indice de viscosité (VI)	Scale	ASTM D2270*	155	<b>152</b>	158	159

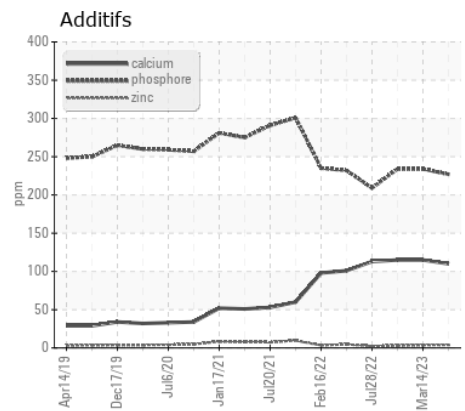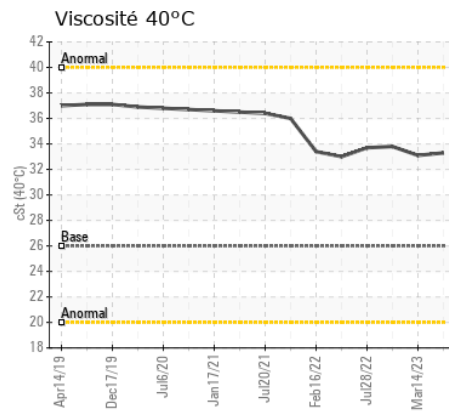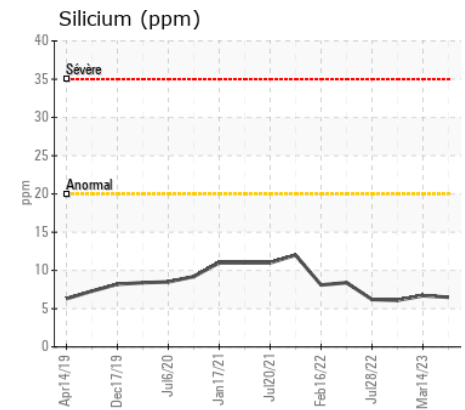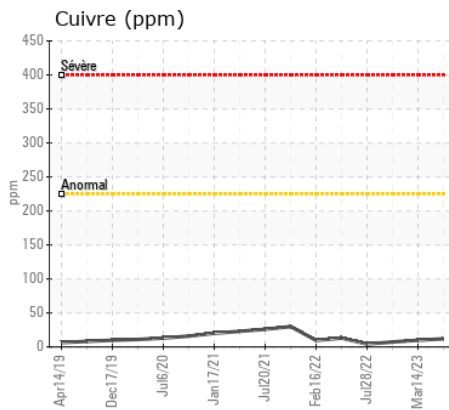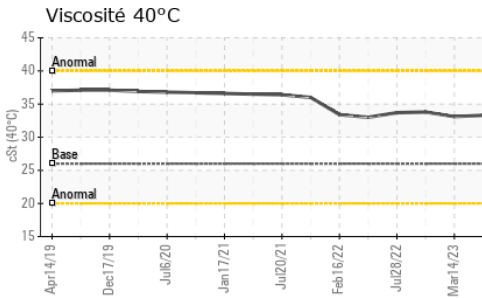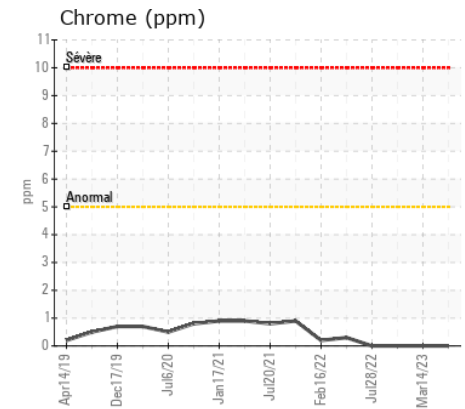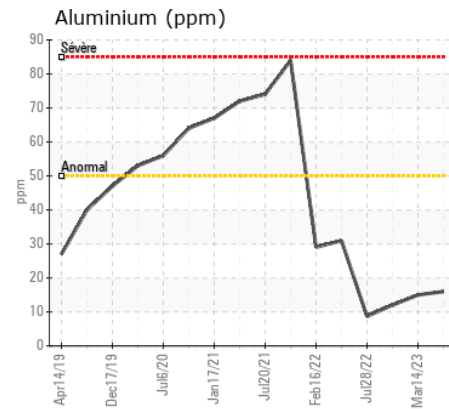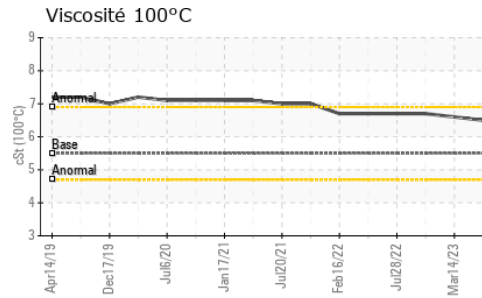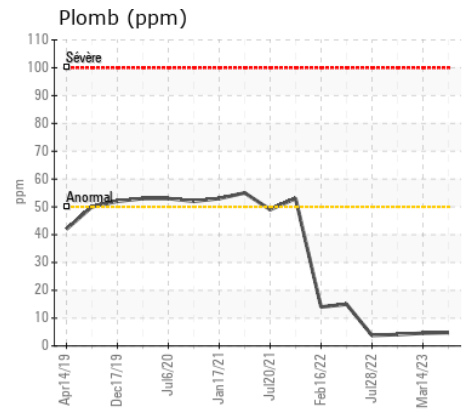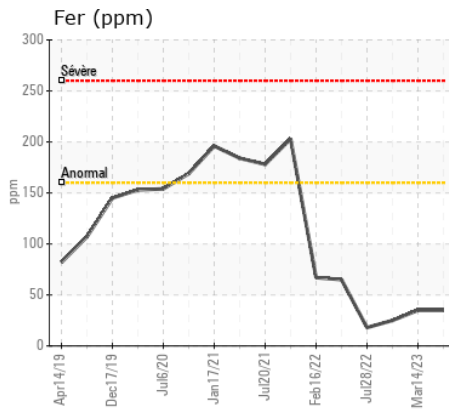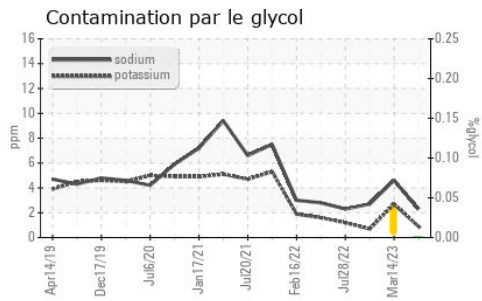

ISO 17025:2017  
Accredited  
Laboratory

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**  
**N° d'échantillon** : PC0071935 **Reçu** : 25 Jul 2023  
**N° de laboratoire** : 02571977 **Diagnostiqué** : 26 Jul 2023  
**Numéro unique** : 5617028 **Diagnostiqueur** : Wes Davis  
**Analyse** : MOB 1 ( Additional Tests: KV100, VI )

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET  
MONT ST-HILAIRE, QC  
CA J3H 0M6  
Contact: Martin Trudel  
mtrudel@michaudville.com

T:  
F: