



USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Identité de la machine

**1228**

Composant

**Transmission (Auto)**

Fluide

**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.  
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0078271</b>	PC0070828	PC0065836
Date d'échant.		Client Info		<b>25 Jul 2023</b>	16 Apr 2023	02 Nov 2022
Âge d la Machine	hrs	Client Info		<b>1350</b>	839	393
Âge de l'huile	hrs	Client Info		<b>0</b>	0	0
Âge du filtre	hrs	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>NORMAL</b>	NORMAL	NORMAL

**USURE**

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	<b>50</b>	39	31
Chrome	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminium	ppm	ASTM D5185(m)	>50	<b>12</b>	9	6
Plomb	ppm	ASTM D5185(m)	>50	<b>14</b>	6	1
Cuivre	ppm	ASTM D5185(m)	>225	<b>5</b>	4	3
Étain	ppm	ASTM D5185(m)	>10	<b>2</b>	2	1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**












The water content is negligible. There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	<b>5</b>	5	5
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	3	4
Eau	%	ASTM D6304*	>0.1	<b>0.047</b>	---	---
ppm d'eau	ppm	ASTM D6304*	>1000	<b>471.5</b>	---	---
Limon	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Débris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Saleté	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>.2%</b>	NEG	NEG

**ÉTAT DU FLUIDE**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>4</b>	4	4
Bore	ppm	ASTM D5185(m)		<b>92</b>	97	99
Baryum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Molybdène	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Manganèse	ppm	ASTM D5185(m)		<b>1</b>	1	1
Magnésium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Calcium	ppm	ASTM D5185(m)		<b>80</b>	84	71
Phosphore	ppm	ASTM D5185(m)		<b>274</b>	280	278
Zinc	ppm	ASTM D5185(m)		<b>42</b>	35	29
Soufre	ppm	ASTM D5185(m)		<b>1091</b>	1130	1064
Visc 40°C	cSt	ASTM D7279(m)	26.0	<b>34.1</b>	34.3	34.5
Visc 100°C	cSt	ASTM D7279(m)	5.5	<b>6.8</b>	6.9	6.9
Indice de viscosité (VI)	Scale	ASTM D2270*	155	<b>162</b>	166	164

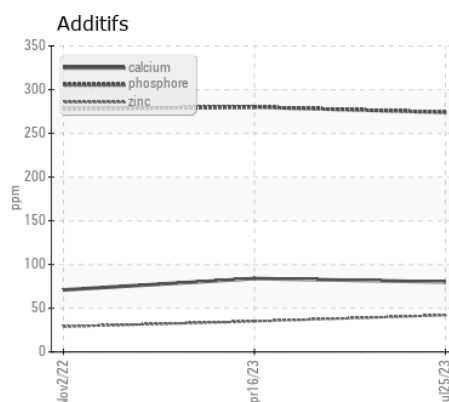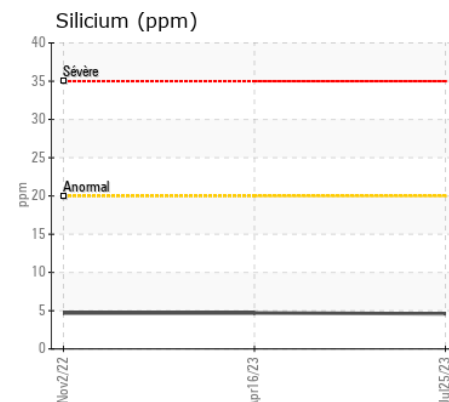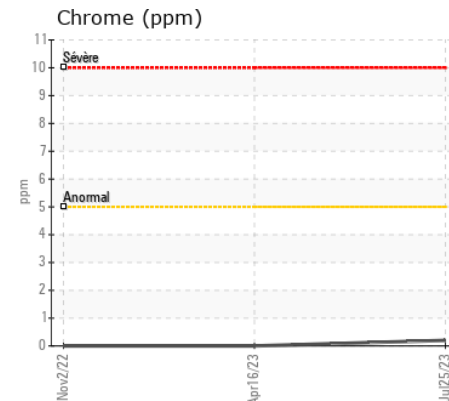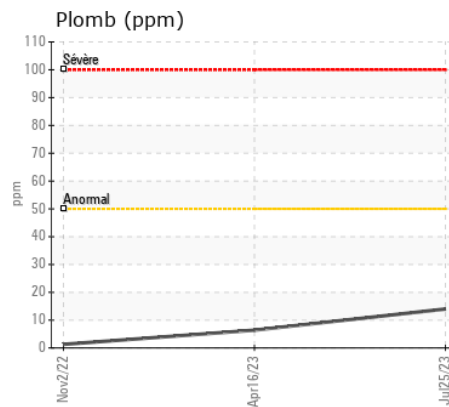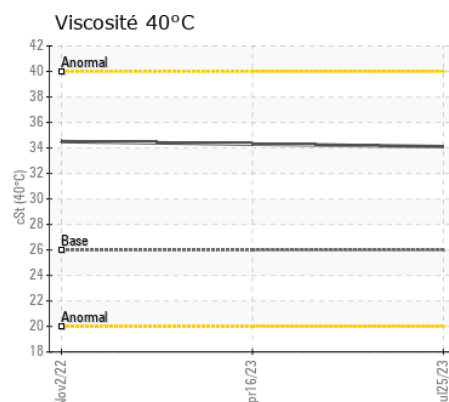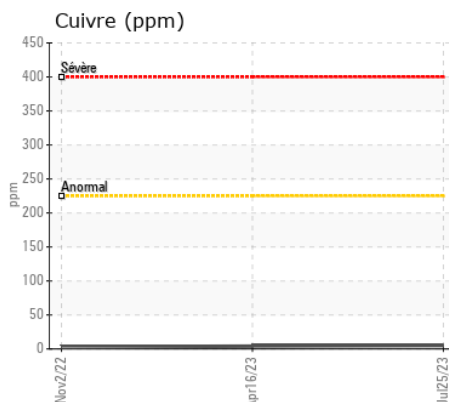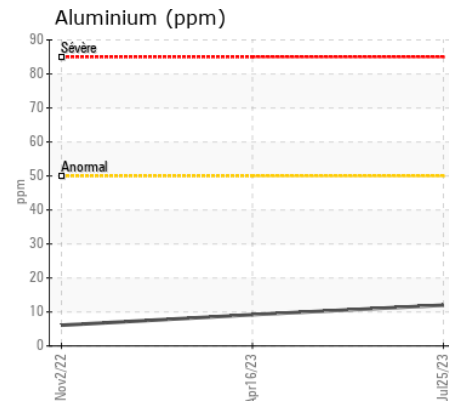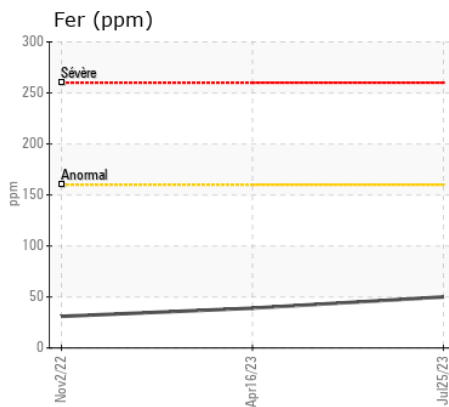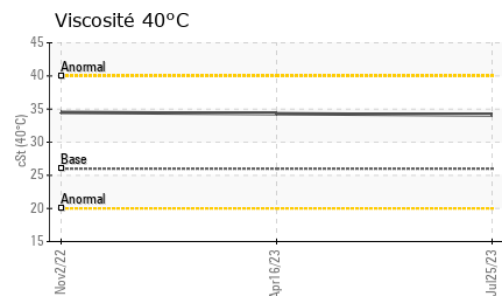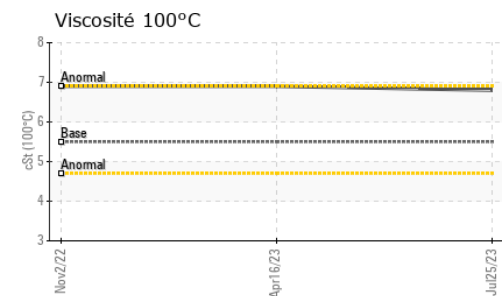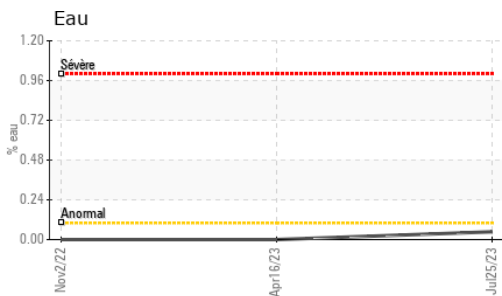

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.  
**N° d'échantillon** : PC0078271 **Reçu** : 26 Jul 2023  
**N° de laboratoire** : 02572415 **Diagnostiqué** : 27 Jul 2023  
**Numéro unique** : 5617466 **Diagnostiqueur** : Wes Davis  
**Analyse** : MOB 1 ( Additional Tests: KF, KV100, VI )

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.