



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

1216

Composant

Transmission (Auto)

Fluide

DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0078262	PC0070838	PC0067647
Date d'échant.		Client Info		25 Jul 2023	16 Apr 2023	11 Jan 2023
Âge d la Machine	hrs	Client Info		6889	6386	5923
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	129	119	110
Chrome	ppm	ASTM D5185(m)	>5	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	0	0	0
Aluminium	ppm	ASTM D5185(m)	>50	27	25	22
Plomb	ppm	ASTM D5185(m)	>50	28	28	27
Cuivre	ppm	ASTM D5185(m)	>225	15	12	10
Étain	ppm	ASTM D5185(m)	>10	5	4	4
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION












The water content is negligible. There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	8	8	7
Potassium	ppm	ASTM D5185(m)	>20	3	2	3
Eau	%	ASTM D6304*	>0.1	0.043	---	---
ppm d'eau	ppm	ASTM D6304*	>1000	432.8	---	---
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	VLITE	NONE	VLITE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	.2%	NEG	NEG

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	6	5
Bore	ppm	ASTM D5185(m)		65	68	67
Baryum	ppm	ASTM D5185(m)		<1	<1	0
Molybdène	ppm	ASTM D5185(m)		<1	<1	<1
Manganèse	ppm	ASTM D5185(m)		2	2	2
Magnésium	ppm	ASTM D5185(m)		1	<1	<1
Calcium	ppm	ASTM D5185(m)		92	96	100
Phosphore	ppm	ASTM D5185(m)		231	241	232
Zinc	ppm	ASTM D5185(m)		22	20	21
Soufre	ppm	ASTM D5185(m)		1015	1068	1045
Visc 40°C	cSt	ASTM D7279(m)	26.0	32.6	32.8	32.8
Visc 100°C	cSt	ASTM D7279(m)	5.5	6.4	6.4	6.5
Indice de viscosité (VI)	Scale	ASTM D2270*	155	152	150	156

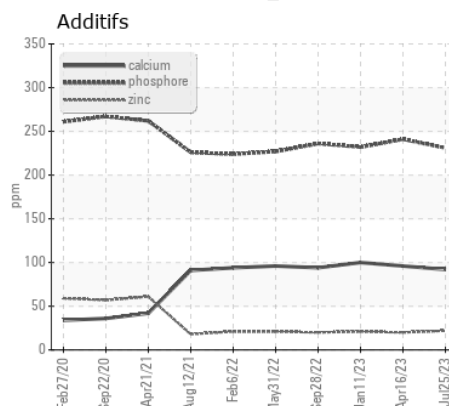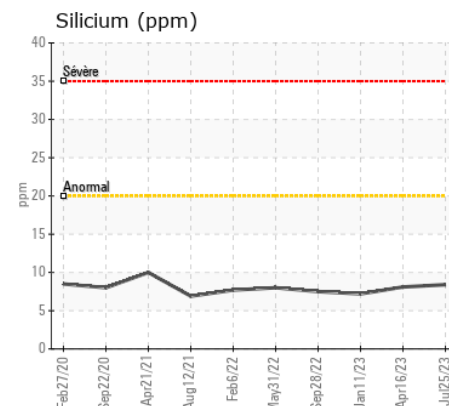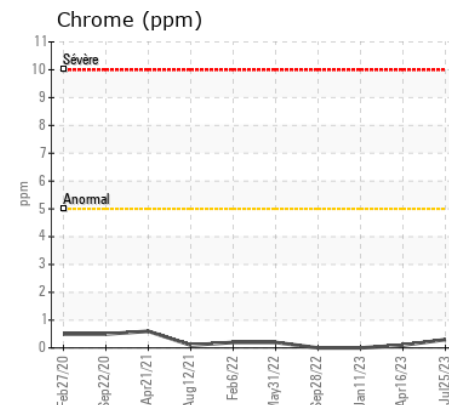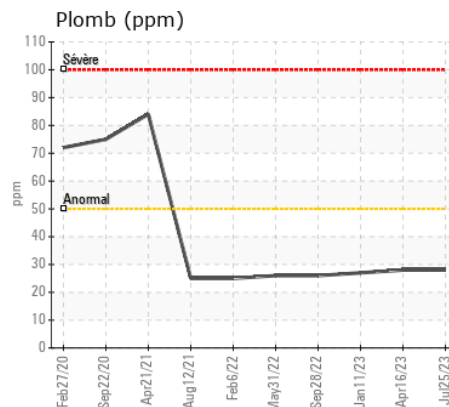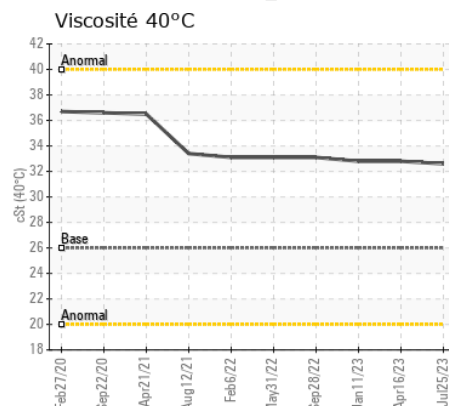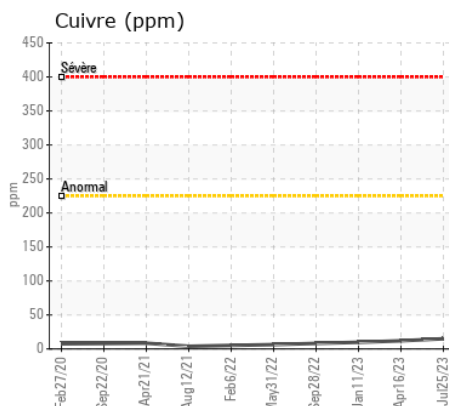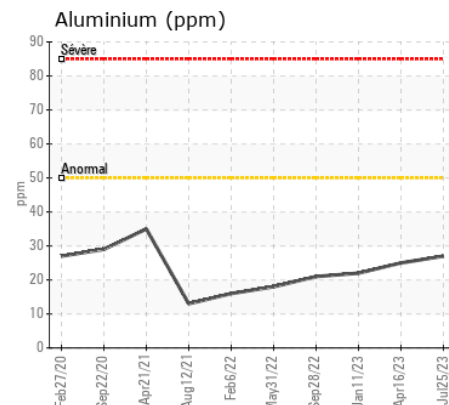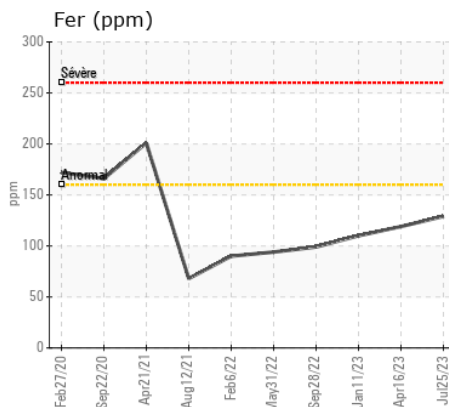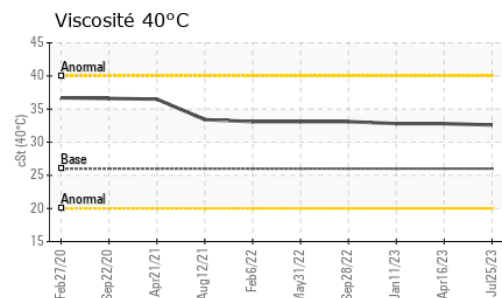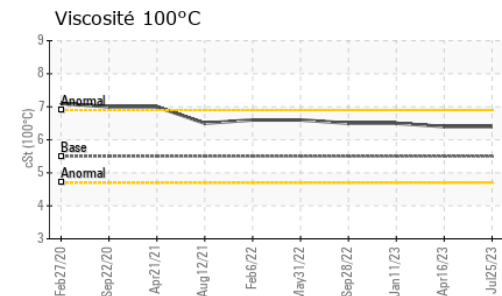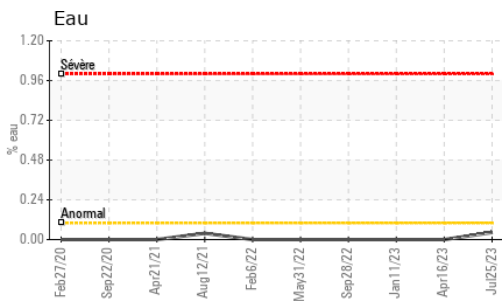

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**
N° d'échantillon : PC0078262 **Reçu** : 26 Jul 2023 270 RUE BRUNET
N° de laboratoire : 02572417 **Diagnostiqué** : 27 Jul 2023 MONT ST-HILAIRE, QC
Numéro unique : 5617468 **Diagnostiqueur** : Wes Davis CA J3H 0M6
Analyse : MOB 1 (Additional Tests: KF, KV100, VI) Contact: Martin Trudel

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131. mtrudel@michaudville.com
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T:
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada. F: