



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur
MICHAUDVILLE
Identité de la machine
1219

Composant
Transmission (Auto)
Fluide
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0078260	PC0070791	PC0067154
Date d'échant.		Client Info		25 Jul 2023	21 Feb 2023	17 Nov 2022
Âge d la Machine	kms	Client Info		248149	10528	10068
Âge de l'huile	kms	Client Info		0	0	0
Âge du filtre	kms	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	65	64	48
Chrome	ppm	ASTM D5185(m)	>5	<1	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	0	0
Titane	ppm	ASTM D5185(m)		<1	0	0
Argent	ppm	ASTM D5185(m)	>5	0	0	0
Aluminium	ppm	ASTM D5185(m)	>50	26	21	17
Plomb	ppm	ASTM D5185(m)	>50	9	9	9
Cuivre	ppm	ASTM D5185(m)	>225	10	7	5
Étain	ppm	ASTM D5185(m)	>10	2	2	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	17	8	7
Potassium	ppm	ASTM D5185(m)	>20	2	1	<1
Limon	scalar	Visual*	NONE	VLITE	NONE	NONE
Débris	scalar	Visual*	NONE	VLITE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	3	3
Bore	ppm	ASTM D5185(m)		72	79	81
Baryum	ppm	ASTM D5185(m)		0	0	0
Molybdène	ppm	ASTM D5185(m)		<1	0	0
Manganèse	ppm	ASTM D5185(m)		<1	<1	<1
Magnésium	ppm	ASTM D5185(m)		2	<1	<1
Calcium	ppm	ASTM D5185(m)		107	106	100
Phosphore	ppm	ASTM D5185(m)		228	248	243
Zinc	ppm	ASTM D5185(m)		12	9	8
Soufre	ppm	ASTM D5185(m)		1160	1250	1212
Visc 40°C	cSt	ASTM D7279(m)	26.0	33.7	33.9	34.1
Visc 100°C	cSt	ASTM D7279(m)	5.5	6.6	6.7	6.8
Indice de viscosité (VI)	Scale	ASTM D2270*	155	155	158	162

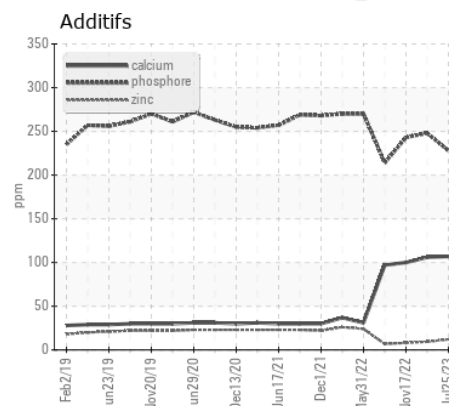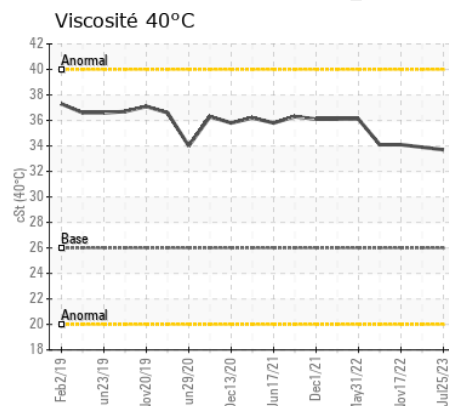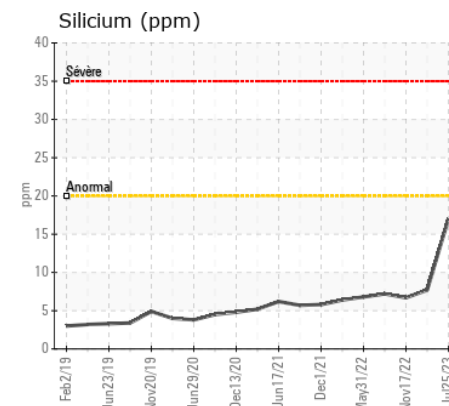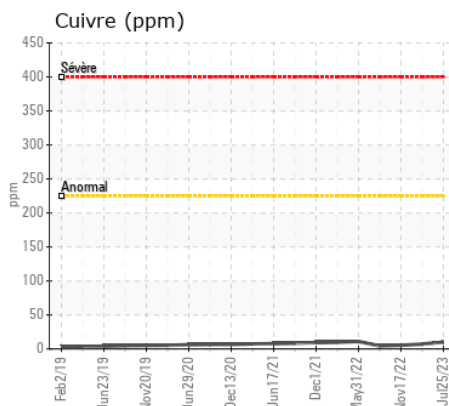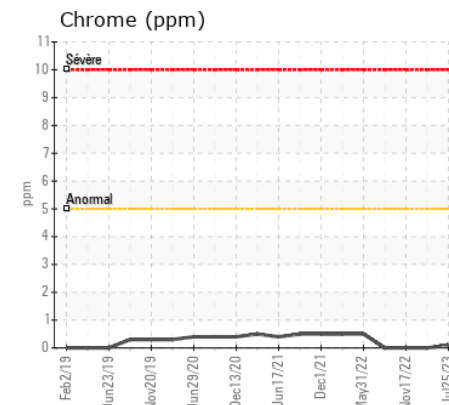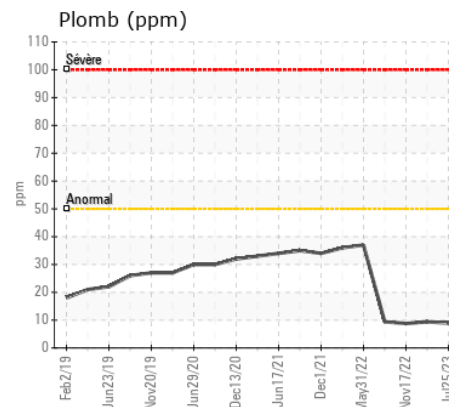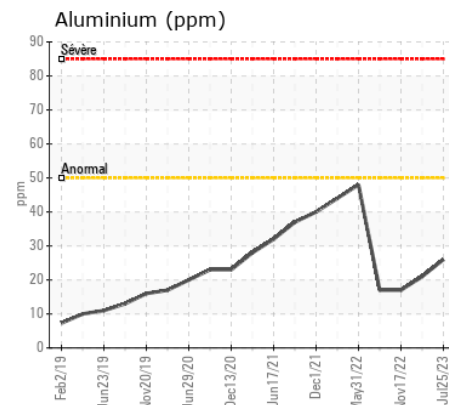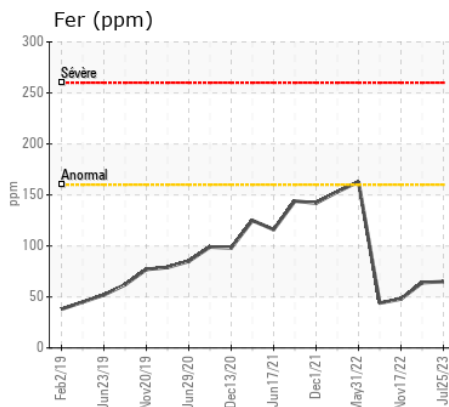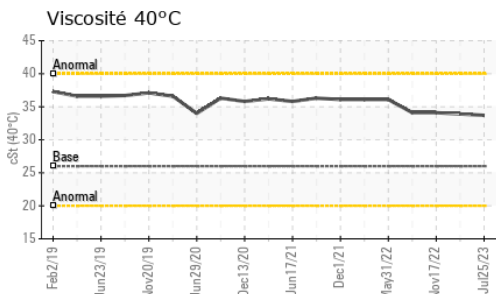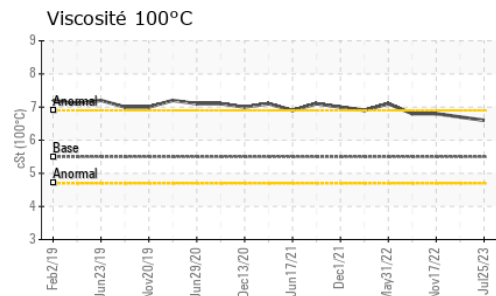

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**
N° d'échantillon : PC0078260 **Reçu** : 26 Jul 2023
N° de laboratoire : 02572418 **Diagnostiqué** : 27 Jul 2023
Numéro unique : 5617469 **Diagnostiqueur** : Wes Davis
Analyse : MOB 1 (Additional Tests: KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.