



USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Identité de la machine

**6701**

Composant

**Système hydraulique**

Fluide

**NOT GIVEN (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

**USURE**

All component wear rates are normal.











**CONTAMINATION**

There is no indication of any contamination in the component(unconfirmed).

**ÉTAT DU FLUIDE**

Viscosity of sample indicates oil is within ISO 68 range, advise investigate. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0078359</b>	PC0066550	PC0066068
Date d'échant.		Client Info		<b>13 Sep 2023</b>	24 Apr 2023	08 Nov 2022
Âge d la Machine	hrs	Client Info		<b>4078</b>	3955	3932
Âge de l'huile	hrs	Client Info		<b>0</b>	0	0
Âge du filtre	hrs	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>NORMAL</b>	NORMAL	NORMAL
Fer	ppm	ASTM D5185(m)	>20	<b>4</b>	3	3
Chrome	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	0	<1
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	0	<1
Plomb	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Cuivre	ppm	ASTM D5185(m)	>75	<b>1</b>	<1	<1
Étain	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Limon	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Débris	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Saleté	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Bore	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Baryum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdène	ppm	ASTM D5185(m)		<b>1</b>	<1	<1
Manganèse	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnésium	ppm	ASTM D5185(m)		<b>20</b>	6	6
Calcium	ppm	ASTM D5185(m)		<b>247</b>	181	183
Phosphore	ppm	ASTM D5185(m)		<b>528</b>	511	527
Zinc	ppm	ASTM D5185(m)		<b>581</b>	561	565
Soufre	ppm	ASTM D5185(m)		<b>1180</b>	1153	1143
Visc 40°C	cSt	ASTM D7279(m)		<b>57.0</b>	57.3	56.7
Visc 100°C	cSt	ASTM D7279(m)		<b>8.3</b>	8.1	8.2
Indice de viscosité (VI)	Scale	ASTM D2270*		<b>116</b>	109	114

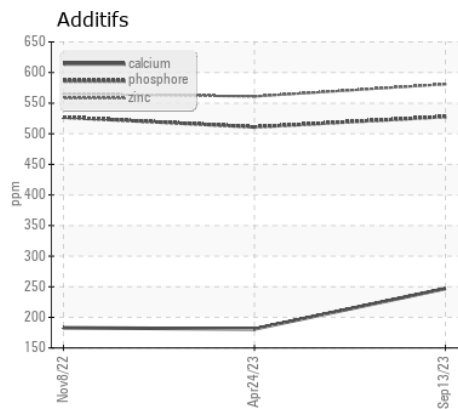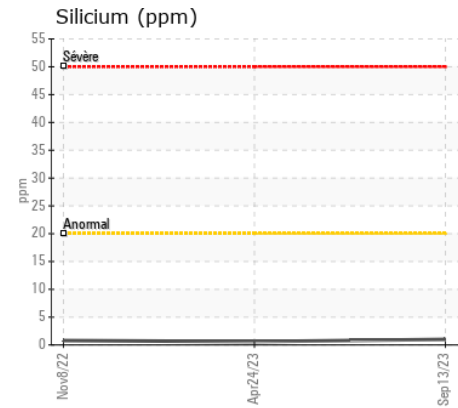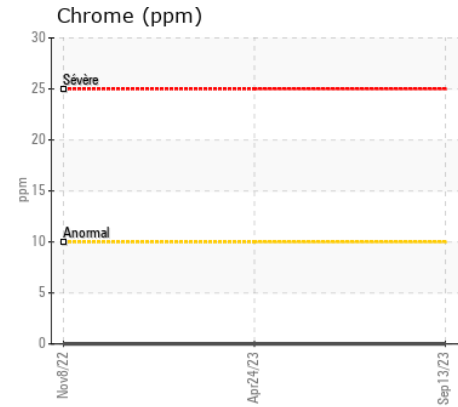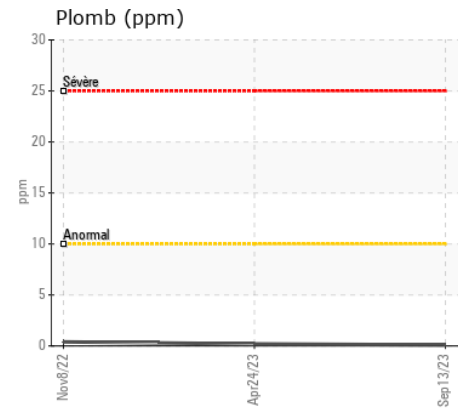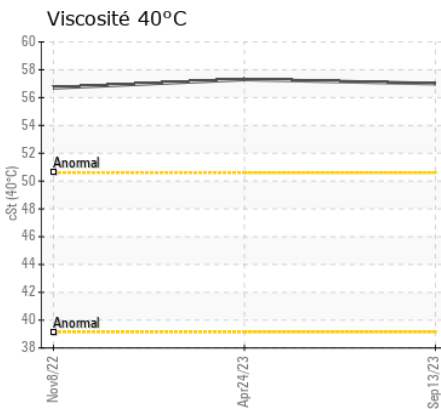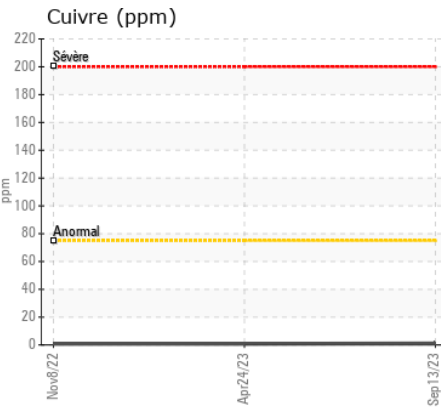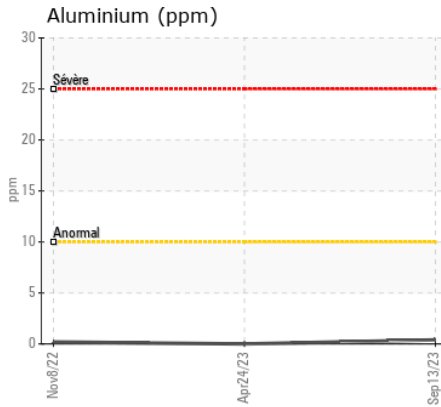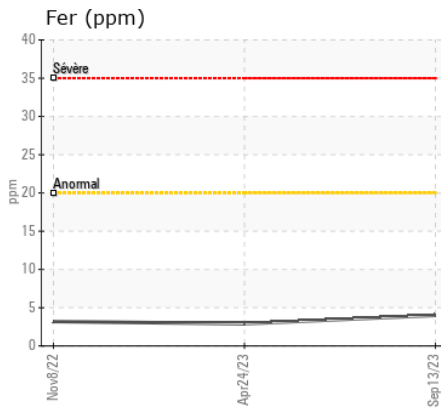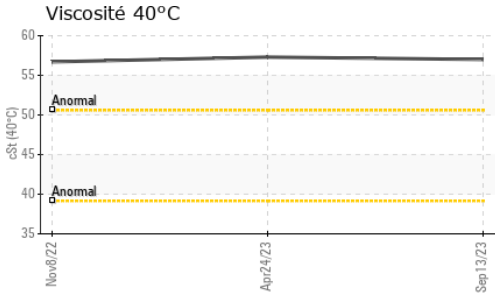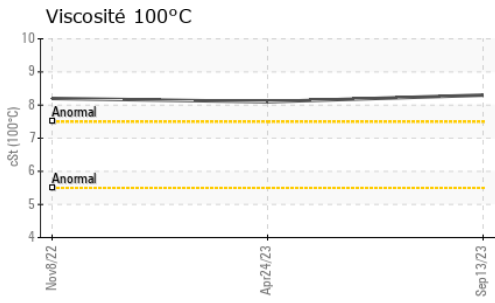

ISO 17025:2017  
Accredited  
Laboratory

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.  
**N° d'échantillon** : PC0078359 **Reçu** : 14 Sep 2023  
**N° de laboratoire** : 02582523 **Diagnostiqué** : 15 Sep 2023  
**Numéro unique** : 5643588 **Diagnostiqueur** : Kevin Marson  
**Analyse** : MOB 1 ( Additional Tests: KV100, VI )

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET  
MONT ST-HILAIRE, QC  
CA J3H 0M6  
Contact: Martin Trudel  
mtrudel@michaudville.com

T:  
F: