



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur
MICHAUDVILLE

Identité de la machine

1221

Composant

Transmission (Auto)

Fluide

DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0077387	PC0072223	PC0067801
Date d'échant.		Client Info		13 Sep 2023	24 May 2023	18 Dec 2022
Âge d la Machine	hrs	Client Info		10510	9993	9416
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	57	54	50
Chrome	ppm	ASTM D5185(m)	>5	<1	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	0	0	0
Aluminium	ppm	ASTM D5185(m)	>50	22	22	18
Plomb	ppm	ASTM D5185(m)	>50	14	14	14
Cuivre	ppm	ASTM D5185(m)	>225	16	16	14
Étain	ppm	ASTM D5185(m)	>10	2	2	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION












The water content is negligible. There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	5	5	5
Potassium	ppm	ASTM D5185(m)	>20	1	2	1
Eau	%	ASTM D6304*	>0.1	0.043	---	---
ppm d'eau	ppm	ASTM D6304*	>1000	438.6	---	---
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	.2%	NEG	NEG

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	5	4
Bore	ppm	ASTM D5185(m)		119	130	129
Baryum	ppm	ASTM D5185(m)		0	0	0
Molybdène	ppm	ASTM D5185(m)		0	0	0
Manganèse	ppm	ASTM D5185(m)		<1	<1	<1
Magnésium	ppm	ASTM D5185(m)		2	<1	<1
Calcium	ppm	ASTM D5185(m)		57	54	48
Phosphore	ppm	ASTM D5185(m)		330	347	338
Zinc	ppm	ASTM D5185(m)		12	11	8
Soufre	ppm	ASTM D5185(m)		722	701	686
Visc 40°C	cSt	ASTM D7279(m)	26.0	36.5	36.8	36.6
Visc 100°C	cSt	ASTM D7279(m)	5.5	7.1	7.1	7.3
Indice de viscosité (VI)	Scale	ASTM D2270*	155	160	158	169

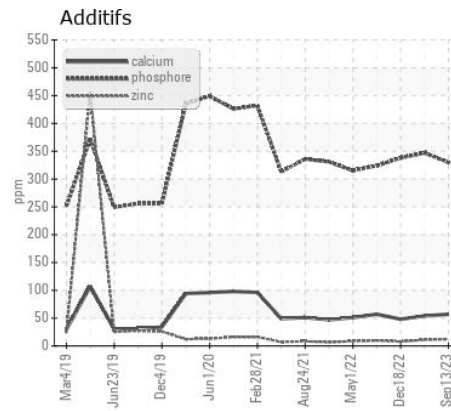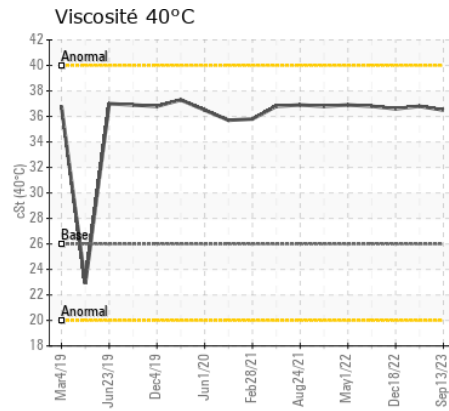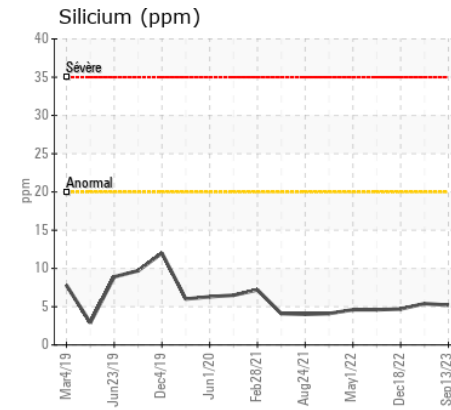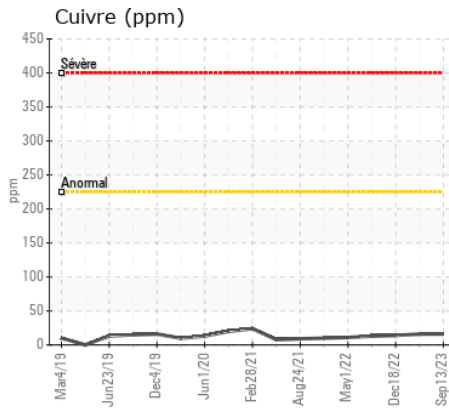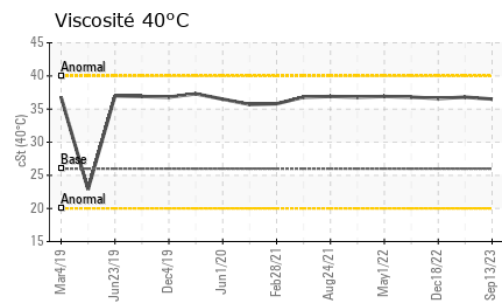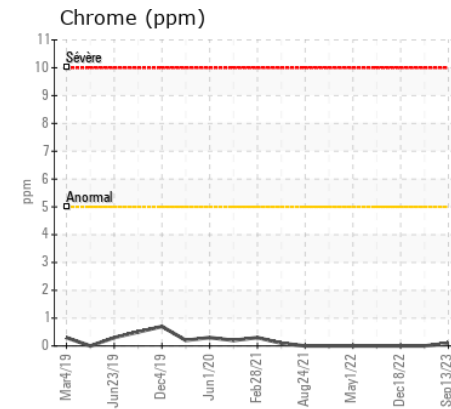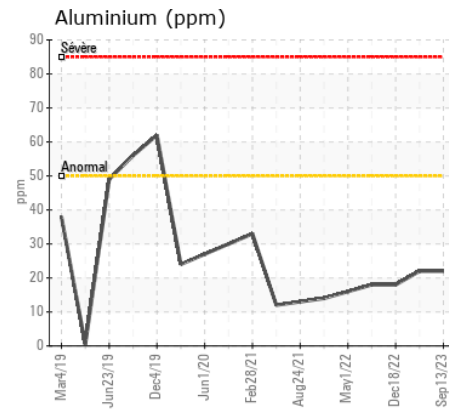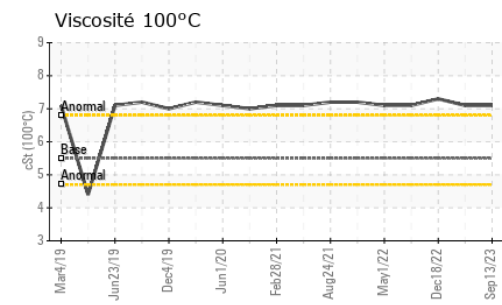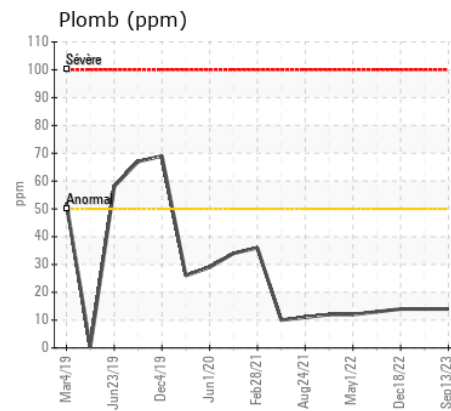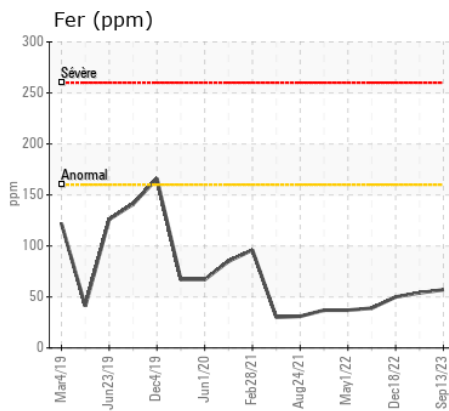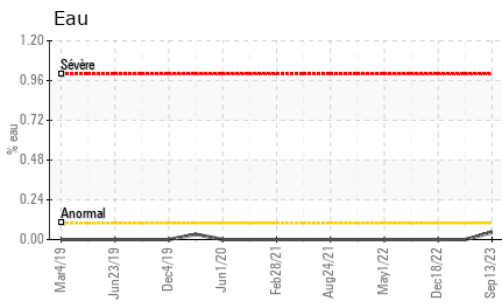

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**
N° d'échantillon : PC0077387 **Reçu** : 14 Sep 2023
N° de laboratoire : 02582542 **Diagnostiqué** : 15 Sep 2023
Numéro unique : 5643607 **Diagnostiqueur** : Wes Davis
Analyse : MOB 1 (Additional Tests: KF, KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.