



USURE	ANORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

1224

Composant

Transmission (Auto)

Fluide

ATF (PAO) (--- GAL)

RECOMMENDATION

We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) ATF (PAO). Please confirm. Please specify the component make and model with your next sample.

USURE

Aluminum ppm levels are abnormal. Torque converter wear is indicated.

CONTAMINATION

The water content is negligible. There is no indication of any contamination in the fluid.

ÉTAT DU FLUIDE













The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0078090	PC0056543	PC0066477
Date d'échant.		Client Info		13 Sep 2023	14 Feb 2023	03 Nov 2022
Âge d la Machine	hrs	Client Info		5825	4877	4316
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				ABNORMAL	NORMAL	NORMAL

Fer	ppm	ASTM D5185(m)	>160	137	114	110
Chrome	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	0	0	0
Aluminium	ppm	ASTM D5185(m)	>50	▲ 58	48	47
Plomb	ppm	ASTM D5185(m)	>50	47	43	41
Cuivre	ppm	ASTM D5185(m)	>225	14	12	12
Étain	ppm	ASTM D5185(m)	>10	6	5	5
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	VLITE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

Silicium	ppm	ASTM D5185(m)	>20	10	8	8
Potassium	ppm	ASTM D5185(m)	>20	5	4	4
Eau	%	ASTM D6304*	>0.1	0.035	---	---
ppm d'eau	ppm	ASTM D6304*	>1000	353.7	---	---
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	.2%	NEG	NEG

Sodium	ppm	ASTM D5185(m)		8	7	8
Bore	ppm	ASTM D5185(m)	175	82	88	90
Baryum	ppm	ASTM D5185(m)	5	1	<1	1
Molybdène	ppm	ASTM D5185(m)	5	1	1	1
Manganèse	ppm	ASTM D5185(m)		2	2	2
Magnésium	ppm	ASTM D5185(m)	5	1	<1	2
Calcium	ppm	ASTM D5185(m)	125	41	41	44
Phosphore	ppm	ASTM D5185(m)	290	271	275	276
Zinc	ppm	ASTM D5185(m)	10	6	5	6
Soufre	ppm	ASTM D5185(m)	400	318	335	340
Visc 40°C	cSt	ASTM D7279(m)	32.3	36.6	36.6	36.6
Visc 100°C	cSt	ASTM D7279(m)	7.5	7	7.1	7.1
Indice de viscosité (VI)	Scale	ASTM D2270*	211	155	160	160

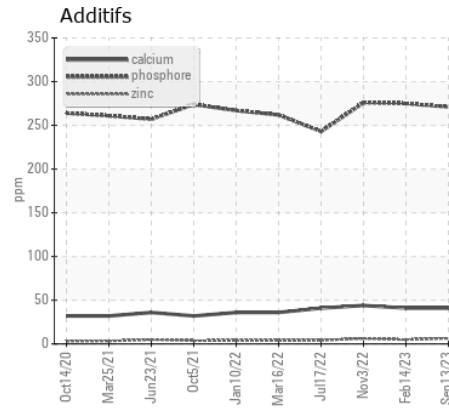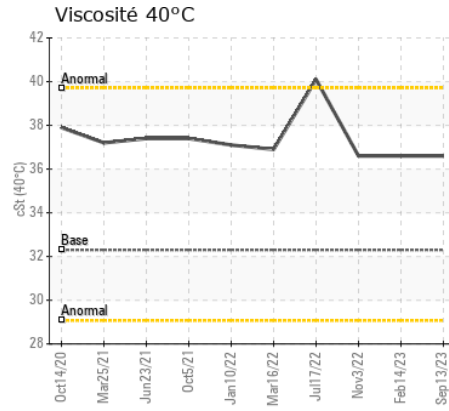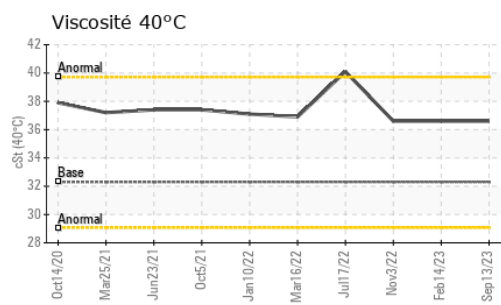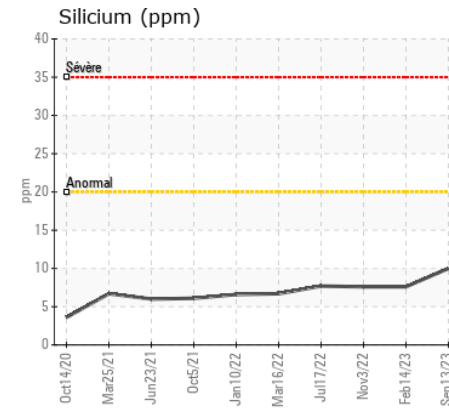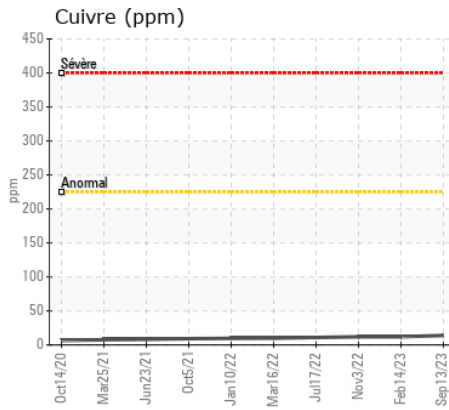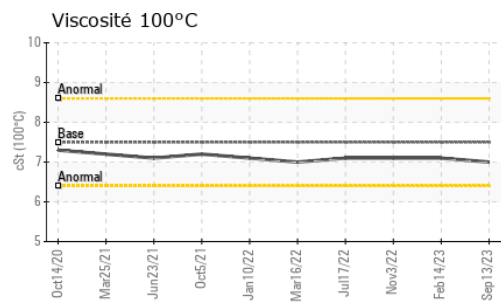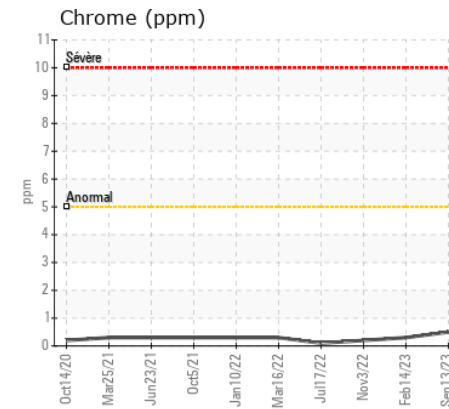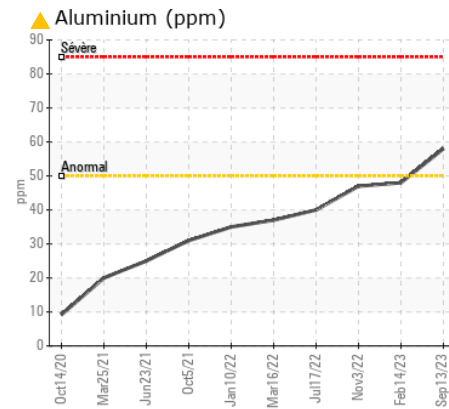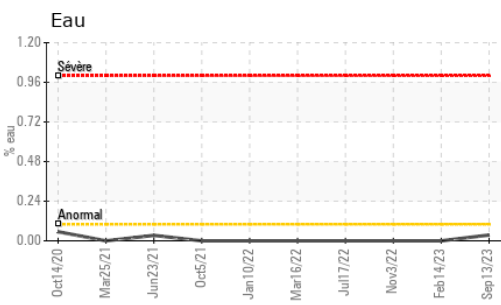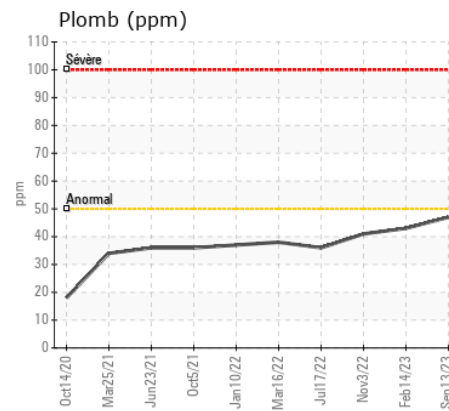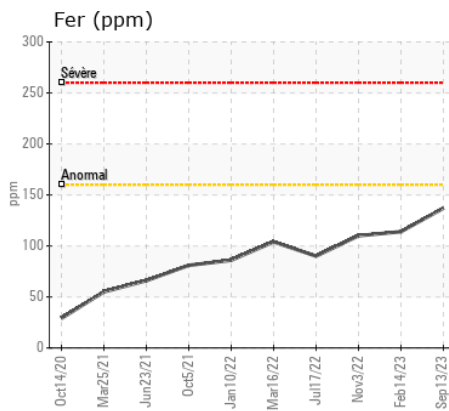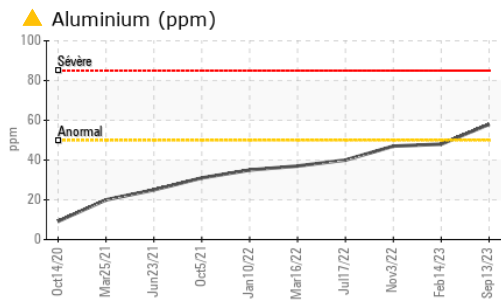

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.
N° d'échantillon : PC0078090 **Reçu** : 14 Sep 2023
N° de laboratoire : 02582547 **Diagnostiqueur** : Kevin Marson
Numéro unique : 5643612 **Diagnostiqueur** : Kevin Marson
Analyse : MOB 1 (Additional Tests: KF, KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.