



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur
MICHAUDVILLE

Identité de la machine

1220

Composant

Transmission (Auto)

Fluide

DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0077386	PC0072336	PC0067807
Date d'échant.		Client Info		13 Sep 2023	10 May 2023	18 Dec 2022
Âge d la Machine	hrs	Client Info		9863	9551	8792
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	109	92	84
Chrome	ppm	ASTM D5185(m)	>5	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	0	0	0
Aluminium	ppm	ASTM D5185(m)	>50	28	27	24
Plomb	ppm	ASTM D5185(m)	>50	54	50	45
Cuivre	ppm	ASTM D5185(m)	>225	48	40	32
Étain	ppm	ASTM D5185(m)	>10	4	4	3
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION













The water content is negligible. There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	7	6	6
Potassium	ppm	ASTM D5185(m)	>20	2	2	2
Eau	%	ASTM D6304*	>0.1	0.064	---	---
ppm d'eau	ppm	ASTM D6304*	>1000	649.2	---	---
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	.2%	NEG	NEG

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		10	10	9
Bore	ppm	ASTM D5185(m)		176	189	178
Baryum	ppm	ASTM D5185(m)		0	0	0
Molybdène	ppm	ASTM D5185(m)		0	<1	0
Manganèse	ppm	ASTM D5185(m)		1	2	1
Magnésium	ppm	ASTM D5185(m)		<1	<1	<1
Calcium	ppm	ASTM D5185(m)		128	136	135
Phosphore	ppm	ASTM D5185(m)		484	507	476
Zinc	ppm	ASTM D5185(m)		25	22	22
Soufre	ppm	ASTM D5185(m)		2230	2257	2146
Visc 40°C	cSt	ASTM D7279(m)	26.0	35.1	35.3	35.4
Visc 100°C	cSt	ASTM D7279(m)	5.5	6.9	7	7
Indice de viscosité (VI)	Scale	ASTM D2270*	155	160	164	163

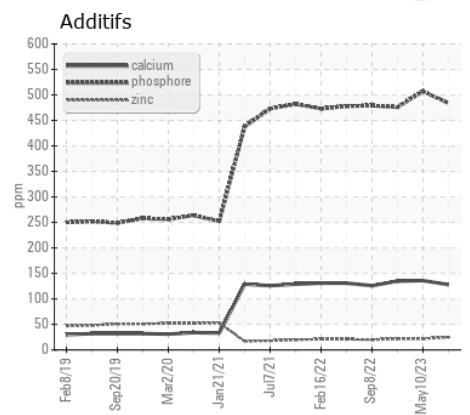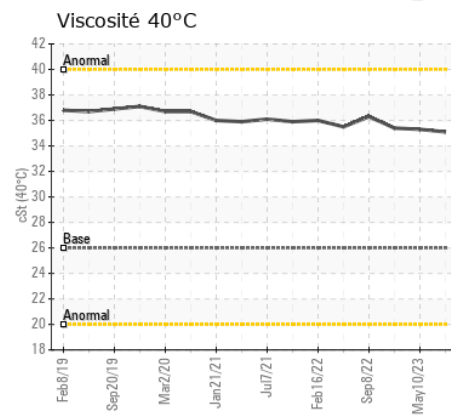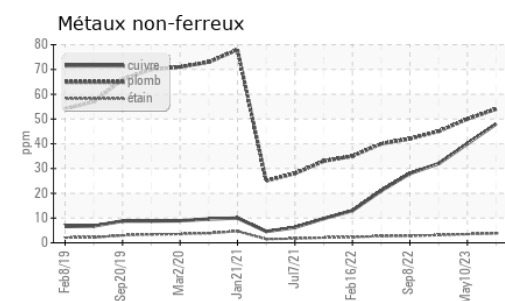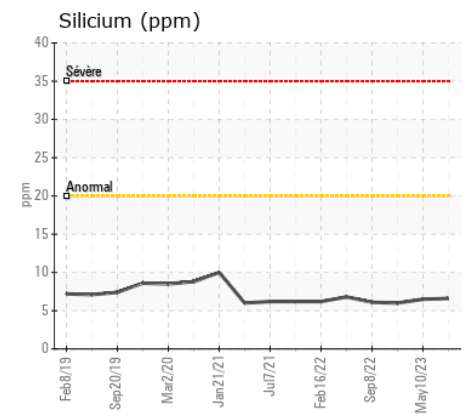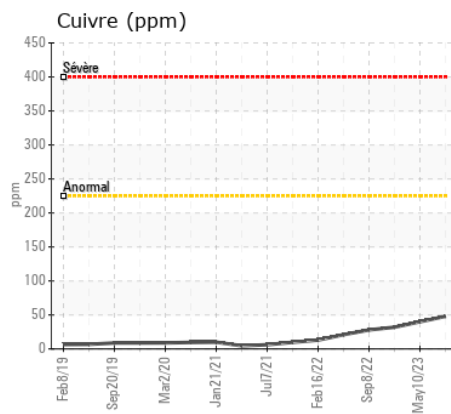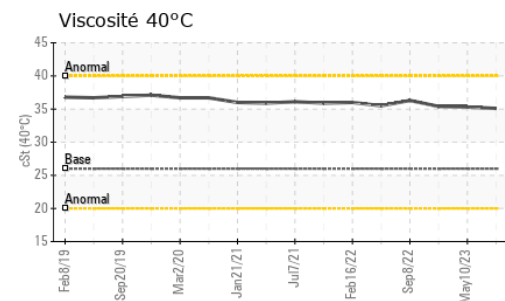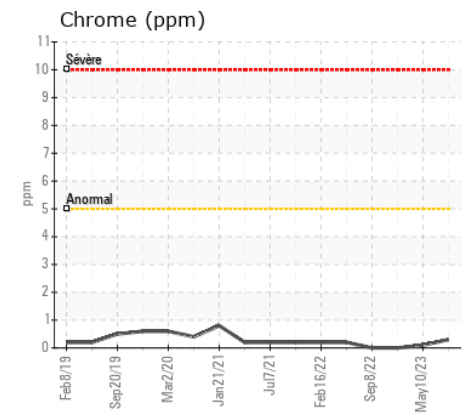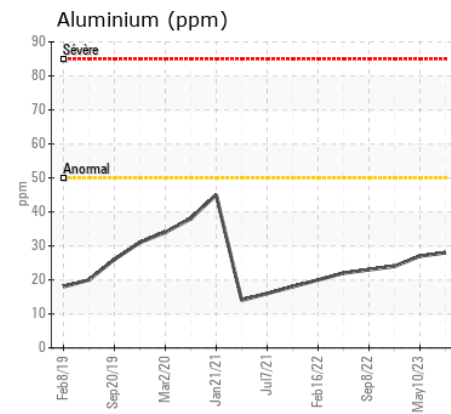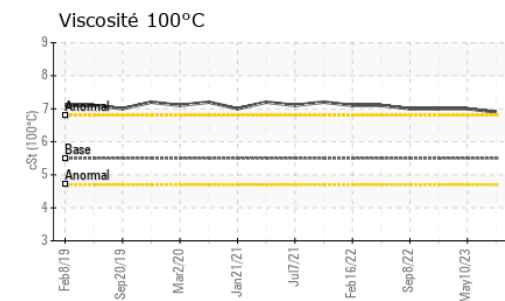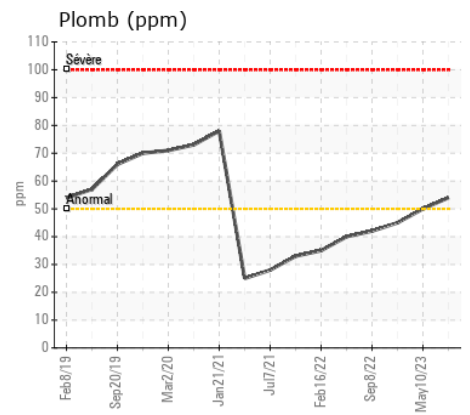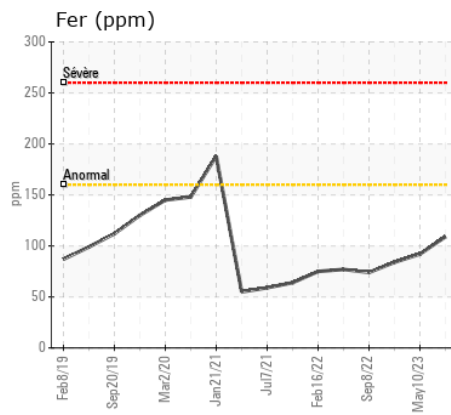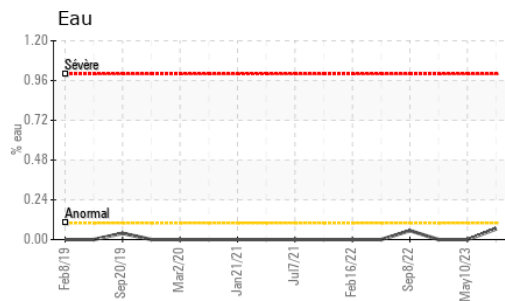

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUDVILLE INC.**
N° d'échantillon : PC0077386 **Reçu** : 14 Sep 2023 270 RUE BRUNET
N° de laboratoire : 02582567 **Diagnostiqué** : 15 Sep 2023 MONT ST-HILAIRE, QC
Numéro unique : 5643632 **Diagnostiqueur** : Kevin Marson CA J3H 0M6
Analyse : MOB 1 (Additional Tests: KF, KV100, VI) Contact: Martin Trudel

Pour discuter cetter rapport, contacter le service à la clientèle au 1-800-268-2131. mtrudel@michaudville.com
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T:
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada. F: