



Secteur  
**MICHAUDVILLE**

Identité de la machine

**1227**

Composant

**Transmission (Auto)**

Fluide

**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0082244</b>	PC0075983	PC0067137
Date d'échant.		Client Info		<b>20 Sep 2023</b>	20 Jun 2023	11 Jan 2023
Âge d la Machine	hrs	Client Info		<b>3825</b>	3341	2859
Âge de l'huile	hrs	Client Info		<b>0</b>	0	0
Âge du filtre	hrs	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>NORMAL</b>	NORMAL	NORMAL

**USURE**

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	<b>85</b>	44	68
Chrome	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminium	ppm	ASTM D5185(m)	>50	<b>49</b>	16	34
Plomb	ppm	ASTM D5185(m)	>50	<b>49</b>	20	40
Cuivre	ppm	ASTM D5185(m)	>225	<b>17</b>	5	12
Étain	ppm	ASTM D5185(m)	>10	<b>5</b>	2	4
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**











There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	<b>7</b>	4	5
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	2	5
Limon	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Débris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Saleté	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

**ÉTAT DU FLUIDE**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>8</b>	4	6
Bore	ppm	ASTM D5185(m)		<b>93</b>	52	97
Baryum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Molybdène	ppm	ASTM D5185(m)		<b>1</b>	<1	<1
Manganèse	ppm	ASTM D5185(m)		<b>2</b>	<1	2
Magnésium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>42</b>	25	46
Phosphore	ppm	ASTM D5185(m)		<b>301</b>	130	293
Zinc	ppm	ASTM D5185(m)		<b>6</b>	4	6
Soufre	ppm	ASTM D5185(m)		<b>696</b>	349	704
Visc 40°C	cSt	ASTM D7279(m)	26.0	<b>36.3</b>	36.5	36.6
Visc 100°C	cSt	ASTM D7279(m)	5.5	<b>7.2</b>	7.1	7.2
Indice de viscosité (VI)	Scale	ASTM D2270*	155	<b>166</b>	160	164

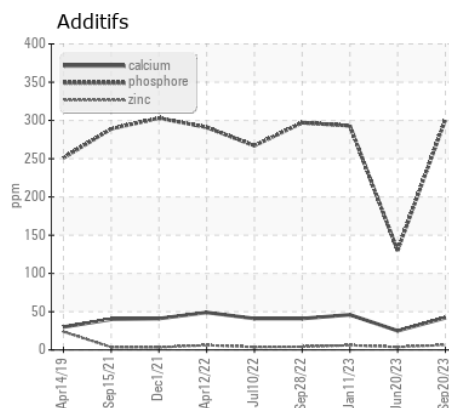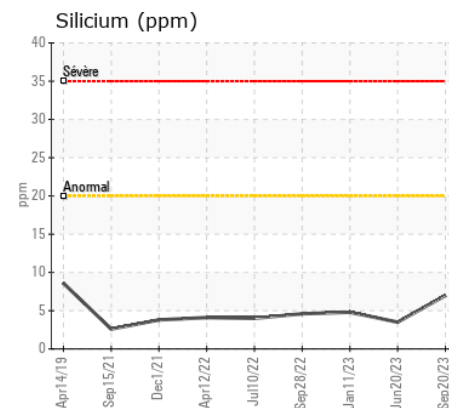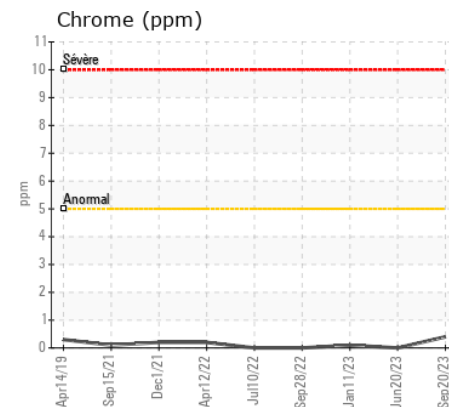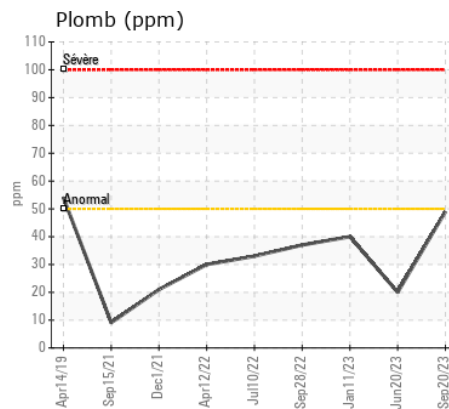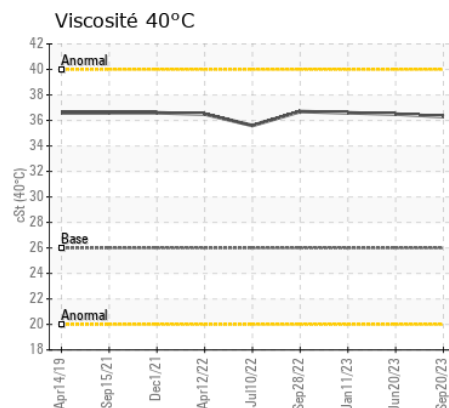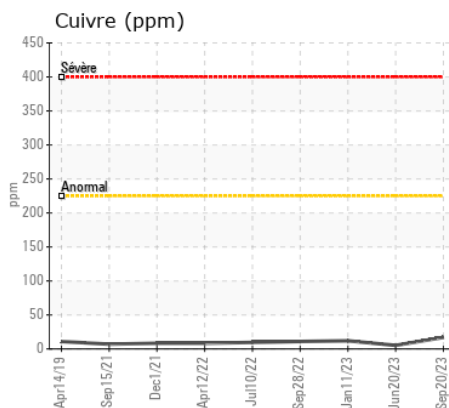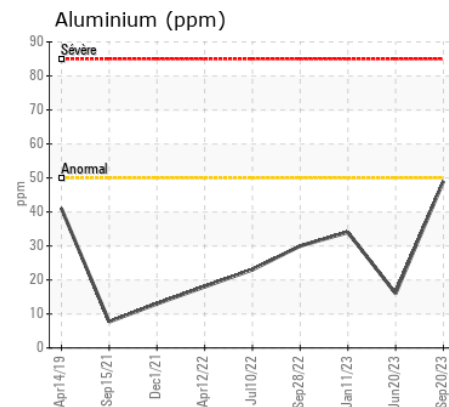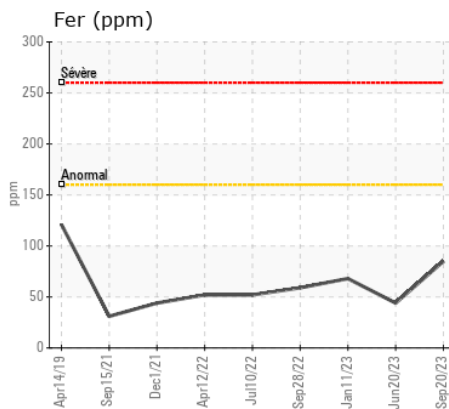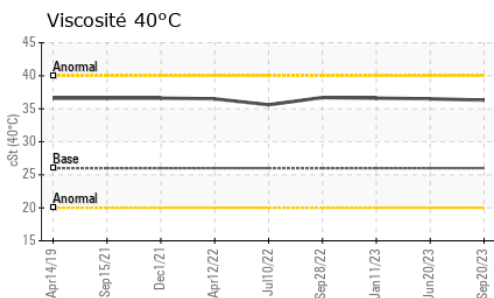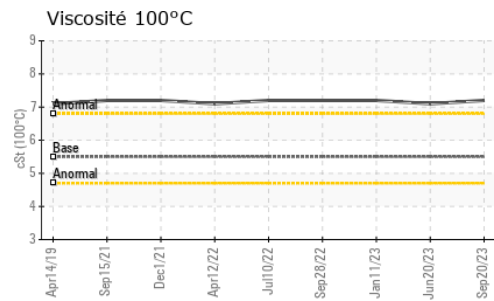

ISO 17025:2017  
Accredited  
Laboratory

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**  
**N° d'échantillon** : PC0082244 **Reçu** : 21 Sep 2023 270 RUE BRUNET  
**N° de laboratoire** : 02584458 **Diagnostiqué** : 21 Sep 2023 MONT ST-HILAIRE, QC  
**Numéro unique** : 5645523 **Diagnostiqueur** : Bill Quesnel CA J3H 0M6  
**Analyse** : MOB 1 ( Additional Tests: KV100, VI ) Contact: Martin Trudel

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

mtrudel@michaudville.com

T:

F: