



USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Secteur  
**MICHAUDVILLE**  
Identité de la machine  
**1206**

Composant  
**Transmission (Auto)**  
Fluide  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.  
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0075871</b>	PC0075987	PC0071534
Date d'échant.		Client Info		<b>10 Oct 2023</b>	20 Jun 2023	23 Feb 2023
Âge d la Machine	hrs	Client Info		<b>483</b>	18	330131
Âge de l'huile	hrs	Client Info		<b>0</b>	0	0
Âge du filtre	hrs	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>NORMAL</b>	NORMAL	NORMAL

**USURE**

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	<b>149</b>	134	130
Chrome	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0
Aluminium	ppm	ASTM D5185(m)	>50	<b>17</b>	17	16
Plomb	ppm	ASTM D5185(m)	>50	<b>19</b>	17	15
Cuivre	ppm	ASTM D5185(m)	>225	<b>24</b>	23	22
Étain	ppm	ASTM D5185(m)	>10	<b>3</b>	2	2
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**











There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	<b>7</b>	7	7
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	<1
Limon	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Débris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Saleté	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

**ÉTAT DU FLUIDE**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>9</b>	8	9
Bore	ppm	ASTM D5185(m)		<b>151</b>	144	152
Baryum	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Molybdène	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganèse	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Magnésium	ppm	ASTM D5185(m)		<b>2</b>	2	2
Calcium	ppm	ASTM D5185(m)		<b>159</b>	162	172
Phosphore	ppm	ASTM D5185(m)		<b>403</b>	437	447
Zinc	ppm	ASTM D5185(m)		<b>22</b>	22	21
Soufre	ppm	ASTM D5185(m)		<b>2037</b>	2053	2126
Visc 40°C	cSt	ASTM D7279(m)	26.0	<b>34.5</b>	34.5	34.6
Visc 100°C	cSt	ASTM D7279(m)	5.5	<b>6.8</b>	6.8	6.8
Indice de viscosité (VI)	Scale	ASTM D2270*	155	<b>159</b>	159	159

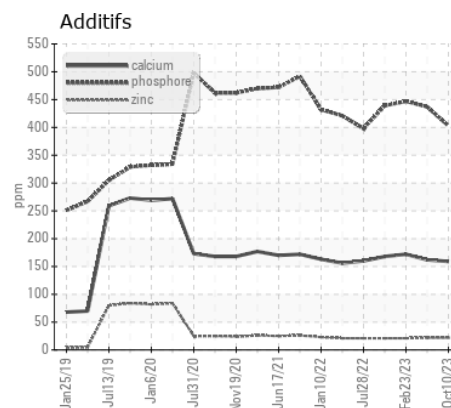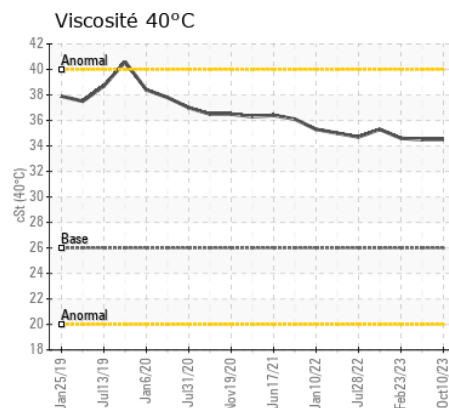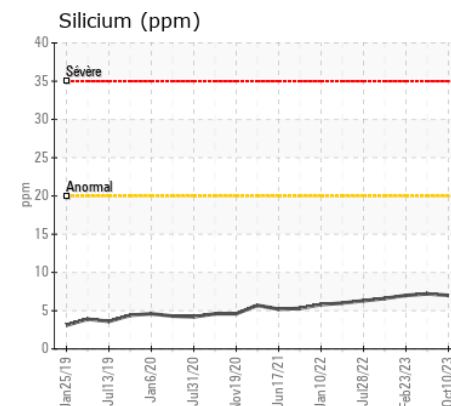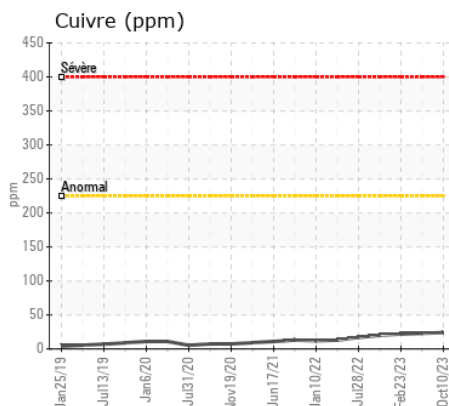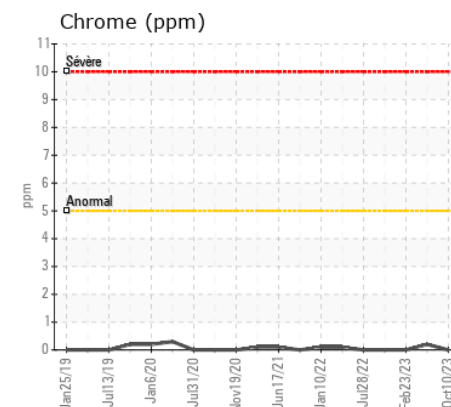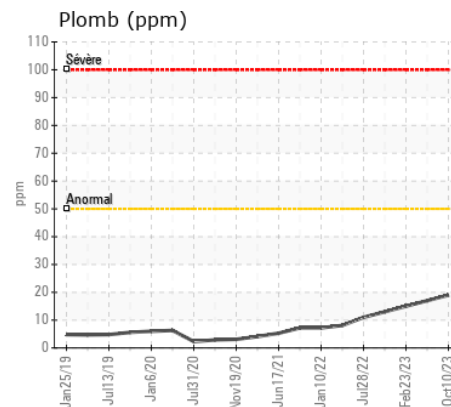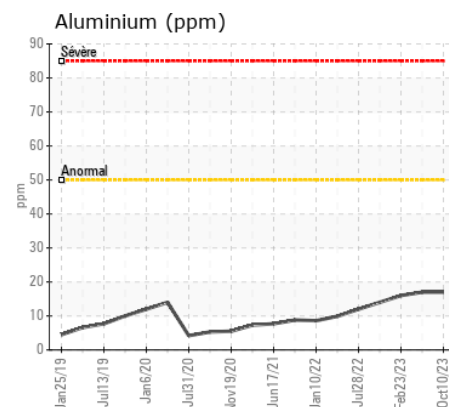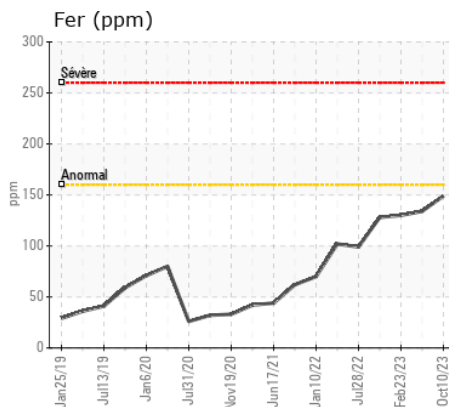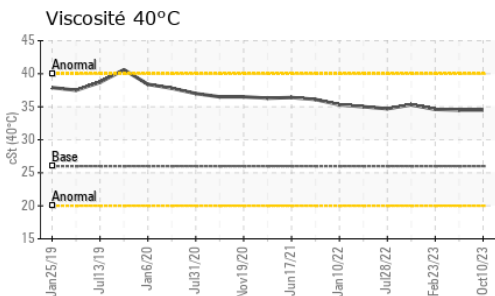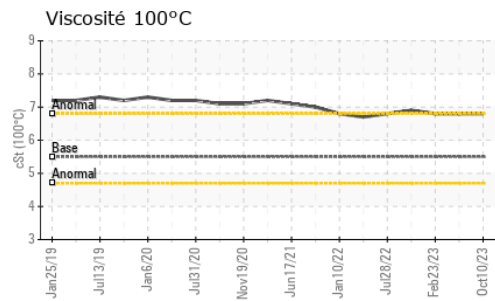

ISO 17025:2017  
Accredited  
Laboratory

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**  
**N° d'échantillon** : PC0075871 **Reçu** : 11 Oct 2023  
**N° de laboratoire** : 02588317 **Diagnostiqueur** : Wes Davis  
**Numéro unique** : 5657383  
**Analyse** : MOB 1 ( Additional Tests: KV100, VI )

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET  
MONT ST-HILAIRE, QC  
CA J3H 0M6  
Contact: Martin Trudel  
mtrudel@michaudville.com

T:  
F: