



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

52883

Composant

Moteur diesel

Fluide

PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		WC0857902	WC0787328	WC0758585
Date d'échant.		Client Info		10 Oct 2023	24 Mar 2023	16 Jan 2023
Âge d la Machine	mls	Client Info		27308	263782	237130
Âge de l'huile	mls	Client Info		27308	26609	34727
Âge du filtre	mls	Client Info		27308	26609	34727
Huile changée		Client Info		Changed	Changed	Changed
Filtre changé		Client Info		Changed	Changed	Changed
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

Metal levels are typical for a new component breaking in.

Fer	ppm	ASTM D5185(m)	>90	21	14	32
Chrome	ppm	ASTM D5185(m)	>20	<1	<1	1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titane	ppm	ASTM D5185(m)	>2	0	<1	<1
Argent	ppm	ASTM D5185(m)	>2	<1	0	0
Aluminium	ppm	ASTM D5185(m)	>20	6	3	7
Plomb	ppm	ASTM D5185(m)	>40	3	4	5
Cuivre	ppm	ASTM D5185(m)	>330	2	1	2
Étain	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	3	3	4
Potassium	ppm	ASTM D5185(m)	>20	8	2	14
Essence		WC Method	>3.0	<1.0	<1.0	<1.0
Glycol		WC Method		NEG	NEG	NEG
% de suie	%	ASTM D7844*	>6	0.2	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	9.1	9.1	9.8
Sulfatation	Abs/.1mm	ASTM D7415*	>30	20.5	20.2	22.5
Eau émulsifiée	scalar	Visual*	>0.2	NEG	NEG	NEG

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	1
Bore	ppm	ASTM D5185(m)	2	4	2	3
Baryum	ppm	ASTM D5185(m)	0	<1	0	0
Molybdène	ppm	ASTM D5185(m)	50	61	60	60
Manganèse	ppm	ASTM D5185(m)	0	0	<1	<1
Magnésium	ppm	ASTM D5185(m)	950	960	945	960
Calcium	ppm	ASTM D5185(m)	1050	1051	1142	1152
Phosphore	ppm	ASTM D5185(m)	995	1002	1063	1089
Zinc	ppm	ASTM D5185(m)	1180	1201	1206	1215
Soufre	ppm	ASTM D5185(m)	2600	2460	2531	2513
Oxydation	Abs/.1mm	ASTM D7414*	>25	16.3	17.0	17.8
Visc 100°C	cSt	ASTM D7279(m)	12.00	11.1	11.1	11.0

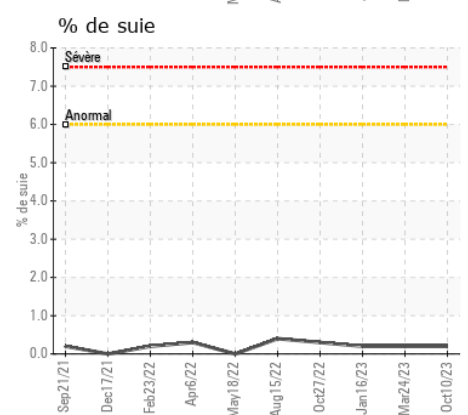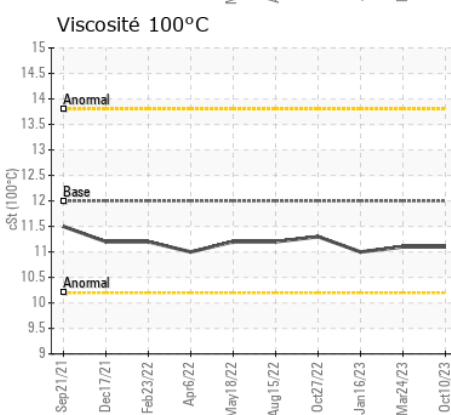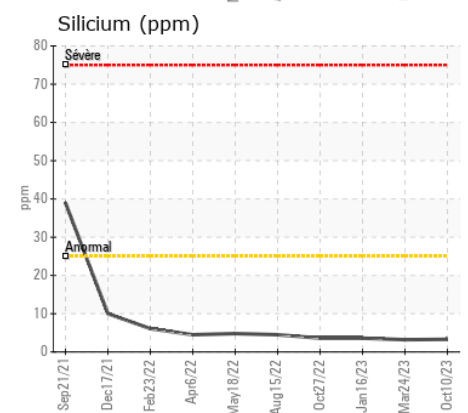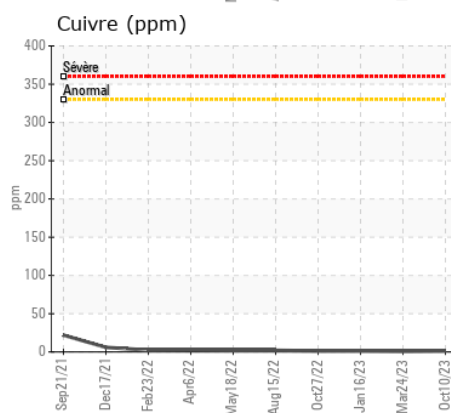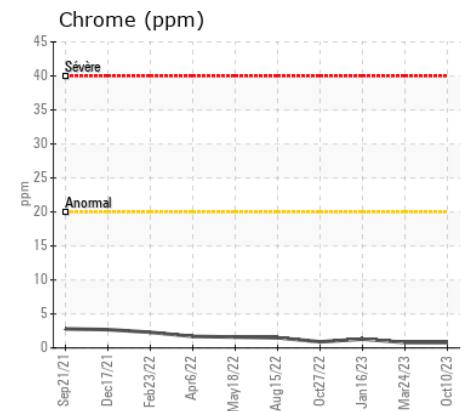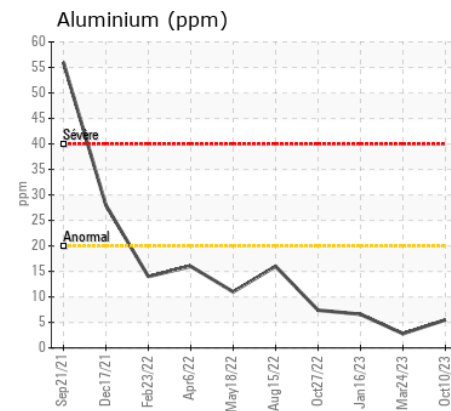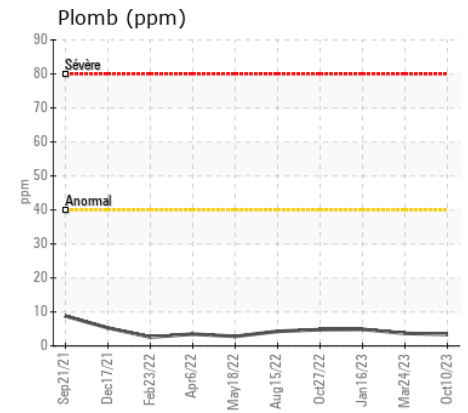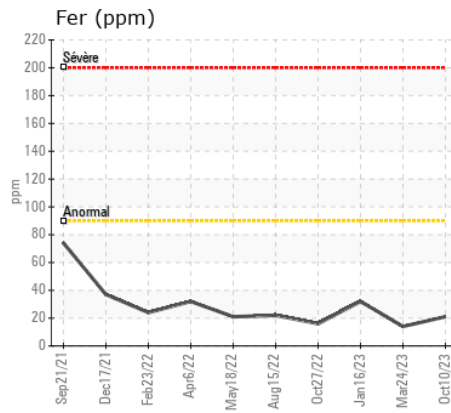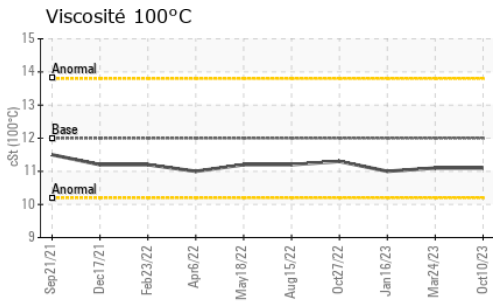

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
N° d'échantillon : WC0857902
N° de laboratoire : 02589222
Numéro unique : 5658288
Analyse : MOB 1

MANITOU LIN TRANSPORT
 1890 DES SOURCES BOULEVARD
 POINTE CLAIRE, QC
 CA H9R 5B1
 Contact: Eric Marcelin
 emarcelin@manitoulintransport.com
 T: (514)694-5111
 F: (514)694-9739

Reçu : 16 Oct 2023
Diagnostiqué : 16 Oct 2023
Diagnostiqueur : Wes Davis

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
Test denoted () outside scope of accreditation, (m) method modified, (e) tested at external lab.*
La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.