



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

52929

Composant

Moteur diesel

Fluide

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		WC0857935	WC0836006	---
Date d'échant.		Client Info		12 Oct 2023	31 Aug 2023	---
Âge d la Machine	mls	Client Info		68214	37905	---
Âge de l'huile	mls	Client Info		30984	37905	---
Âge du filtre	mls	Client Info		30984	37905	---
Huile changée		Client Info		Changed	Changed	---
Filtre changé		Client Info		Changed	Changed	---
Statut de l'échant.				NORMAL	NORMAL	---

USURE

Metal levels are typical for a new component breaking in.

Fer	ppm	ASTM D5185(m)	>100	37	74	---
Chrome	ppm	ASTM D5185(m)	>20	4	3	---
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	---
Titane	ppm	ASTM D5185(m)		0	<1	---
Argent	ppm	ASTM D5185(m)	>3	<1	<1	---
Aluminium	ppm	ASTM D5185(m)	>20	33	46	---
Plomb	ppm	ASTM D5185(m)	>40	5	7	---
Cuivre	ppm	ASTM D5185(m)	>330	5	18	---
Étain	ppm	ASTM D5185(m)	>15	2	4	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	11	40	---
Potassium	ppm	ASTM D5185(m)	>20	84	130	---
Essence		WC Method	>5	<1.0	<1.0	---
Glycol		WC Method		NEG	NEG	---
% de suie	%	ASTM D7844*	>3	0.3	0.3	---
Nitration	Abs/cm	ASTM D7624*	>20	8.4	9.7	---
Sulfatation	Abs/.1mm	ASTM D7415*	>30	21.2	24.1	---
Eau émulsifiée	scalar	Visual*	>0.2	NEG	NEG	---

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	4	---
Bore	ppm	ASTM D5185(m)	250	4	34	---
Baryum	ppm	ASTM D5185(m)	10	<1	4	---
Molybdène	ppm	ASTM D5185(m)	100	57	63	---
Manganèse	ppm	ASTM D5185(m)		<1	6	---
Magnésium	ppm	ASTM D5185(m)	450	851	447	---
Calcium	ppm	ASTM D5185(m)	3000	1085	1694	---
Phosphore	ppm	ASTM D5185(m)	1150	918	973	---
Zinc	ppm	ASTM D5185(m)	1350	1138	1165	---
Soufre	ppm	ASTM D5185(m)	4250	2251	2201	---
Oxydation	Abs/.1mm	ASTM D7414*	>25	17.2	19.8	---
Visc 100°C	cSt	ASTM D7279(m)	10.9	11.3	11.6	---

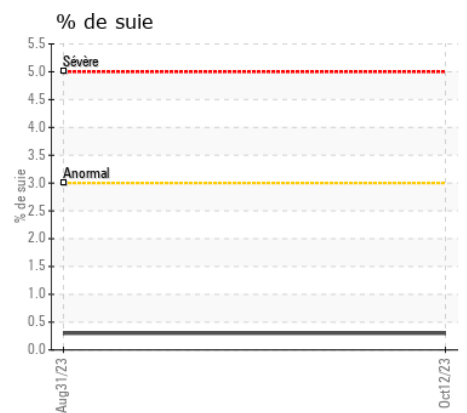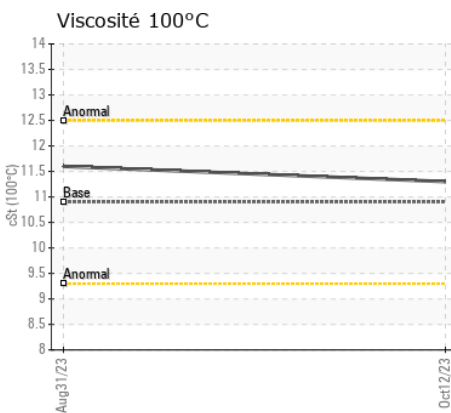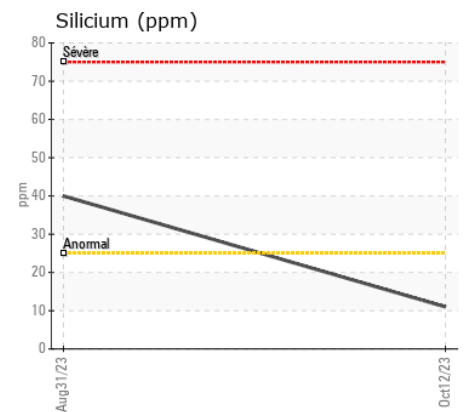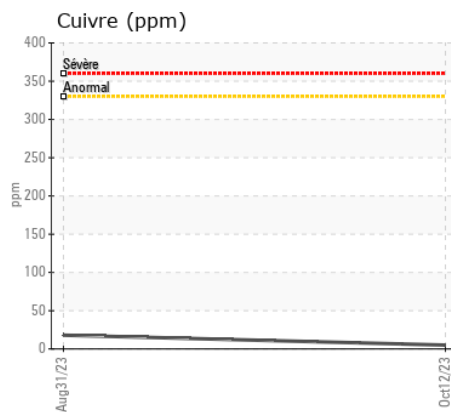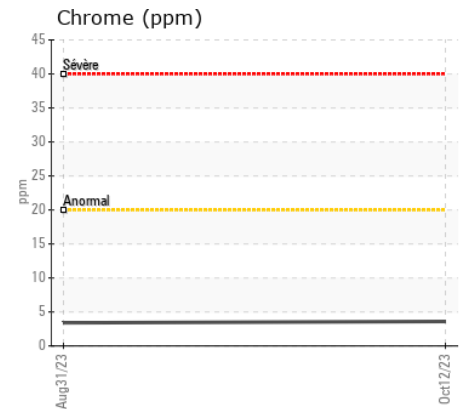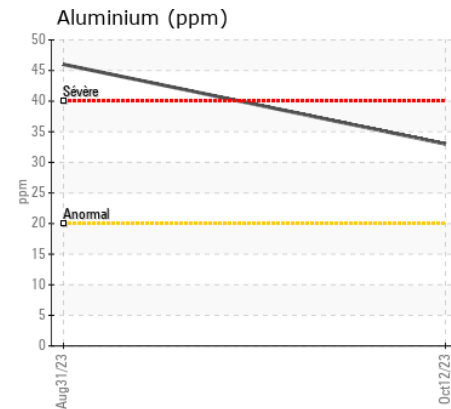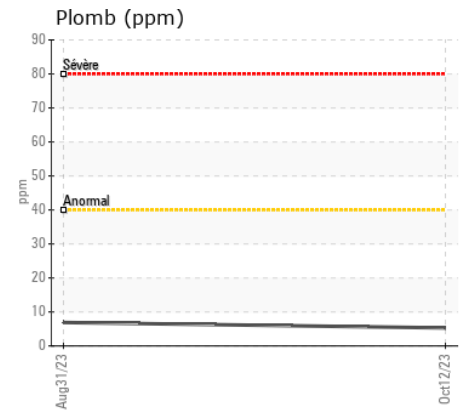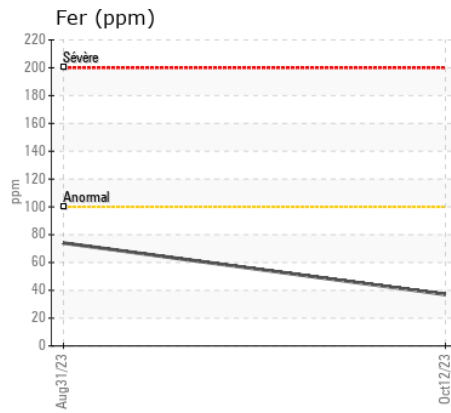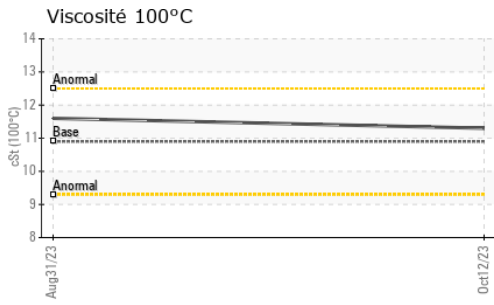

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
N° d'échantillon : WC0857935 **Reçu** : 16 Oct 2023
N° de laboratoire : 02589248 **Diagnostiqué** : 16 Oct 2023
Numéro unique : 5658314 **Diagnostiqueur** : Wes Davis
Analyse : MOB 1

MANITOU LIN TRANSPORT
 1890 DES SOURCES BOULEVARD
 POINTE CLAIRE, QC
 CA H9R 5B1
 Contact: Eric Marcelin
 emarcelin@manitoulintransport.com
 T: (514)694-5111
 F: (514)694-9739

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.