



Identité de la machine

1215

Composant

Transmission (Auto)

Fluide

DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0082294	PC0072206	PC0070909
Date d'échant.		Client Info		15 Oct 2023	06 Jul 2023	01 Mar 2023
Âge d la Machine	kms	Client Info		7607	7123	6649
Âge de l'huile	kms	Client Info		0	0	0
Âge du filtre	kms	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	91	81	72
Chrome	ppm	ASTM D5185(m)	>5	0	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	<1	0	0
Aluminium	ppm	ASTM D5185(m)	>50	23	20	19
Plomb	ppm	ASTM D5185(m)	>50	28	26	27
Cuivre	ppm	ASTM D5185(m)	>225	18	15	13
Étain	ppm	ASTM D5185(m)	>10	4	4	4
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	8	7	7
Potassium	ppm	ASTM D5185(m)	>20	1	2	1
Limon	scalar	Visual*	NONE	VLITE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	.2%	NEG

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	5	5
Bore	ppm	ASTM D5185(m)		65	68	69
Baryum	ppm	ASTM D5185(m)		<1	<1	0
Molybdène	ppm	ASTM D5185(m)		0	<1	<1
Manganèse	ppm	ASTM D5185(m)		<1	1	1
Magnésium	ppm	ASTM D5185(m)		2	2	<1
Calcium	ppm	ASTM D5185(m)		99	102	104
Phosphore	ppm	ASTM D5185(m)		219	229	246
Zinc	ppm	ASTM D5185(m)		23	23	21
Soufre	ppm	ASTM D5185(m)		1045	1018	1101
Visc 40°C	cSt	ASTM D7279(m)	26.0	32.7	32.5	32.5
Visc 100°C	cSt	ASTM D7279(m)	5.5	6.5	6.4	6.4
Indice de viscosité (VI)	Scale	ASTM D2270*	155	157	153	153

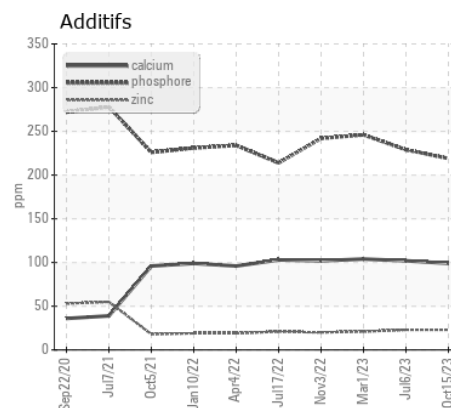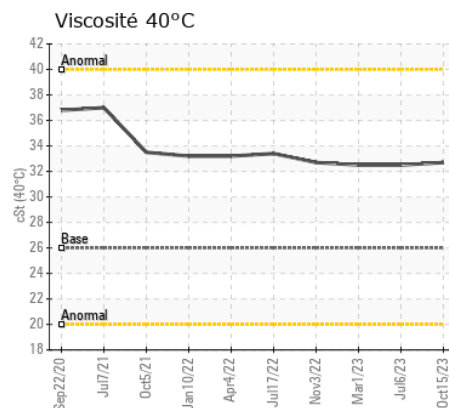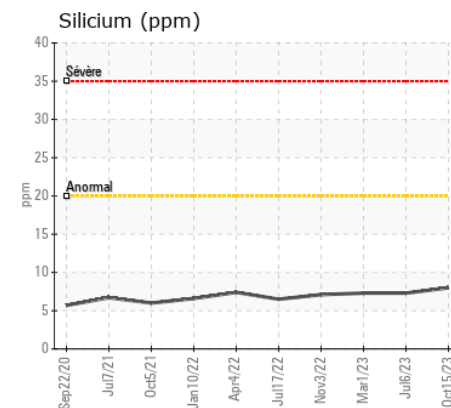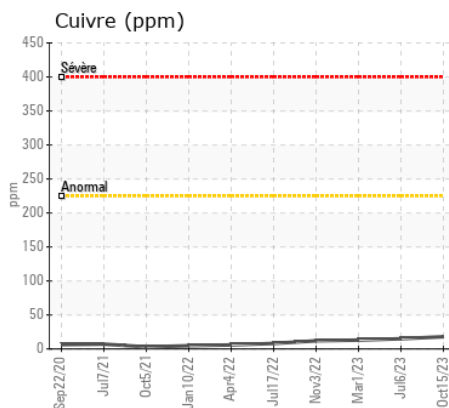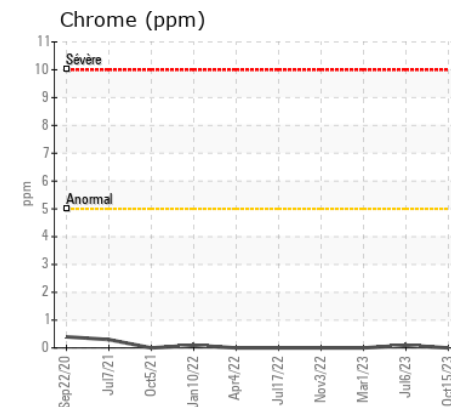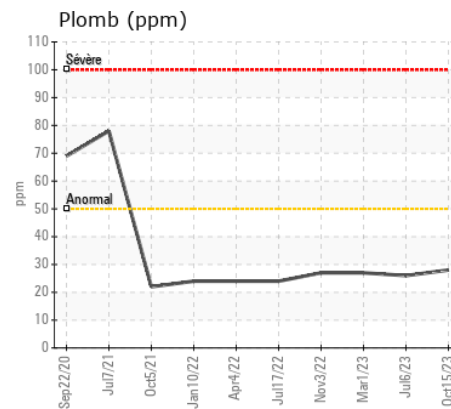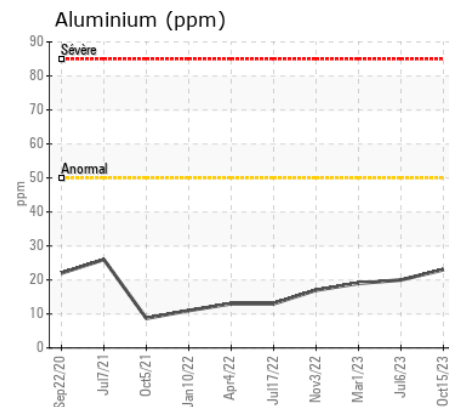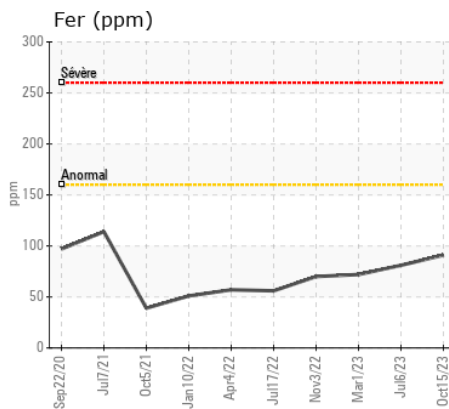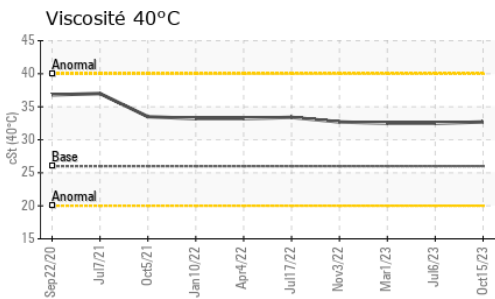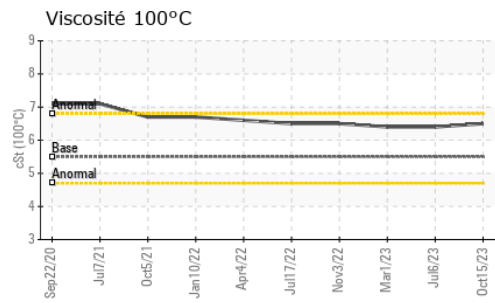

ISO 17025:2017  
Accredited  
Laboratory

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUDVILLE INC.**  
**N° d'échantillon** : PC0082294 **Reçu** : 16 Oct 2023 270 RUE BRUNET  
**N° de laboratoire** : 02589355 **Diagnostiqué** : 16 Oct 2023 MONT ST-HILAIRE, QC  
**Numéro unique** : 5658421 **Diagnostiqueur** : Wes Davis CA J3H 0M6  
**Analyse** : MOB 1 ( Additional Tests: KV100, VI ) Contact: Martin Trudel

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

mtrudel@michaudville.com

T:

F: