



Secteur
MICHAUDVILLE
Identité de la machine
1201

Composant
Transmission (Auto)
Fluide
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0071575	PC0072103	PC0070785
Date d'échant.		Client Info		17 Oct 2023	04 Jun 2023	21 Feb 2023
Âge d la Machine	hrs	Client Info		12194	11745	11280
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	80	69	63
Chrome	ppm	ASTM D5185(m)	>5	<1	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	0	0
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	<1	0	0
Aluminium	ppm	ASTM D5185(m)	>50	20	18	16
Plomb	ppm	ASTM D5185(m)	>50	12	12	11
Cuivre	ppm	ASTM D5185(m)	>225	17	15	15
Étain	ppm	ASTM D5185(m)	>10	3	3	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	6	6	6
Potassium	ppm	ASTM D5185(m)	>20	<1	3	<1
Limon	scalar	Visual*	NONE	VLITE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	.2%	NEG

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		6	6	5
Bore	ppm	ASTM D5185(m)		80	74	81
Baryum	ppm	ASTM D5185(m)		<1	0	0
Molybdène	ppm	ASTM D5185(m)		0	0	0
Manganèse	ppm	ASTM D5185(m)		<1	<1	<1
Magnésium	ppm	ASTM D5185(m)		1	2	2
Calcium	ppm	ASTM D5185(m)		256	254	269
Phosphore	ppm	ASTM D5185(m)		277	298	312
Zinc	ppm	ASTM D5185(m)		84	78	81
Soufre	ppm	ASTM D5185(m)		885	901	956
Visc 40°C	cSt	ASTM D7279(m)	26.0	34.1	34.5	34.3
Visc 100°C	cSt	ASTM D7279(m)	5.5	6.7	6.7	6.8
Indice de viscosité (VI)	Scale	ASTM D2270*	155	157	154	161

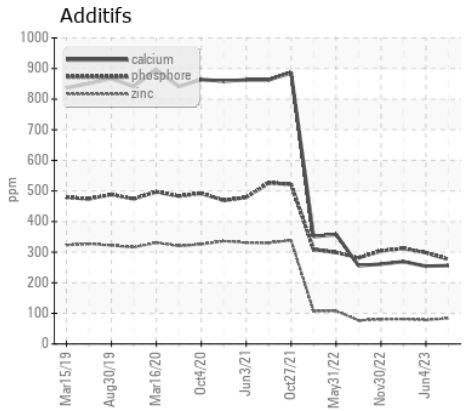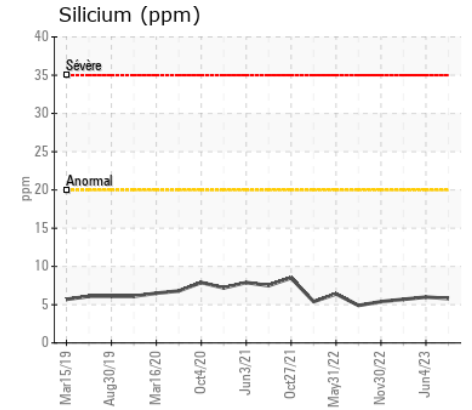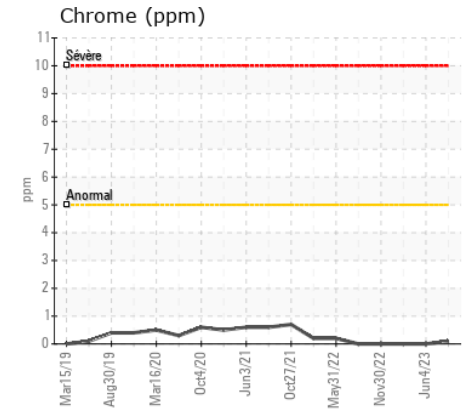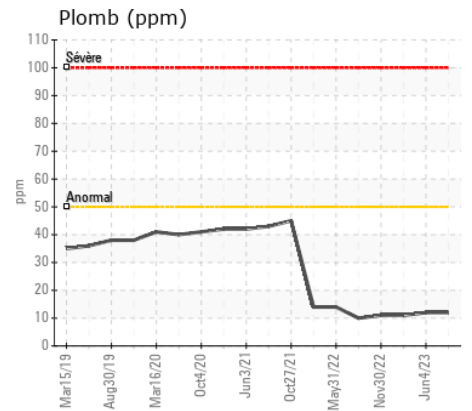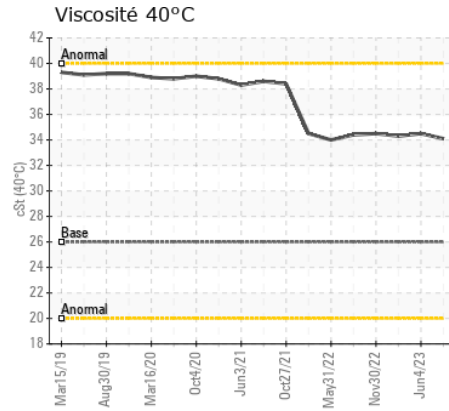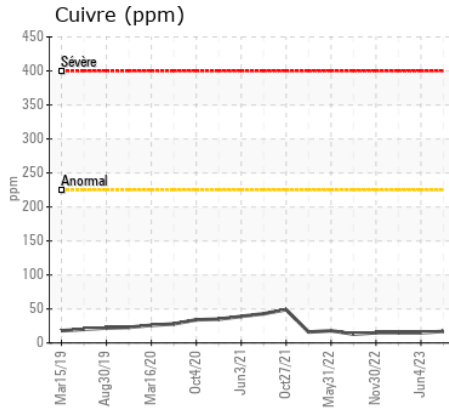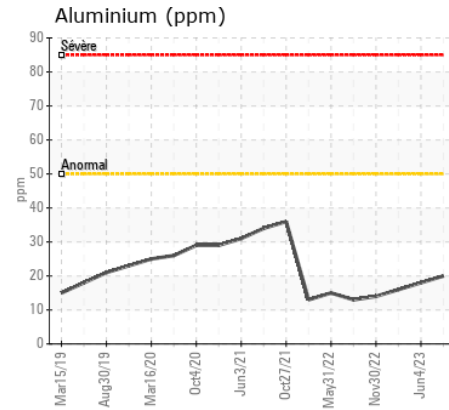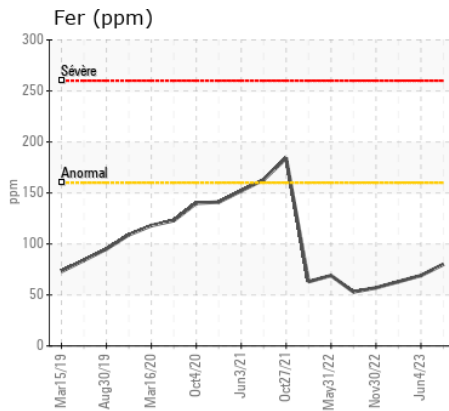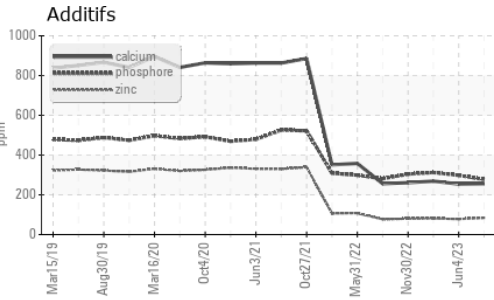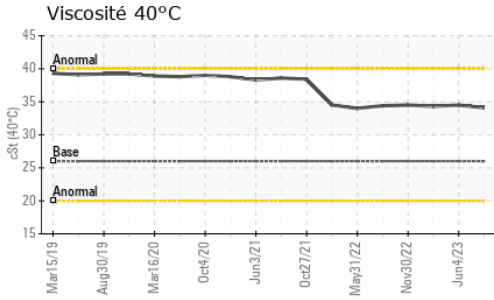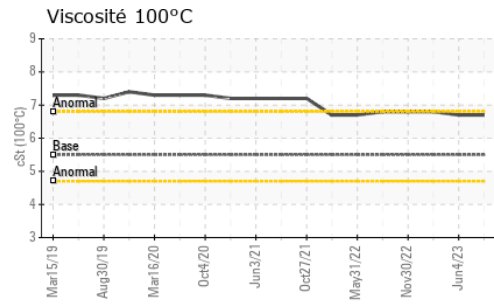

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.
N° d'échantillon : PC0071575 **Reçu** : 18 Oct 2023
N° de laboratoire : 02590099 **Diagnostiqué** : 18 Oct 2023
Numéro unique : 5659165 **Diagnostiqueur** : Wes Davis
Analyse : MOB 1 (Additional Tests: KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET
MONT ST-HILAIRE, QC
CA J3H 0M6
Contact: Martin Trudel
mtrudel@michaudville.com

T:
F: