



# RAPPORT D'ANALYSE D'HUILE

USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Identité de la machine  
**17DO3A#01**

Composant  
**Moteur diesel Babord**

Fluide  
**SAE 5W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>WC0811245</b>	---	---
Date d'échant.		Client Info		<b>25 Oct 2023</b>	---	---
Âge d la Machine	hrs	Client Info		<b>0</b>	---	---
Âge de l'huile	hrs	Client Info		<b>0</b>	---	---
Âge du filtre	hrs	Client Info		<b>0</b>	---	---
Huile changée		Client Info		<b>Not Changd</b>	---	---
Filtre changé		Client Info		<b>N/A</b>	---	---
Statut de l'échant.				<b>NORMAL</b>	---	---

## USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>100	<b>6</b>	---	---
Chrome	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Titane	ppm	ASTM D5185(m)		<b>0</b>	---	---
Argent	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	---	---
Aluminium	ppm	ASTM D5185(m)	>20	<b>6</b>	---	---
Plomb	ppm	ASTM D5185(m)	>40	<b>2</b>	---	---
Cuivre	ppm	ASTM D5185(m)	>330	<b>9</b>	---	---
Étain	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	<b>8</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Essence		WC Method	>5	<b>&lt;1.0</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
% de suie	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.1</b>	---	---
Sulfatation	Abs/.1mm	ASTM D7415*	>30	<b>20.8</b>	---	---
Eau émulsifiée	scalar	Visual*	>0.2	<b>NEG</b>	---	---

## ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>3</b>	---	---
Bore	ppm	ASTM D5185(m)		<b>151</b>	---	---
Baryum	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdène	ppm	ASTM D5185(m)		<b>4</b>	---	---
Manganèse	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnésium	ppm	ASTM D5185(m)		<b>131</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1885</b>	---	---
Phosphore	ppm	ASTM D5185(m)		<b>910</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1040</b>	---	---
Soufre	ppm	ASTM D5185(m)		<b>2687</b>	---	---
Oxydation	Abs/.1mm	ASTM D7414*	>25	<b>16.9</b>	---	---
Visc 100°C	cSt	ASTM D7279(m)		<b>14.8</b>	---	---

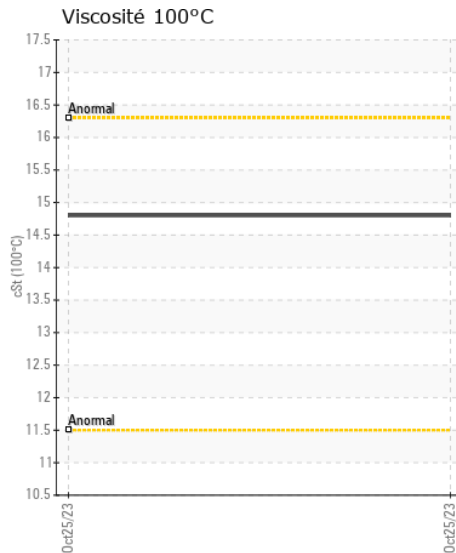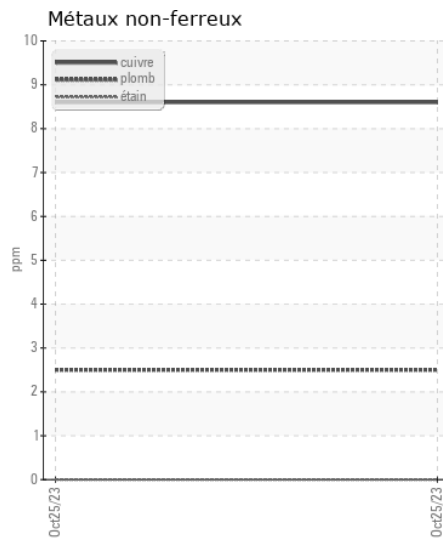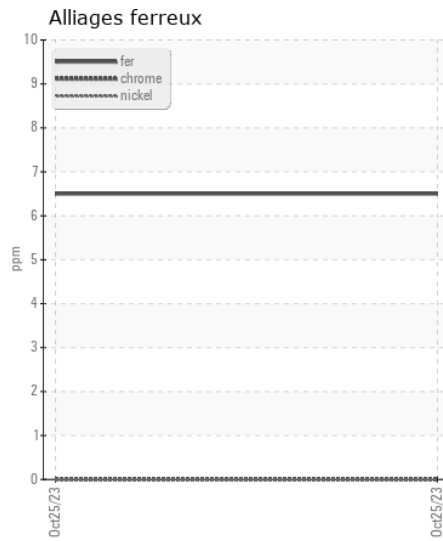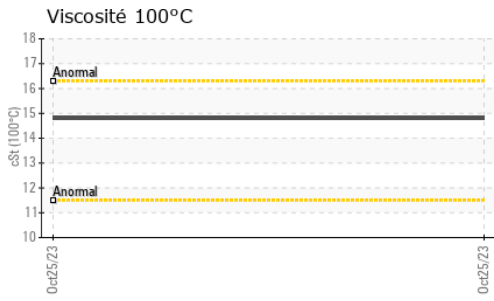

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**N° d'échantillon** : WC0811245  
**N° de laboratoire** : 02593142  
**Numéro unique** : 5670221  
**Analyse** : MAR 5 ( Additional Tests: FT-IR, ICP, KV100, Spat )

**Canadian Coast Guard**  
 CCGS Amundsen, 101 Boul. Champlain  
 Quebec, QC  
 CA G1K 7Y7  
 Contact: Jean-Pierre Munger  
 Jean-Pierre.Munger@dfo-mpo.gc.ca  
 T: (418)648-5440  
 F:

Pour discuter cette rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.