



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

1515

Composant

Transmission (Auto)

Fluide

NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0082531	PC0078455	PC0072123
Date d'échant.		Client Info		21 Nov 2023	28 Aug 2023	24 May 2023
Âge d la Machine	hrs	Client Info		4993	4463	3949
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>160	141	127	117
Chrome	ppm	ASTM D5185(m)	>5	2	2	2
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	<1	<1
Argent	ppm	ASTM D5185(m)	>5	<1	0	0
Aluminium	ppm	ASTM D5185(m)	>50	21	21	20
Plomb	ppm	ASTM D5185(m)	>50	2	1	1
Cuivre	ppm	ASTM D5185(m)	>225	55	53	50
Étain	ppm	ASTM D5185(m)	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicium	ppm	ASTM D5185(m)	>20	5	5	5
Potassium	ppm	ASTM D5185(m)	>20	1	1	2
L'eau		WC Method	>0.1	NEG	NEG	NEG
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	LIGHT	VLITE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	VLITE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	5	6
Bore	ppm	ASTM D5185(m)		191	201	206
Baryum	ppm	ASTM D5185(m)		3	3	3
Molybdène	ppm	ASTM D5185(m)		<1	1	1
Manganèse	ppm	ASTM D5185(m)		14	13	13
Magnésium	ppm	ASTM D5185(m)		4	4	4
Calcium	ppm	ASTM D5185(m)		62	63	65
Phosphore	ppm	ASTM D5185(m)		845	898	951
Zinc	ppm	ASTM D5185(m)		23	24	22
Soufre	ppm	ASTM D5185(m)		349	361	391
Visc 40°C	cSt	ASTM D7279(m)		94.0	93.5	94.5
Visc 100°C	cSt	ASTM D7279(m)		13.8	13.8	13.9
Indice de viscosité (VI)	Scale	ASTM D2270*		149	150	149

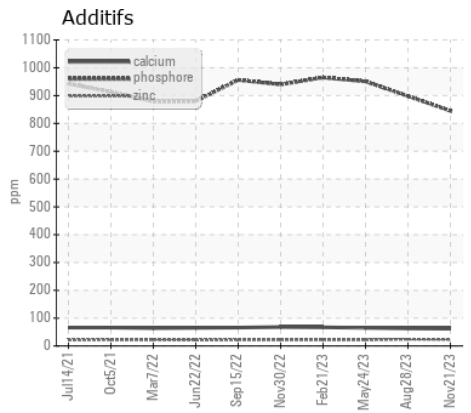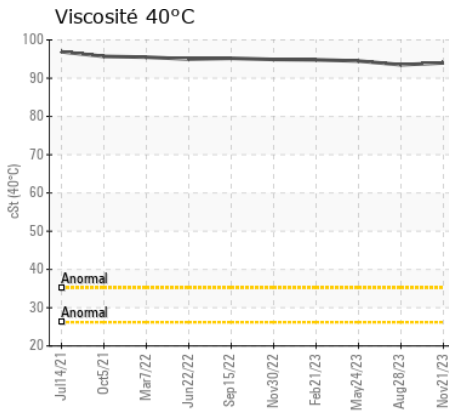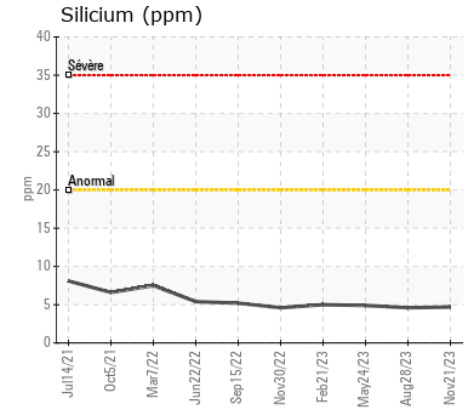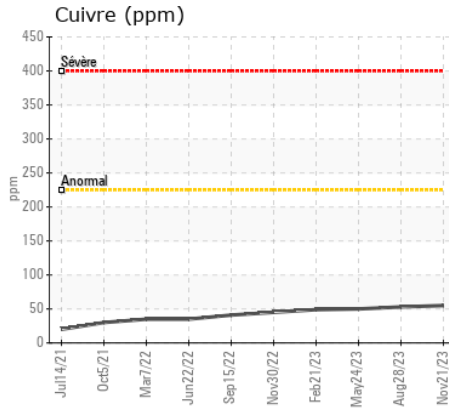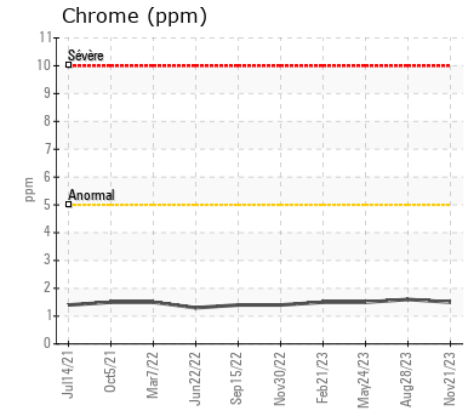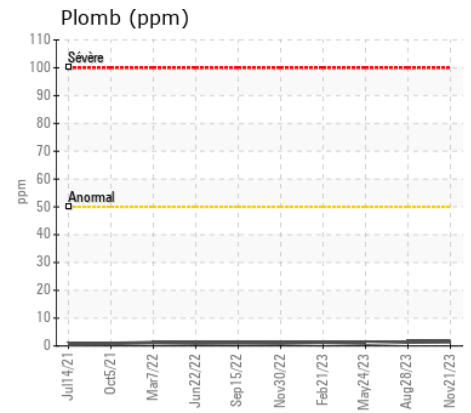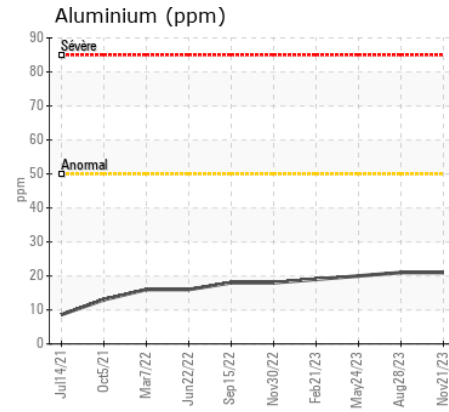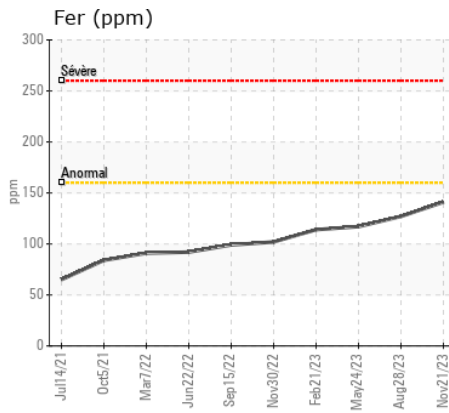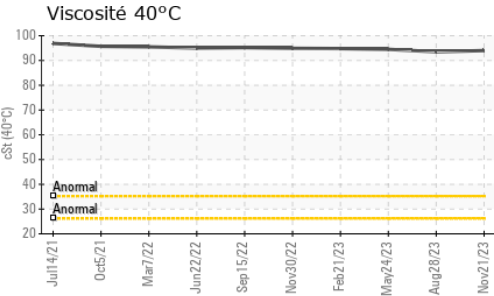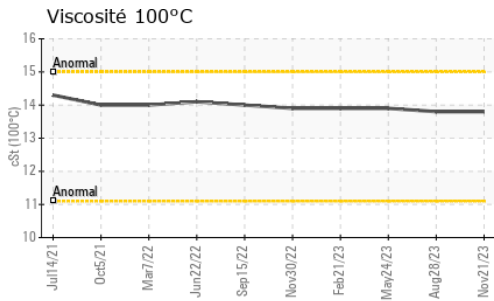

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUDVILLE INC.
N° d'échantillon : PC0082531 **Reçu** : 22 Nov 2023
N° de laboratoire : 02598201 **Diagnostiqué** : 22 Nov 2023
Numéro unique : 5683281 **Diagnostiqueur** : Kevin Marson
Analyse : MOB 1 (Additional Tests: KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

T:
F: