



# RAPPORT D'ANALYSE D'HUILE

|                |               |
|----------------|---------------|
| USURE          | <b>NORMAL</b> |
| CONTAMINATION  | <b>NORMAL</b> |
| ÉTAT DU FLUIDE | <b>NORMAL</b> |

Secteur  
**MICHAUDVILLE**

Identité de la machine

**1587**

Composant

**Moteur diesel**

Fluide

**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test                | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|---------------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Numéro d'échant.    |     | Client Info |           | <b>PC0083888</b>   | PC0077369   | PC0070866   |
| Date d'échant.      |     | Client Info |           | <b>03 Dec 2023</b> | 25 Jul 2023 | 16 Apr 2023 |
| Âge d la Machine    | hrs | Client Info |           | <b>15850</b>       | 15332       | 14823       |
| Âge de l'huile      | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Âge du filtre       | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Huile changée       |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Filtre changé       |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Statut de l'échant. |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## USURE

All component wear rates are normal.

|           |     |               |      |              |    |    |
|-----------|-----|---------------|------|--------------|----|----|
| Fer       | ppm | ASTM D5185(m) | >100 | <b>13</b>    | 17 | 6  |
| Chrome    | ppm | ASTM D5185(m) | >20  | <b>&lt;1</b> | <1 | 0  |
| Nickel    | ppm | ASTM D5185(m) | >4   | <b>0</b>     | 0  | <1 |
| Titane    | ppm | ASTM D5185(m) |      | <b>0</b>     | 0  | 0  |
| Argent    | ppm | ASTM D5185(m) | >3   | <b>&lt;1</b> | 0  | 0  |
| Aluminium | ppm | ASTM D5185(m) | >20  | <b>6</b>     | 8  | 1  |
| Plomb     | ppm | ASTM D5185(m) | >40  | <b>2</b>     | 7  | <1 |
| Cuivre    | ppm | ASTM D5185(m) | >330 | <b>&lt;1</b> | 2  | <1 |
| Étain     | ppm | ASTM D5185(m) | >15  | <b>0</b>     | <1 | <1 |
| Vanadium  | ppm | ASTM D5185(m) |      | <b>0</b>     | 0  | 0  |

## CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

|                |          |               |      |                |      |      |
|----------------|----------|---------------|------|----------------|------|------|
| Silicium       | ppm      | ASTM D5185(m) | >25  | <b>5</b>       | 8    | 5    |
| Potassium      | ppm      | ASTM D5185(m) | >20  | <b>16</b>      | 23   | 0    |
| Essence        |          | WC Method     | >5   | <b>&lt;1.0</b> | <1.0 | <1.0 |
| L'eau          |          | WC Method     | >0.2 | <b>NEG</b>     | NEG  | NEG  |
| Glycol         |          | WC Method     |      | <b>NEG</b>     | NEG  | NEG  |
| % de suie      | %        | ASTM D7844*   | >3   | <b>0</b>       | 0    | 0    |
| Nitration      | Abs/cm   | ASTM D7624*   | >20  | <b>9.1</b>     | 10.4 | 5.6  |
| Sulfatation    | Abs/.1mm | ASTM D7415*   | >30  | <b>21.5</b>    | 22.6 | 18.8 |
| Eau émulsifiée | scalar   | Visual*       | >0.2 | <b>NEG</b>     | NEG  | NEG  |

## ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

|                          |          |               |      |              |      |      |
|--------------------------|----------|---------------|------|--------------|------|------|
| Sodium                   | ppm      | ASTM D5185(m) |      | <b>4</b>     | 5    | 2    |
| Bore                     | ppm      | ASTM D5185(m) | 250  | <b>2</b>     | 2    | 2    |
| Baryum                   | ppm      | ASTM D5185(m) | 10   | <b>&lt;1</b> | 0    | 0    |
| Molybdène                | ppm      | ASTM D5185(m) | 100  | <b>59</b>    | 60   | 58   |
| Manganèse                | ppm      | ASTM D5185(m) |      | <b>0</b>     | <1   | <1   |
| Magnésium                | ppm      | ASTM D5185(m) | 450  | <b>976</b>   | 1025 | 929  |
| Calcium                  | ppm      | ASTM D5185(m) | 3000 | <b>1140</b>  | 1144 | 1102 |
| Phosphore                | ppm      | ASTM D5185(m) | 1150 | <b>1017</b>  | 1105 | 1078 |
| Zinc                     | ppm      | ASTM D5185(m) | 1350 | <b>1241</b>  | 1261 | 1158 |
| Soufre                   | ppm      | ASTM D5185(m) | 4250 | <b>2511</b>  | 2533 | 2681 |
| Oxydation                | Abs/.1mm | ASTM D7414*   | >25  | <b>18.1</b>  | 19.7 | 13.6 |
| Visc 40°C                | cSt      | ASTM D7279(m) | 73   | <b>91.3</b>  | 94.0 | 97.5 |
| Visc 100°C               | cSt      | ASTM D7279(m) | 10.9 | <b>13.5</b>  | 13.7 | 14.3 |
| Indice de viscosité (VI) | Scale    | ASTM D2270*   | 138  | <b>149</b>   | 147  | 150  |

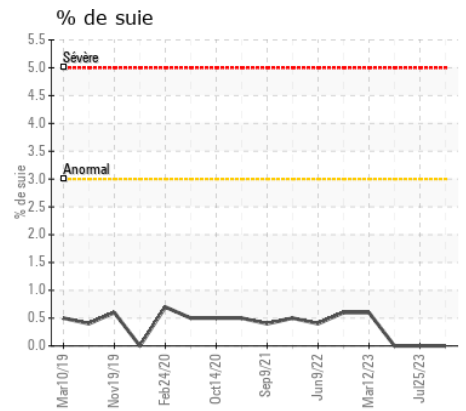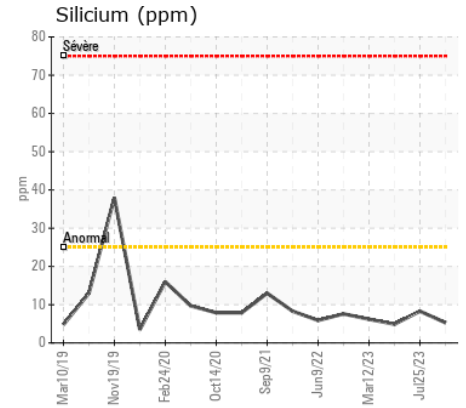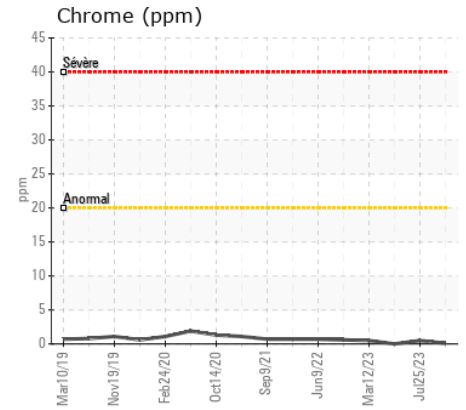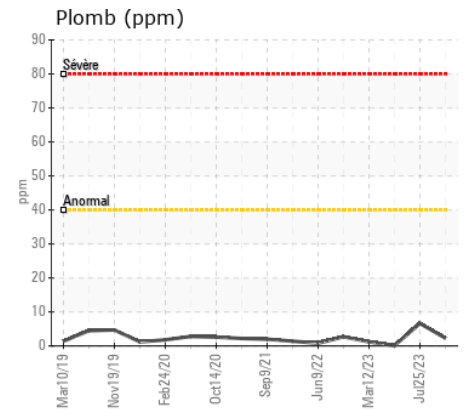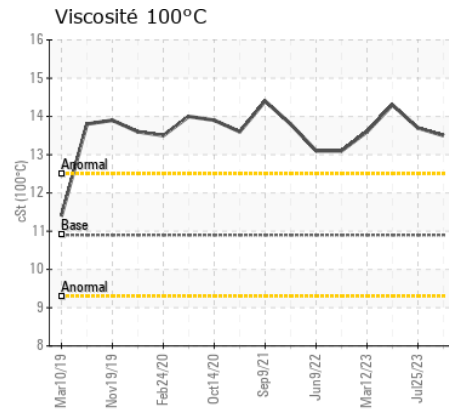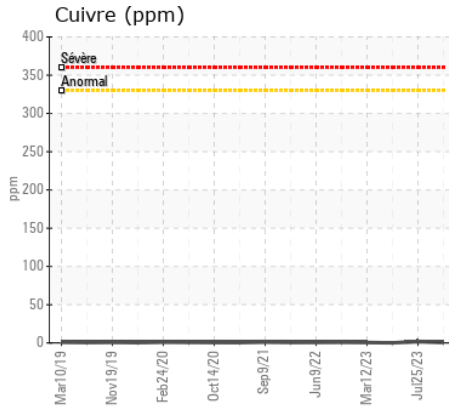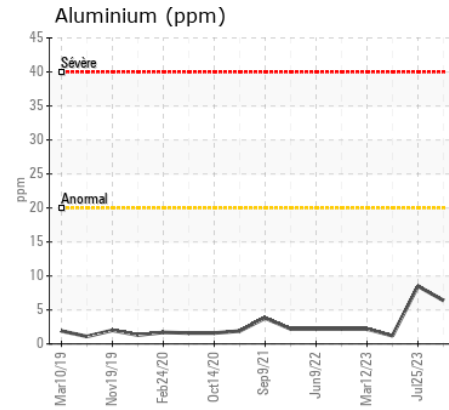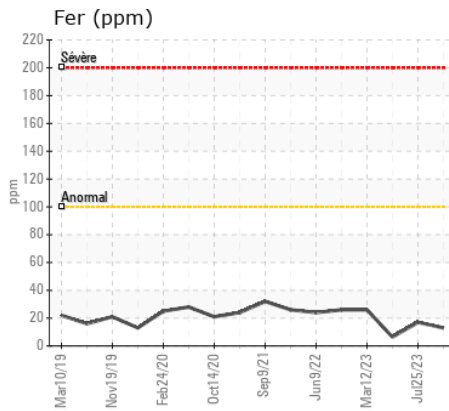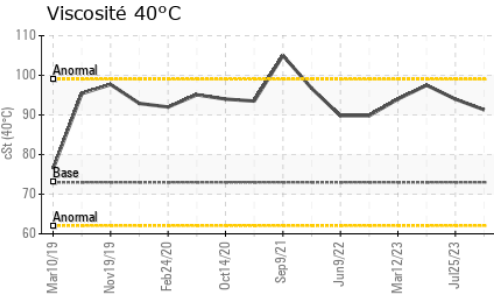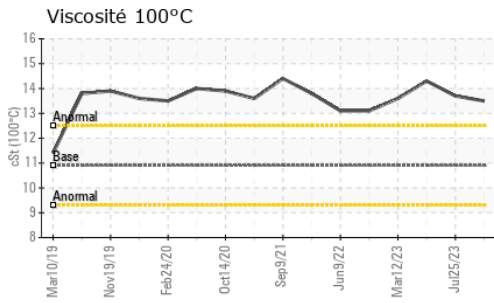

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUVILLE INC.  
**N° d'échantillon** : PC0083888 **Reçu** : 04 Dec 2023  
**N° de laboratoire** : 02600391 **Diagnostiqué** : 04 Dec 2023  
**Numéro unique** : 5685471 **Diagnostiqueur** : Wes Davis  
**Analyse** : MOB 1 ( Additional Tests: KV40, VI )

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET  
 MONT ST-HILAIRE, QC  
 CA J3H 0M6  
 Contact: Martin Trudel  
 mtrudel@michaudville.com  
 T:  
 F: