



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

4525

Composant

Composant inconnu Avant

Fluid

NOT GIVEN (--- GAL)

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

USURE

Component wear rates appear to be normal (unconfirmed).











CONTAMINATION

There is no indication of any contamination in the sample.

ÉTAT DU FLUIDE

The condition of the sample is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0075910	PC0060232	---
Date d'échant.		Client Info		26 Dec 2023	12 Apr 2022	---
Âge d la Machine	hrs	Client Info		6936	6572	---
Âge de l'huile	hrs	Client Info		0	0	---
Âge du filtre	hrs	Client Info		0	0	---
Huile changée		Client Info		N/A	N/A	---
Filtre changé		Client Info		N/A	N/A	---
Statut de l'échant.				NORMAL	NORMAL	---
Fer	ppm	ASTM D5185(m)		66	141	---
Chrome	ppm	ASTM D5185(m)		1	4	---
Nickel	ppm	ASTM D5185(m)		<1	<1	---
Titane	ppm	ASTM D5185(m)		0	<1	---
Argent	ppm	ASTM D5185(m)		0	0	---
Aluminium	ppm	ASTM D5185(m)		2	5	---
Plomb	ppm	ASTM D5185(m)		0	<1	---
Cuivre	ppm	ASTM D5185(m)		4	5	---
Étain	ppm	ASTM D5185(m)		0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Métal blanc	scalar	Visual*	NONE	VLITE	LIGHT	---
Bronze	scalar	Visual*	NONE	NONE	NONE	---
Silicium	ppm	ASTM D5185(m)		12	27	---
Potassium	ppm	ASTM D5185(m)	>20	2	3	---
L'eau		WC Method		NEG	NEG	---
Limon	scalar	Visual*	NONE	NONE	VLITE	---
Débris	scalar	Visual*	NONE	NONE	NONE	---
Saleté	scalar	Visual*	NONE	NONE	NONE	---
Apparence	scalar	Visual*	NORML	NORML	NORML	---
Odeur	scalar	Visual*	NORML	NORML	NORML	---
Eau émulsifiée	scalar	Visual*		NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		5	7	---
Bore	ppm	ASTM D5185(m)		73	72	---
Baryum	ppm	ASTM D5185(m)		0	0	---
Molybdène	ppm	ASTM D5185(m)		8	4	---
Manganèse	ppm	ASTM D5185(m)		<1	2	---
Magnésium	ppm	ASTM D5185(m)		130	66	---
Calcium	ppm	ASTM D5185(m)		2961	3289	---
Phosphore	ppm	ASTM D5185(m)		1033	1108	---
Zinc	ppm	ASTM D5185(m)		1265	1338	---
Soufre	ppm	ASTM D5185(m)		2742	3039	---
Visc 40°C	cSt	ASTM D7279(m)		51.9	61.5	---
Visc 100°C	cSt	ASTM D7279(m)		8.5	8.5	---
Indice de viscosité (VI)	Scale	ASTM D2270*		139	109	---

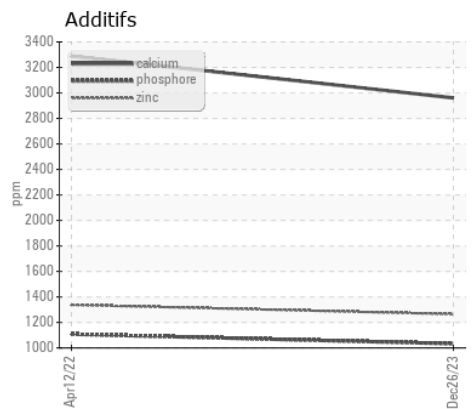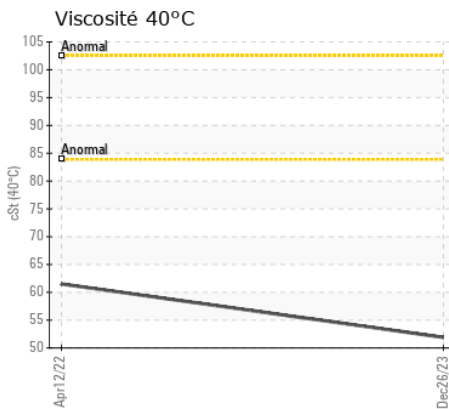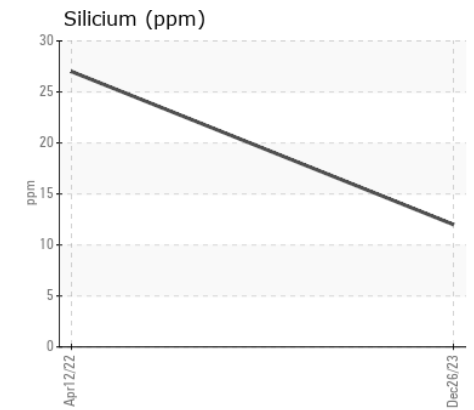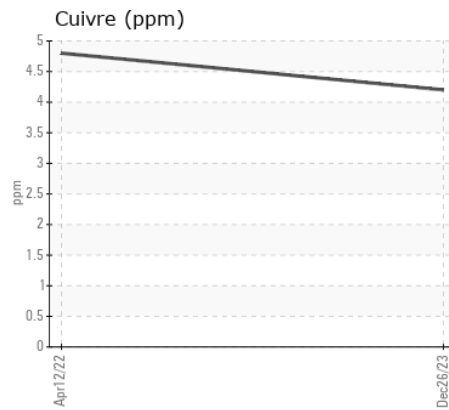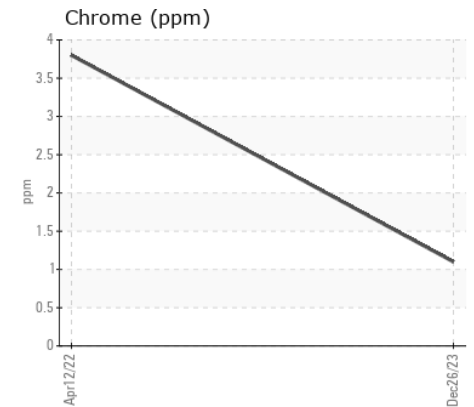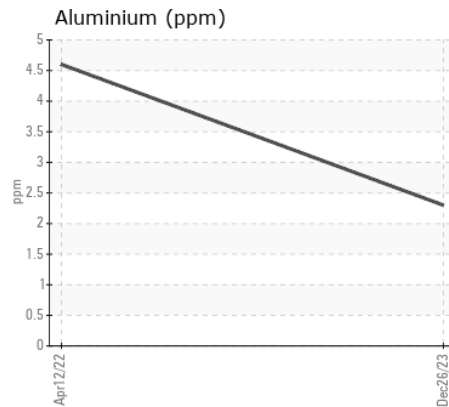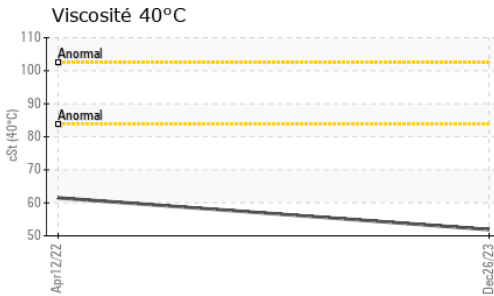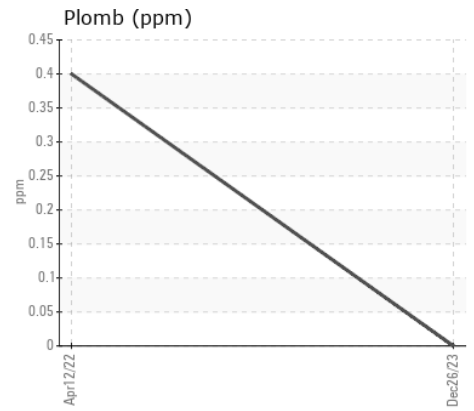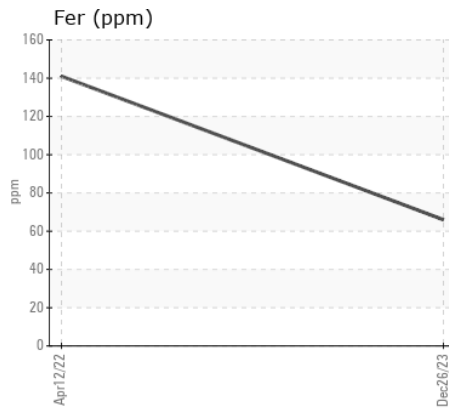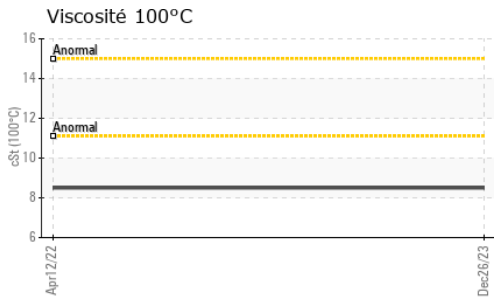

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LES ENTREPRISES MICHAUDVILLE INC.
N° d'échantillon : PC0075910 **Reçu** : 27 Dec 2023
N° de laboratoire : 02605446 **Diagnostiqué** : 28 Dec 2023
Numéro unique : 5698531 **Diagnostiqueur** : Kevin Marson
Analyse : MOB 1 (Additional Tests: KV100, VI)

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

T:
F: