



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

425

Composant

Moteur diesel

Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		WC0894313	WC0874986	WC0833135
Date d'échant.		Client Info		19 Jan 2024	30 Nov 2023	26 May 2023
Âge d la Machine	kms	Client Info		588163	588163	570029
Âge de l'huile	kms	Client Info		0	18134	0
Âge du filtre	kms	Client Info		0	18134	0
Huile changée		Client Info		Changed	Changed	Changed
Filtre changé		Client Info		Changed	Changed	Changed
Statut de l'échant.				NORMAL	ATTENTION	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>65	16	43	48
Chrome	ppm	ASTM D5185(m)	>5	<1	1	<1
Nickel	ppm	ASTM D5185(m)	>3	<1	<1	0
Titane	ppm	ASTM D5185(m)	>5	0	0	<1
Argent	ppm	ASTM D5185(m)	>2	<1	<1	<1
Aluminium	ppm	ASTM D5185(m)	>35	3	9	9
Plomb	ppm	ASTM D5185(m)	>10	0	<1	0
Cuivre	ppm	ASTM D5185(m)	>180	1	4	2
Étain	ppm	ASTM D5185(m)	>8	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












Test for glycol is negative. There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>15	5	7	8
Potassium	ppm	ASTM D5185(m)	>20	14	46	35
Essence		WC Method	>3.0	<1.0	<1.0	1.2
L'eau		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		0.0	0.0	0.0
% de suie	%	ASTM D7844*	>3	0	0.3	0.1
Nitration	Abs/cm	ASTM D7624*	>20	5.8	9.7	9.0
Sulfatation	Abs/.1mm	ASTM D7415*	>30	18.3	21.2	20.2
Eau émulsifiée	scalar	Visual*	>0.2	NEG	NEG	NEG

ÉTAT DU FLUIDE

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		98	▲ 319	184
Bore	ppm	ASTM D5185(m)	2	7	28	49
Baryum	ppm	ASTM D5185(m)	0	0	<1	0
Molybdène	ppm	ASTM D5185(m)	50	64	84	75
Manganèse	ppm	ASTM D5185(m)	0	0	0	<1
Magnésium	ppm	ASTM D5185(m)	950	971	1061	1084
Calcium	ppm	ASTM D5185(m)	1050	1008	833	857
Phosphore	ppm	ASTM D5185(m)	995	1018	980	1084
Zinc	ppm	ASTM D5185(m)	1180	1157	1180	1178
Soufre	ppm	ASTM D5185(m)	2600	2832	2726	2868
Oxydation	Abs/.1mm	ASTM D7414*	>25	14.2	18.7	18.2
Indice d'alcalinité	mg KOH/g	ASTM D2896*		9.96	8.23	11.84
Visc 100°C	cSt	ASTM D7279(m)	12.00	11.4	12.0	11.8

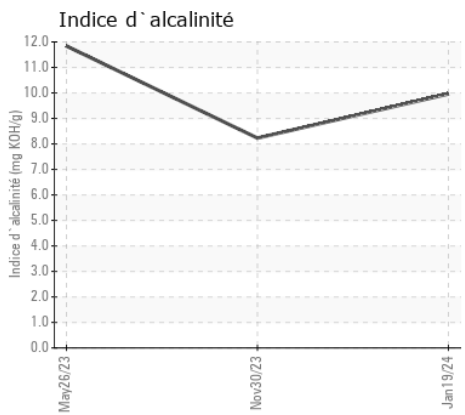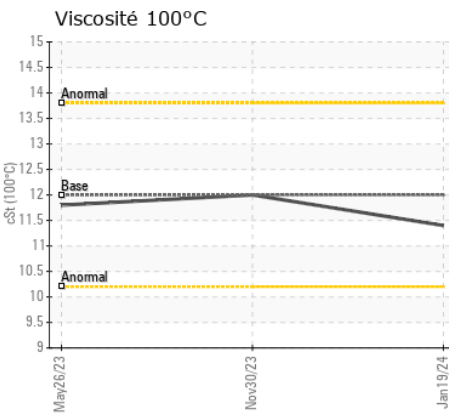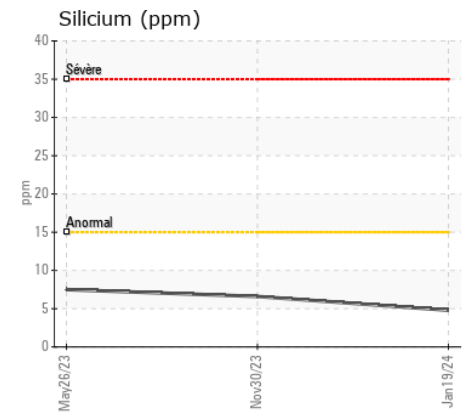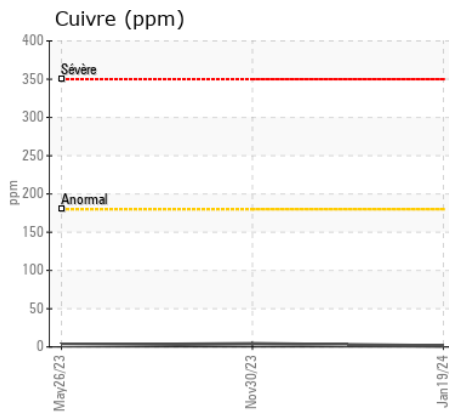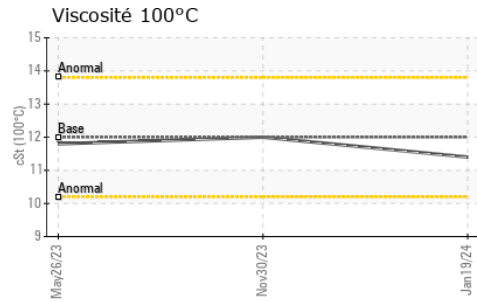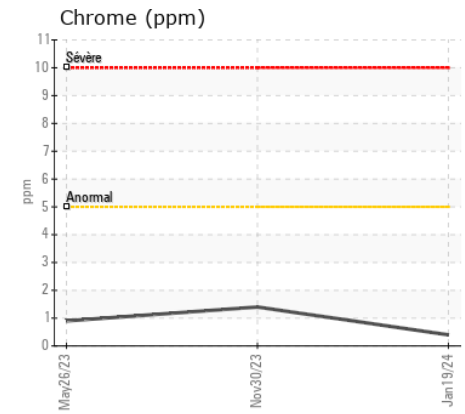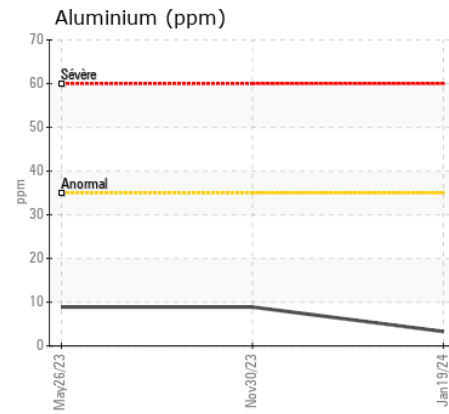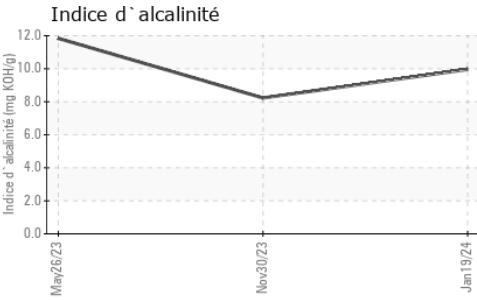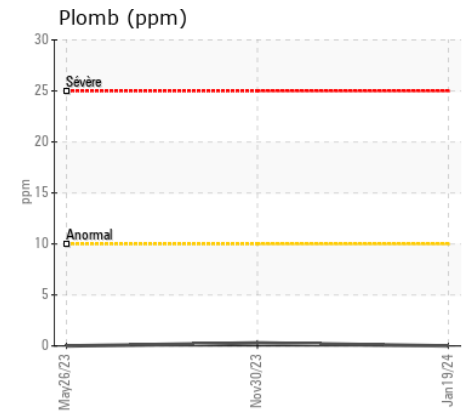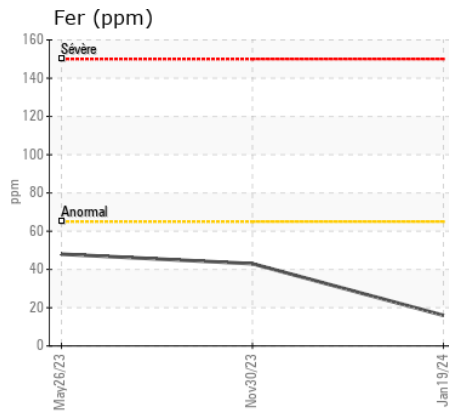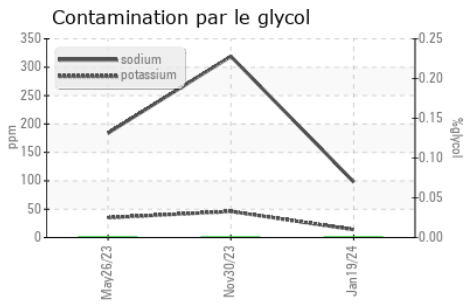

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
N° d'échantillon : WC0894313 **Reçu** : 05 Feb 2024
N° de laboratoire : 02613402 **Diagnostiqué** : 07 Feb 2024
Numéro unique : 5722497 **Diagnostiqueur** : Wes Davis
Analyse : MOB 2 (Additional Tests: Glycol)

Moncton - Transport Laberge
 180 Edinburg Drive, Suite 1A
 Moncton, NB
 CA E1E 2K7
 Contact: Service Manager

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T:
F: