



Identité de la machine

1596

Composant

Moteur diesel

Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0083650	PC0075957	PC0075799
Date d'échant.		Client Info		08 Feb 2024	26 Sep 2023	20 Jun 2023
Âge d la Machine	hrs	Client Info		3923	3457	3008
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>100	14	22	12
Chrome	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminium	ppm	ASTM D5185(m)	>20	4	5	3
Plomb	ppm	ASTM D5185(m)	>40	<1	1	1
Cuivre	ppm	ASTM D5185(m)	>330	<1	1	<1
Étain	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	8	6	9
Potassium	ppm	ASTM D5185(m)	>20	7	15	7
Essence		WC Method	>5	<1.0	<1.0	<1.0
L'eau		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
% de suie	%	ASTM D7844*	>3	0.4	0.5	0.3
Nitration	Abs/cm	ASTM D7624*	>20	7.8	7.8	7.6
Sulfatation	Abs/.1mm	ASTM D7415*	>30	22.1	20.8	19.4
Eau émulsifiée	scalar	Visual*	>0.2	NEG	NEG	NEG

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	4	4
Bore	ppm	ASTM D5185(m)	250	<1	1	2
Baryum	ppm	ASTM D5185(m)	10	0	<1	0
Molybdène	ppm	ASTM D5185(m)	100	54	57	59
Manganèse	ppm	ASTM D5185(m)		0	0	<1
Magnésium	ppm	ASTM D5185(m)	450	874	928	979
Calcium	ppm	ASTM D5185(m)	3000	1263	1155	1080
Phosphore	ppm	ASTM D5185(m)	1150	1010	998	1085
Zinc	ppm	ASTM D5185(m)	1350	1187	1213	1186
Soufre	ppm	ASTM D5185(m)	4250	2795	2604	2600
Oxydation	Abs/.1mm	ASTM D7414*	>25	17.0	15.5	14.8
Visc 40°C	cSt	ASTM D7279(m)	73	82.7	87.6	87.4
Visc 100°C	cSt	ASTM D7279(m)	10.9	12.7	13.3	13.1
Indice de viscosité (VI)	Scale	ASTM D2270*	138	152	152	149

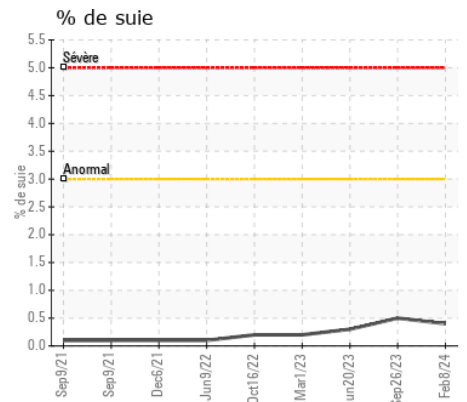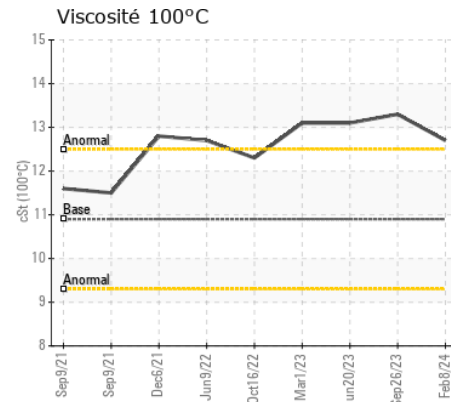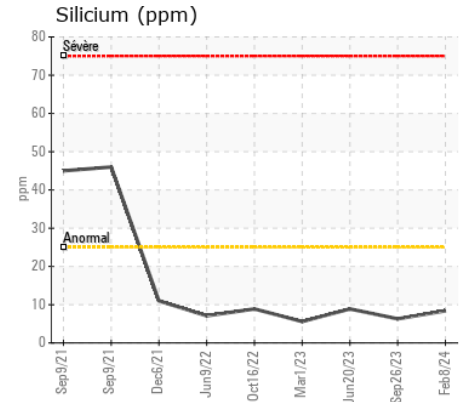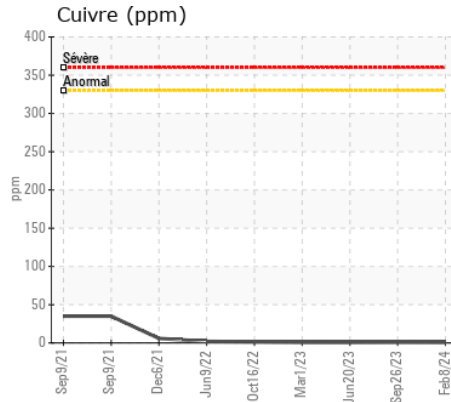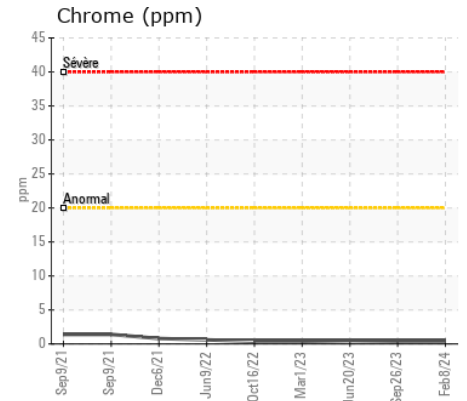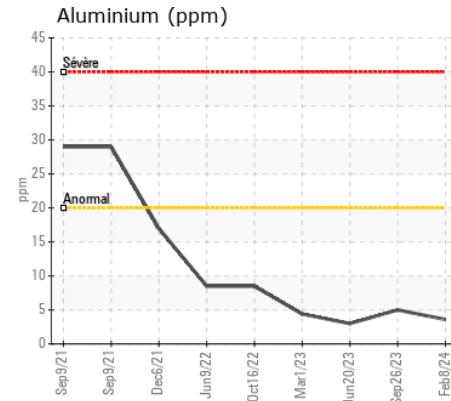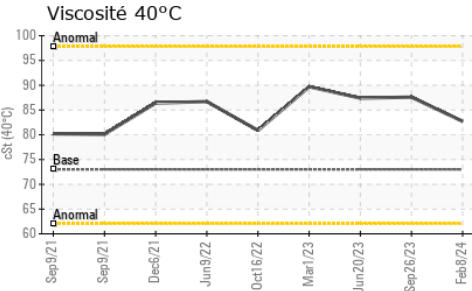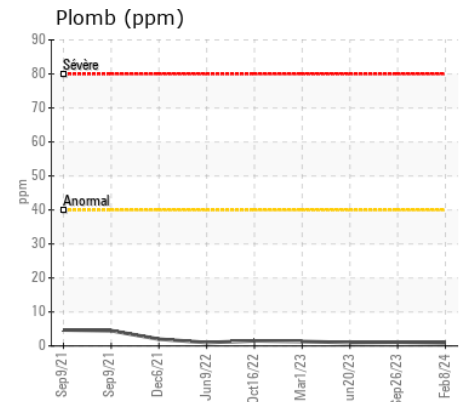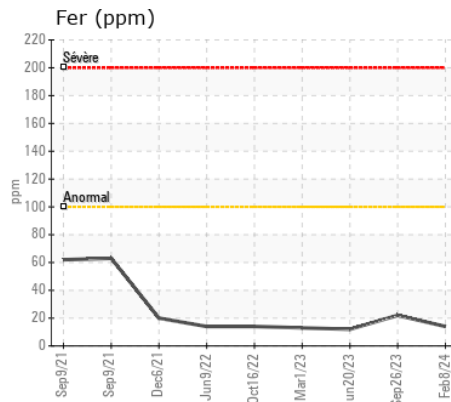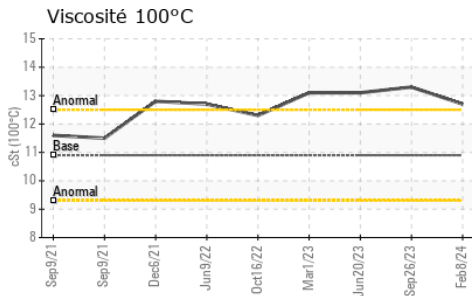

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

N° d'échantillon : PC0083650

N° de laboratoire : 02614553

Numéro unique : 5723648

Analyse : MOB 1 (Additional Tests: KV40, VI)

Reçu : 09 Feb 2024

Tested : 09 Feb 2024

Diagnostiqué : 09 Feb 2024 - Wes Davis

LES ENTREPRISES MICHAUDVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T:

F: