



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

407

Composant

Moteur diesel

Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample
Comment: Probleme with odometer)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		WC0909062	WC0874985	---
Date d'échant.		Client Info		06 Mar 2024	30 Nov 2023	---
Âge d la Machine	kms	Client Info		465270	1072446	---
Âge de l'huile	kms	Client Info		0	0	---
Âge du filtre	kms	Client Info		0	0	---
Huile changée		Client Info		Changed	Changed	---
Filtre changé		Client Info		Changed	Changed	---
Statut de l'échant.				NORMAL	NORMAL	---

USURE

All component wear rates are normal.

Fer	ppm	ASTM D5185(m)	>65	18	30	---
Chrome	ppm	ASTM D5185(m)	>5	3	3	---
Nickel	ppm	ASTM D5185(m)	>3	<1	<1	---
Titane	ppm	ASTM D5185(m)	>5	0	0	---
Argent	ppm	ASTM D5185(m)	>2	0	<1	---
Aluminium	ppm	ASTM D5185(m)	>35	10	18	---
Plomb	ppm	ASTM D5185(m)	>10	0	<1	---
Cuivre	ppm	ASTM D5185(m)	>180	3	5	---
Étain	ppm	ASTM D5185(m)	>8	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>15	5	8	---
Potassium	ppm	ASTM D5185(m)	>20	4	6	---
Essence		WC Method	>3.0	<1.0	<1.0	---
L'eau		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	0.0	---
% de suie	%	ASTM D7844*	>3	0.2	0.1	---
Nitration	Abs/cm	ASTM D7624*	>20	7.7	9.1	---
Sulfatation	Abs/.1mm	ASTM D7415*	>30	19.2	19.2	---
Eau émulsifiée	scalar	Visual*	>0.2	NEG	NEG	---

ÉTAT DU FLUIDE

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		13	14	---
Bore	ppm	ASTM D5185(m)	2	8	61	---
Baryum	ppm	ASTM D5185(m)	0	0	<1	---
Molybdène	ppm	ASTM D5185(m)	50	50	6	---
Manganèse	ppm	ASTM D5185(m)	0	0	<1	---
Magnésium	ppm	ASTM D5185(m)	950	926	691	---
Calcium	ppm	ASTM D5185(m)	1050	1125	1281	---
Phosphore	ppm	ASTM D5185(m)	995	980	684	---
Zinc	ppm	ASTM D5185(m)	1180	1120	788	---
Soufre	ppm	ASTM D5185(m)	2600	2705	2429	---
Oxydation	Abs/.1mm	ASTM D7414*	>25	14.9	14.6	---
Indice d'alcalinité	mg KOH/g	ASTM D2896*		10.12	6.67	---
Visc 100°C	cSt	ASTM D7279(m)	12.00	11.8	11.6	---

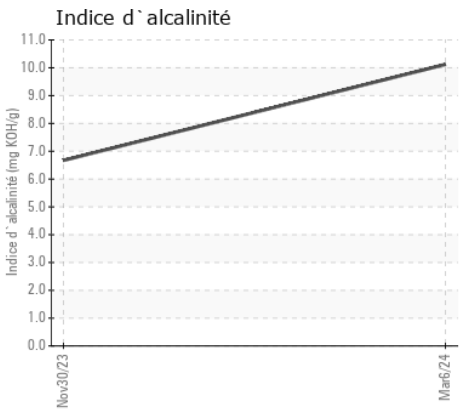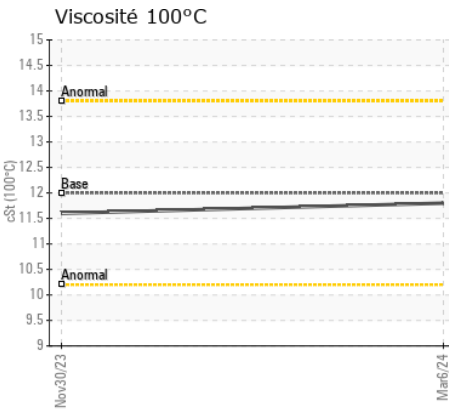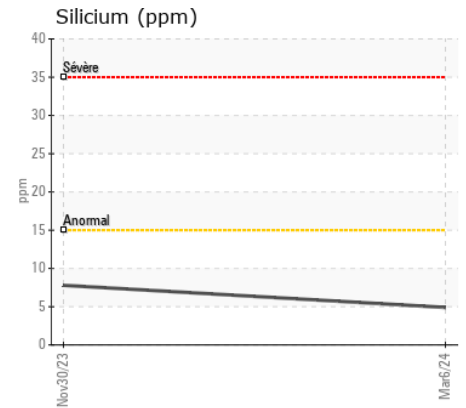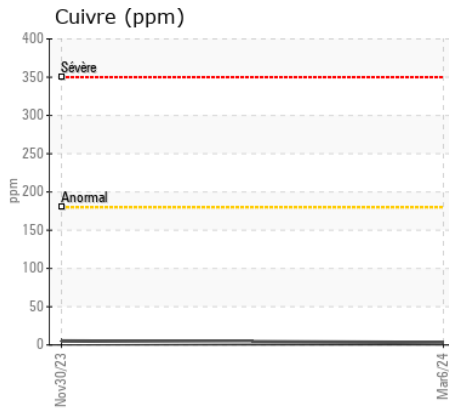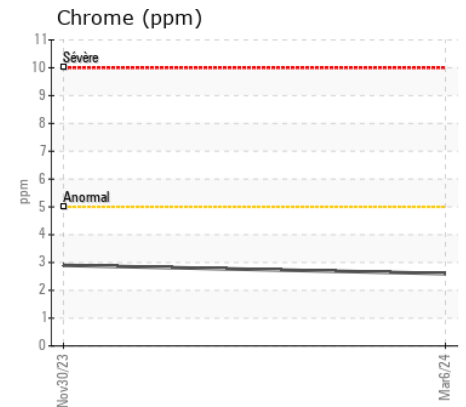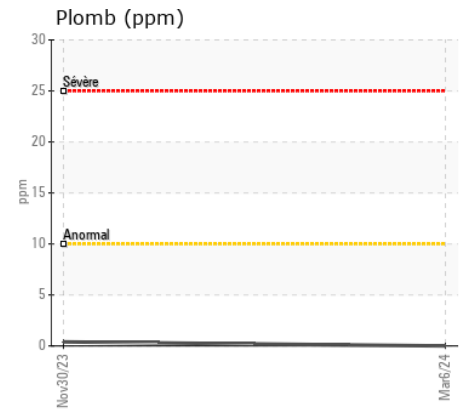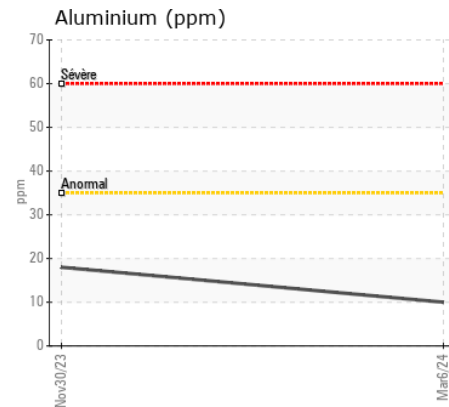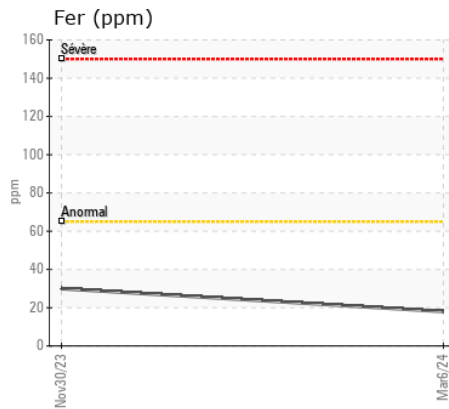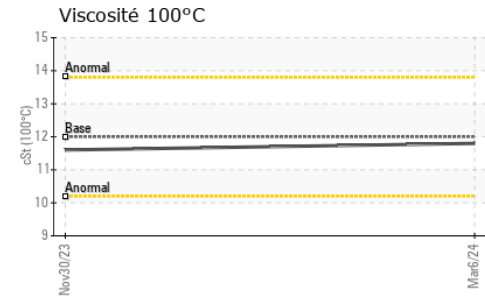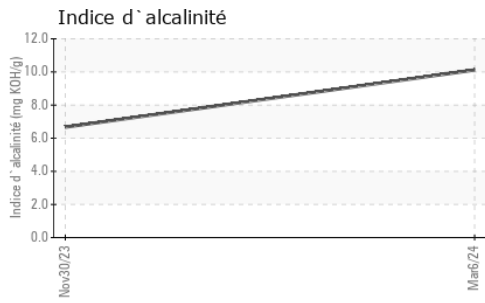

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
N° d'échantillon : WC0909062
N° de laboratoire : 02622219
Numéro unique : 5747338
Analyse : MOB 2
Reçu : 15 Mar 2024
Tested : 15 Mar 2024
Diagnostiqué : 17 Mar 2024 - Kevin Marson

Moncton - Transport Laberge
 180 Edinburg Drive, Suite 1A
 Moncton, NB
 CA E1E 2K7
 Contact: Service Manager

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T:
F: