



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur

MICHAUDVILLE

Identité de la machine

1209

Composant

Transmission (Auto)

Fluid

DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.
Please specify the component make and model with your next sample.

USURE

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0083764	PC0071967	PC0065077
Date d'échant.		Client Info		14 Apr 2024	21 Feb 2023	28 Sep 2022
Âge d la Machine	kms	Client Info		17826	16531	15994
Âge de l'huile	kms	Client Info		0	0	0
Âge du filtre	kms	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL
<hr/>						
Fer	ppm	ASTM D5185(m)	>160	30	147	128
Chrome	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titane	ppm	ASTM D5185(m)		0	<1	0
Argent	ppm	ASTM D5185(m)	>5	0	0	0
Aluminium	ppm	ASTM D5185(m)	>50	6	26	24
Plomb	ppm	ASTM D5185(m)	>50	<1	12	11
Cuivre	ppm	ASTM D5185(m)	>225	6	36	32
Étain	ppm	ASTM D5185(m)	>10	0	2	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE
<hr/>						
Silicium	ppm	ASTM D5185(m)	>20	4	9	8
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
L'eau		WC Method	>0.1	NEG	NEG	NEG
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Saleté	scalar	Visual*	NONE	VLITE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG
<hr/>						
Sodium	ppm	ASTM D5185(m)		2	6	6
Bore	ppm	ASTM D5185(m)		81	146	144
Baryum	ppm	ASTM D5185(m)		0	0	0
Molybdène	ppm	ASTM D5185(m)		0	0	0
Manganèse	ppm	ASTM D5185(m)		<1	1	1
Magnésium	ppm	ASTM D5185(m)		3	<1	<1
Calcium	ppm	ASTM D5185(m)		123	86	85
Phosphore	ppm	ASTM D5185(m)		226	392	383
Zinc	ppm	ASTM D5185(m)		5	4	5
Soufre	ppm	ASTM D5185(m)		1417	1417	1389
Visc 40°C	cSt	ASTM D7279(m)	26.0	34.2	36.0	36.2
Visc 100°C	cSt	ASTM D7279(m)	5.5	6.7	7	7.1
Indice de viscosité (VI)	Scale	ASTM D2270*	155	156	159	162

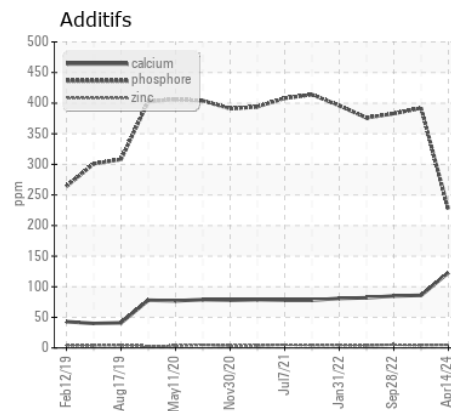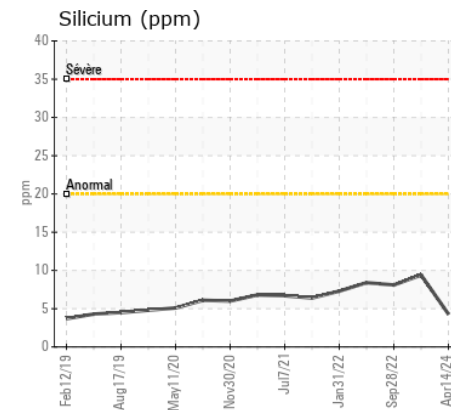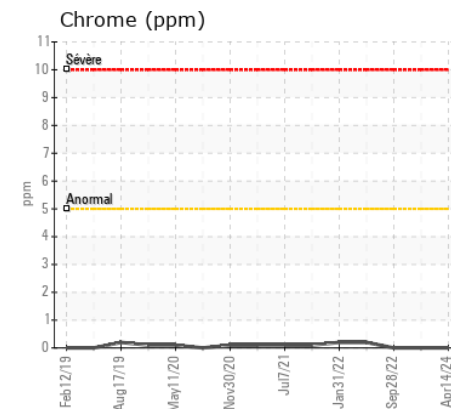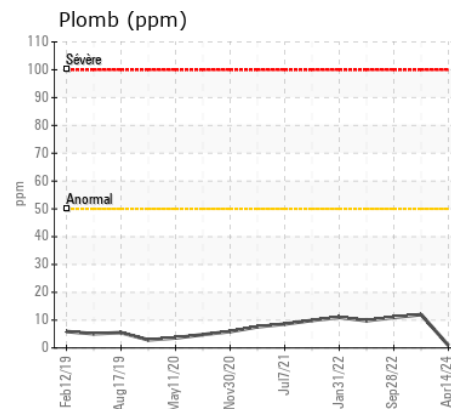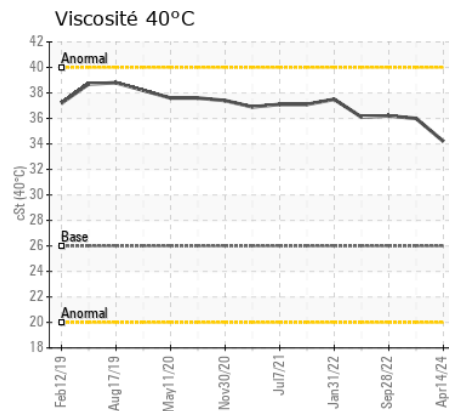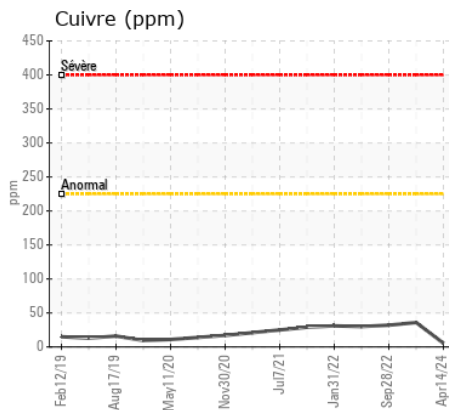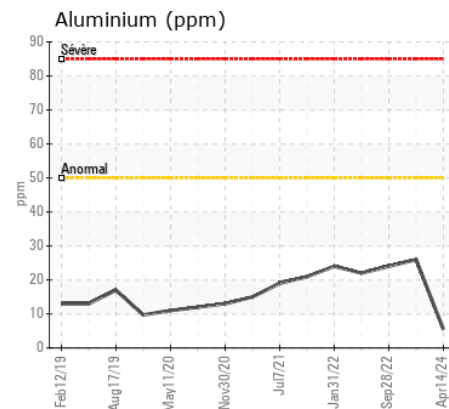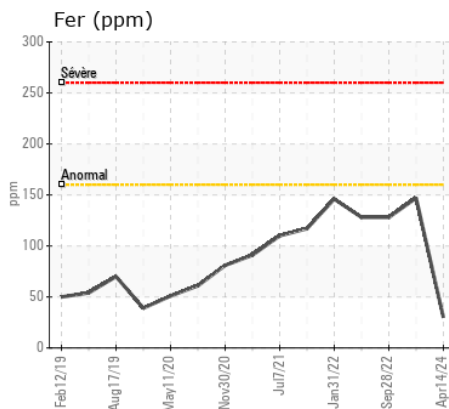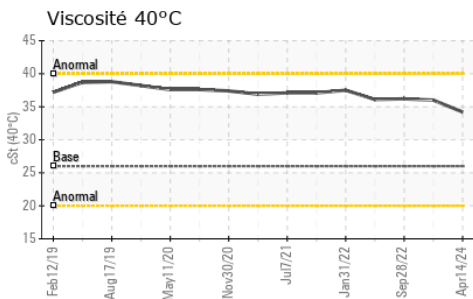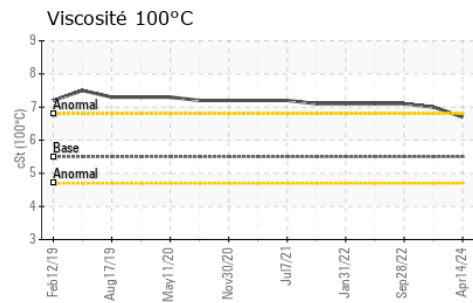

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

N° d'échantillon : PC0083764

N° de laboratoire : 02628920

Numéro unique : 5762052

Analyse : MOB 1 (Additional Tests: KV100, VI)

Reçu : 15 Apr 2024

Tested : 16 Apr 2024

Diagnostiqué : 16 Apr 2024 - Wes Davis

LES ENTREPRISES MICHAUVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

T:

F:

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.