



# RAPPORT D'ANALYSE D'HUILE

USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Secteur

## MICHAUDVILLE

Identité de la machine

### 1207

Composant

## Transmission (Auto)

Fluid

## DEXRON III (--- GAL)

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.  
Please specify the component make and model with your next sample.

### USURE

All component wear rates are normal.











### CONTAMINATION

There is no indication of any contamination in the fluid.

### ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0083724</b>	PC0082535	PC0077443
Date d'échant.		Client Info		<b>15 May 2024</b>	21 Nov 2023	14 Aug 2023
Âge d la Machine	hrs	Client Info		<b>14472</b>	13975	13467
Âge de l'huile	hrs	Client Info		<b>0</b>	0	0
Âge du filtre	hrs	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>NORMAL</b>	NORMAL	NORMAL
<hr/>						
Fer	ppm	ASTM D5185(m)	>160	<b>70</b>	68	52
Chrome	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Aluminium	ppm	ASTM D5185(m)	>50	<b>15</b>	13	11
Plomb	ppm	ASTM D5185(m)	>50	<b>2</b>	3	2
Cuivre	ppm	ASTM D5185(m)	>225	<b>12</b>	11	10
Étain	ppm	ASTM D5185(m)	>10	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
<hr/>						
Silicium	ppm	ASTM D5185(m)	>20	<b>5</b>	5	5
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	<1	1
L'eau		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Limon	scalar	Visual*	NONE	<b>VLITE</b>	NONE	VLITE
Débris	scalar	Visual*	NONE	<b>VLITE</b>	VLITE	NONE
Saleté	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
<hr/>						
Sodium	ppm	ASTM D5185(m)		<b>5</b>	4	4
Bore	ppm	ASTM D5185(m)		<b>68</b>	74	76
Baryum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdène	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Manganèse	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Magnésium	ppm	ASTM D5185(m)		<b>3</b>	3	3
Calcium	ppm	ASTM D5185(m)		<b>146</b>	152	144
Phosphore	ppm	ASTM D5185(m)		<b>236</b>	240	251
Zinc	ppm	ASTM D5185(m)		<b>18</b>	20	18
Soufre	ppm	ASTM D5185(m)		<b>1378</b>	1398	1407
Visc 40°C	cSt	ASTM D7279(m)	26.0	<b>33.9</b>	33.9	34.6
Visc 100°C	cSt	ASTM D7279(m)	5.5	<b>6.7</b>	6.7	6.9
Indice de viscosité (VI)	Scale	ASTM D2270*	155	<b>158</b>	158	164

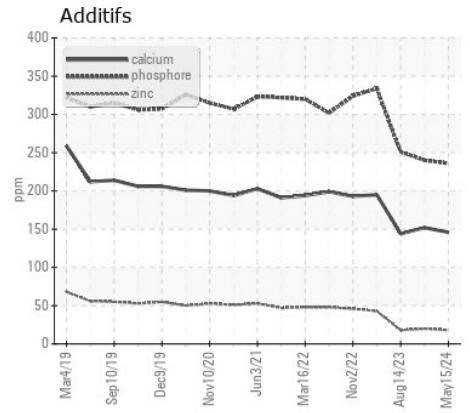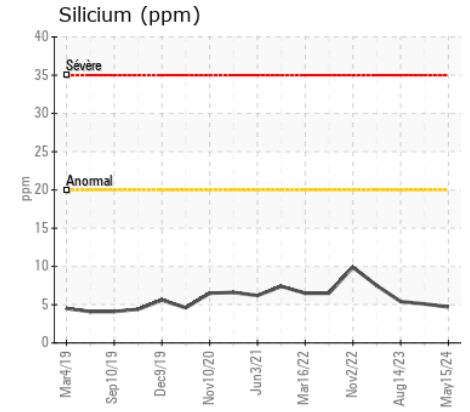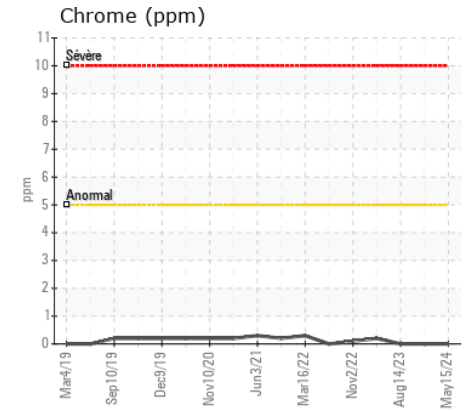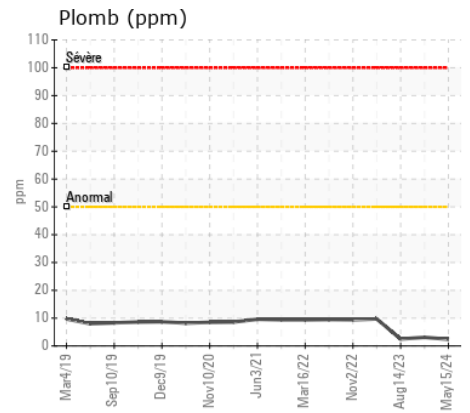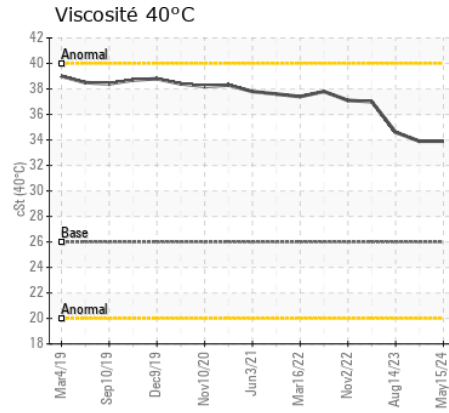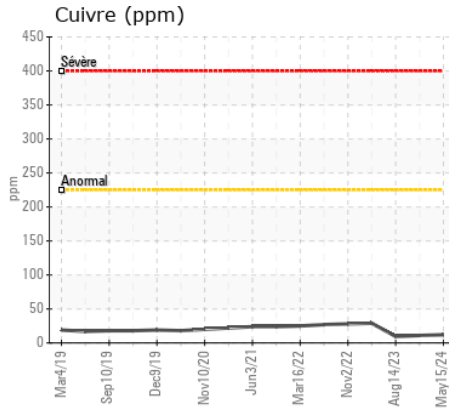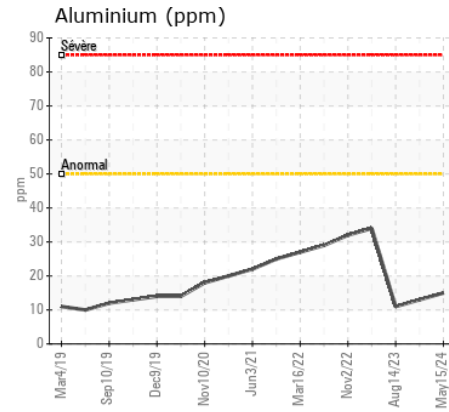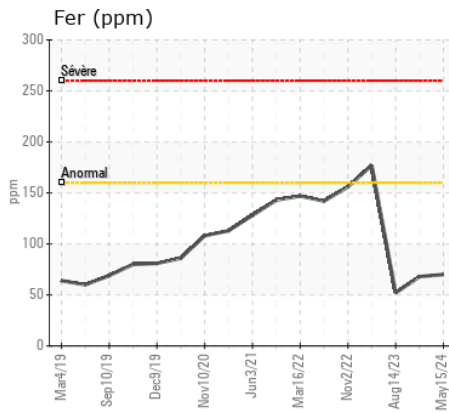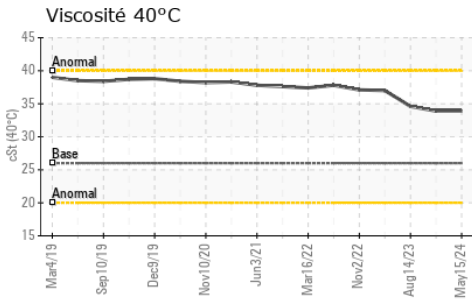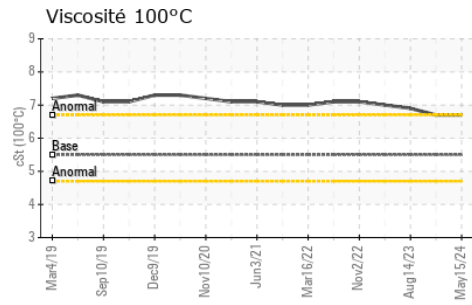

ISO 17025:2017  
Accredited  
Laboratory

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

**N° d'échantillon** : PC0083724

**N° de laboratoire** : 02636700

**Numéro unique** : 5785862

**Analyse** : MOB 1 ( Additional Tests: KV100, VI )

**Reçu** : 21 May 2024

**Tested** : 21 May 2024

**Diagnostiqué** : 21 May 2024 - Wes Davis

**LES ENTREPRISES MICHAUDVILLE INC.**

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

T:

F:

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.