



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur

MICHAUDVILLE

Identité de la machine

1227

Composant

Transmission (Auto)

Fluid

DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm. Please specify the component make and model with your next sample.

USURE

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0085261	PC0076041	PC0082244
Date d'échant.		Client Info		27 May 2024	17 Dec 2023	20 Sep 2023
Âge d la Machine	hrs	Client Info		4812	4324	3825
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL
<hr/>						
Fer	ppm	ASTM D5185(m)	>160	89	91	85
Chrome	ppm	ASTM D5185(m)	>5	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminium	ppm	ASTM D5185(m)	>50	55	52	49
Plomb	ppm	ASTM D5185(m)	>50	52	50	49
Cuivre	ppm	ASTM D5185(m)	>225	19	18	17
Étain	ppm	ASTM D5185(m)	>10	5	5	5
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE
<hr/>						
Silicium	ppm	ASTM D5185(m)	>20	6	7	7
Potassium	ppm	ASTM D5185(m)	>20	5	4	5
L'eau		WC Method	>0.1	NEG	NEG	NEG
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG
<hr/>						
Sodium	ppm	ASTM D5185(m)		7	6	8
Bore	ppm	ASTM D5185(m)		88	98	93
Baryum	ppm	ASTM D5185(m)		1	1	<1
Molybdène	ppm	ASTM D5185(m)		0	<1	1
Manganèse	ppm	ASTM D5185(m)		2	2	2
Magnésium	ppm	ASTM D5185(m)		1	<1	<1
Calcium	ppm	ASTM D5185(m)		43	45	42
Phosphore	ppm	ASTM D5185(m)		272	269	301
Zinc	ppm	ASTM D5185(m)		6	6	6
Soufre	ppm	ASTM D5185(m)		675	686	696
Visc 40°C	cSt	ASTM D7279(m)	26.0	36.7	36.5	36.3
Visc 100°C	cSt	ASTM D7279(m)	5.5	7.1	7.1	7.2
Indice de viscosité (VI)	Scale	ASTM D2270*	155	159	160	166

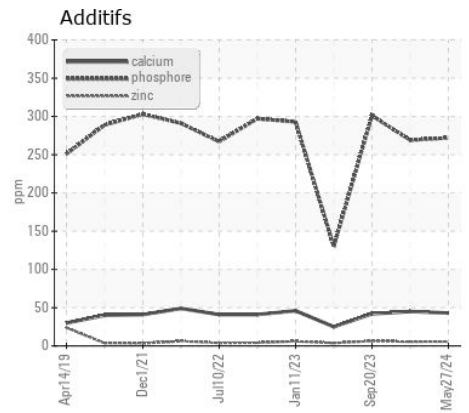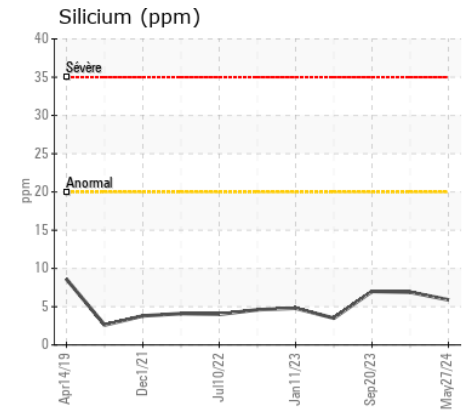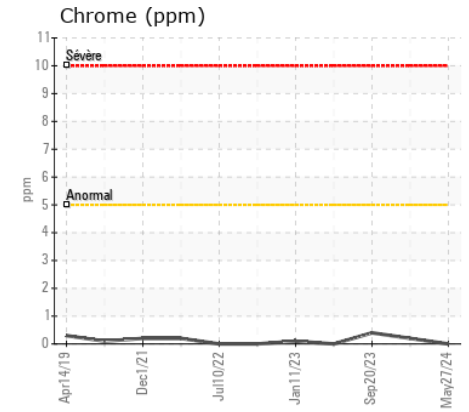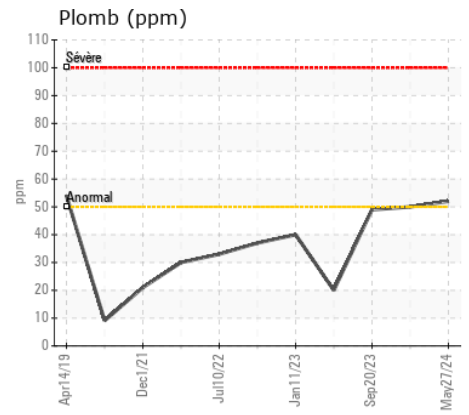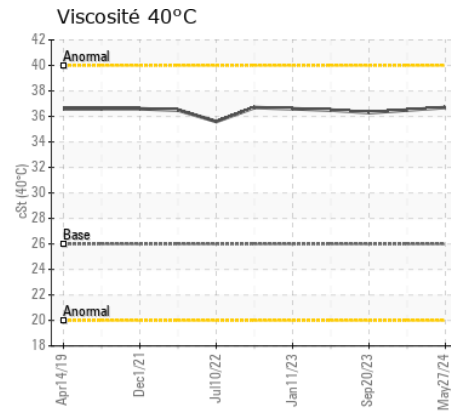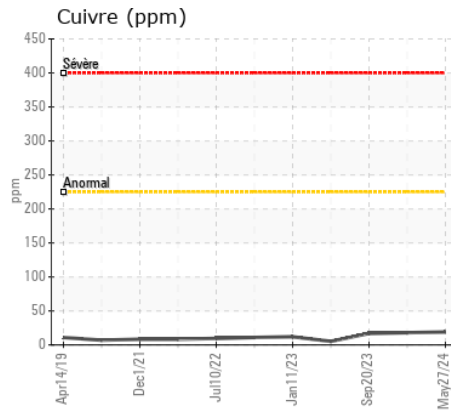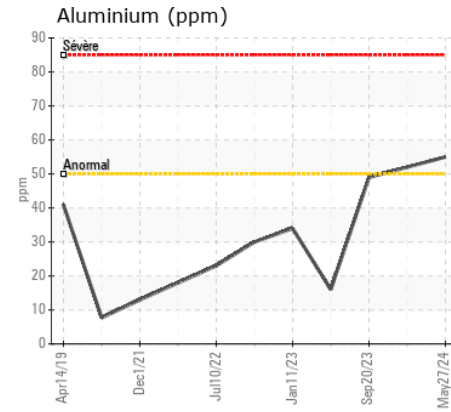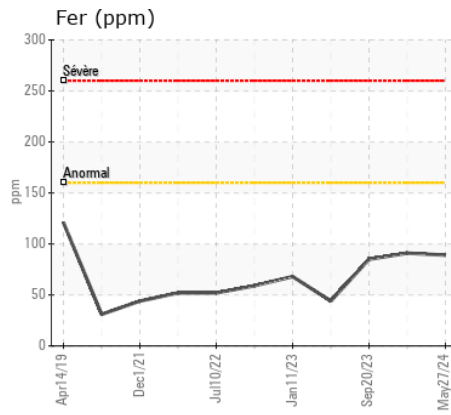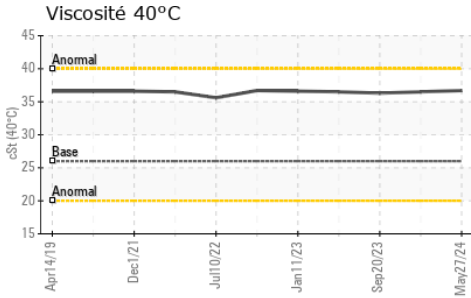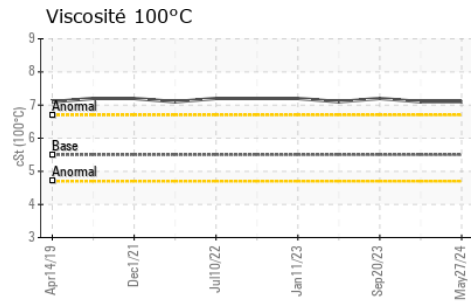

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

N° d'échantillon : PC0085261

N° de laboratoire : 02638161

Numéro unique : 5787323

Analyse : MOB 1 (Additional Tests: KV100, VI)

Reçu : 28 May 2024

Tested : 29 May 2024

Diagnostiqué : 29 May 2024 - Kevin Marson

LES ENTREPRISES MICHAUVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

T:

F:

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.