



Secteur

MICHAUDVILLE

Identité de la machine

1599

Composant

Transmission Manuelle

Fluid

{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

USURE

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0085264	PC0075960	PC0075980
Date d'échant.		Client Info		27 May 2024	26 Sep 2023	20 Jun 2023
Âge d la Machine	hrs	Client Info		26245	25710	25254
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL
Fer	ppm	ASTM D5185(m)	>200	180	160	65
Chrome	ppm	ASTM D5185(m)	>5	1	1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titane	ppm	ASTM D5185(m)		1	<1	<1
Argent	ppm	ASTM D5185(m)	>7	0	<1	0
Aluminium	ppm	ASTM D5185(m)	>25	10	9	3
Plomb	ppm	ASTM D5185(m)	>45	5	5	2
Cuivre	ppm	ASTM D5185(m)	>225	27	24	6
Étain	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	VLITE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE
Silicium	ppm	ASTM D5185(m)	>125	28	30	11
Potassium	ppm	ASTM D5185(m)	>20	6	7	2
L'eau		WC Method	>0.1	NEG	NEG	NEG
Limon	scalar	Visual*	NONE	VLITE	NONE	VLITE
Débris	scalar	Visual*	NONE	VLITE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		15	15	12
Bore	ppm	ASTM D5185(m)		226	242	122
Baryum	ppm	ASTM D5185(m)		21	20	9
Molybdène	ppm	ASTM D5185(m)		0	<1	<1
Manganèse	ppm	ASTM D5185(m)		5	4	1
Magnésium	ppm	ASTM D5185(m)		4	3	1
Calcium	ppm	ASTM D5185(m)		62	62	32
Phosphore	ppm	ASTM D5185(m)		1050	1091	616
Zinc	ppm	ASTM D5185(m)		36	30	10
Soufre	ppm	ASTM D5185(m)		534	572	223
Visc 40°C	cSt	ASTM D7279(m)		95.7	96.2	96.7
Visc 100°C	cSt	ASTM D7279(m)		14.7	14.9	14.9
Indice de viscosité (VI)	Scale	ASTM D2270*		160	162	161

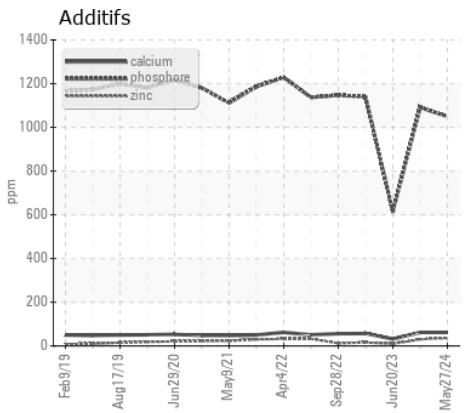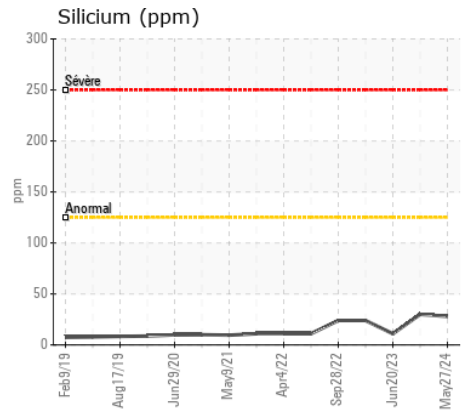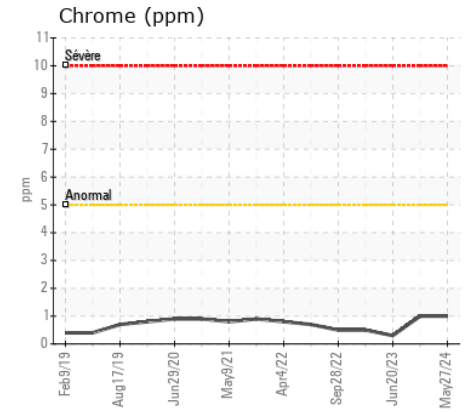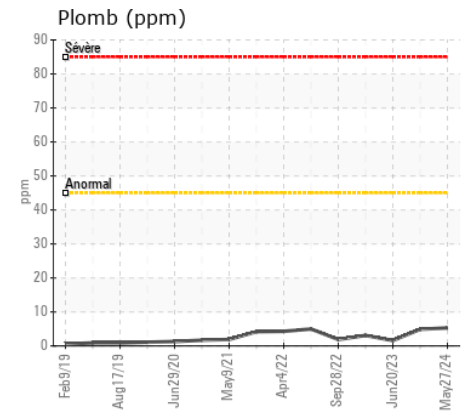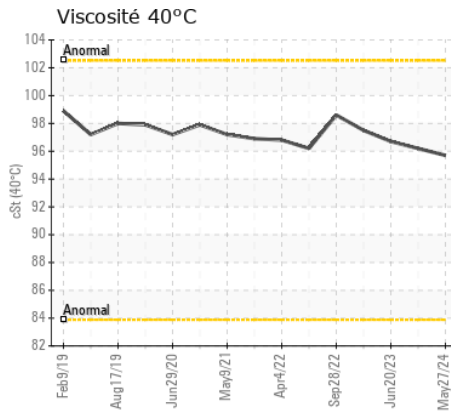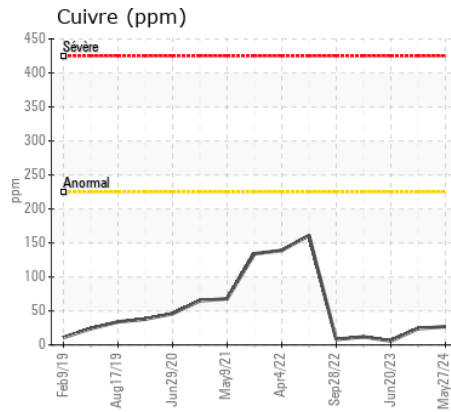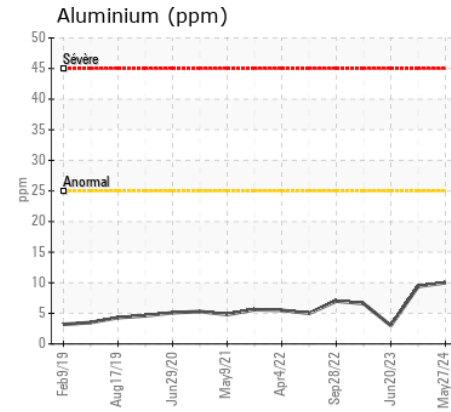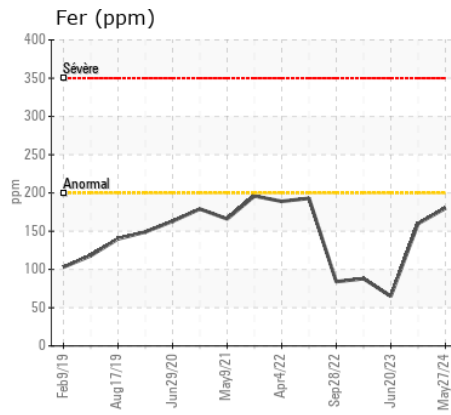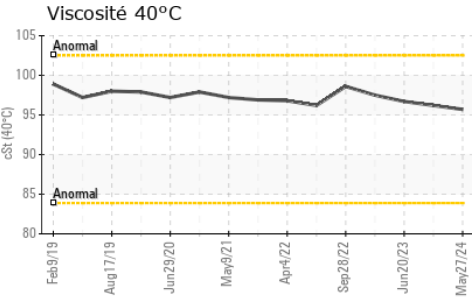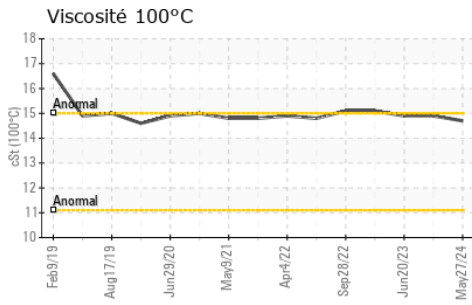

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

N° d'échantillon : PC0085264

N° de laboratoire : 02638162

Numéro unique : 5787324

Analyse : MOB 1 (Additional Tests: KV100, VI)

Reçu : 28 May 2024

Tested : 29 May 2024

Diagnostiqué : 29 May 2024 - Wes Davis

LES ENTREPRISES MICHAUVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

T:

F:

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.