



# RAPPORT D'ANALYSE D'HUILE

USURE	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
ÉTAT DU FLUIDE	<b>NORMAL</b>

Secteur

## MICHAUDVILLE

Identité de la machine

### 1253

Composant

## Transmission (Auto)

Fluid

## DEXRON III (--- GAL)

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.  
Please specify the component make and model with your next sample.

### USURE

All component wear rates are normal.












### CONTAMINATION

There is no indication of any contamination in the fluid.

### ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0088500</b>	PC0077580	PC0070952
Date d'échant.		Client Info		<b>30 May 2024</b>	19 Dec 2023	14 Mar 2023
Âge d la Machine	kms	Client Info		<b>126024</b>	0	3819
Âge de l'huile	kms	Client Info		<b>0</b>	0	0
Âge du filtre	kms	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>NORMAL</b>	NORMAL	NORMAL
<hr/>						
Fer	ppm	ASTM D5185(m)	>160	<b>152</b>	138	124
Chrome	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	1	1
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminium	ppm	ASTM D5185(m)	>50	<b>41</b>	37	30
Plomb	ppm	ASTM D5185(m)	>50	<b>44</b>	43	40
Cuivre	ppm	ASTM D5185(m)	>225	<b>19</b>	17	15
Étain	ppm	ASTM D5185(m)	>10	<b>5</b>	5	4
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	VLITE	VLITE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
<hr/>						
Silicium	ppm	ASTM D5185(m)	>20	<b>5</b>	6	5
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	5	5
L'eau		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Limon	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Débris	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Saleté	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>NEG</b>	NEG	.2%
<hr/>						
Sodium	ppm	ASTM D5185(m)		<b>6</b>	6	8
Bore	ppm	ASTM D5185(m)		<b>96</b>	96	99
Baryum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Molybdène	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	2
Manganèse	ppm	ASTM D5185(m)		<b>2</b>	2	2
Magnésium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>48</b>	51	46
Phosphore	ppm	ASTM D5185(m)		<b>257</b>	273	293
Zinc	ppm	ASTM D5185(m)		<b>7</b>	13	6
Soufre	ppm	ASTM D5185(m)		<b>688</b>	734	718
Visc 40°C	cSt	ASTM D7279(m)	26.0	<b>35.2</b>	35.4	35.7
Visc 100°C	cSt	ASTM D7279(m)	5.5	<b>7.0</b>	7	7
Indice de viscosité (VI)	Scale	ASTM D2270*	155	<b>164</b>	163	161

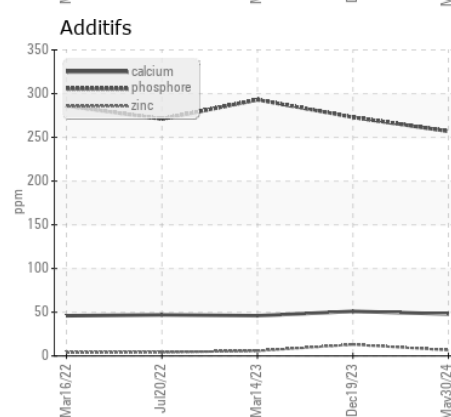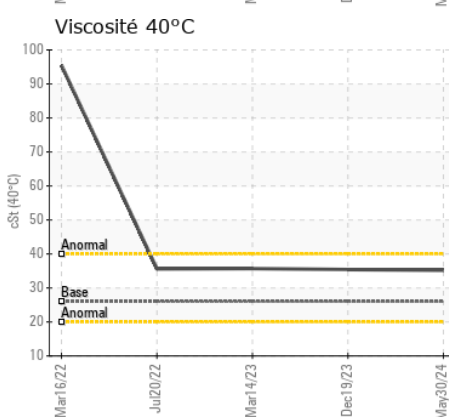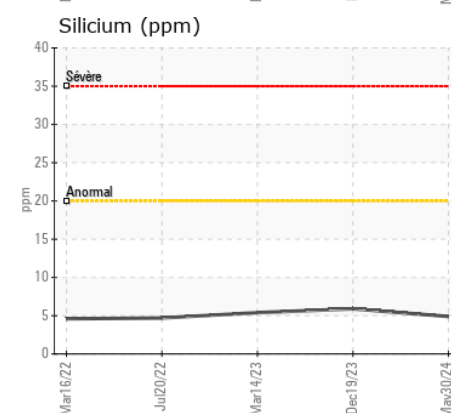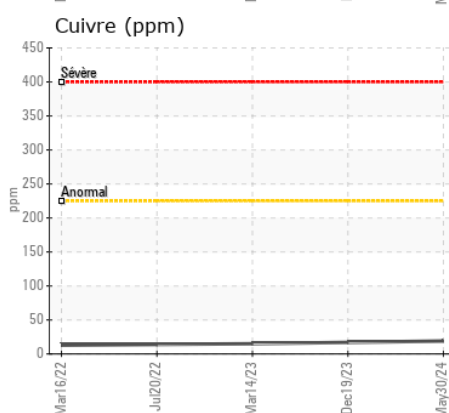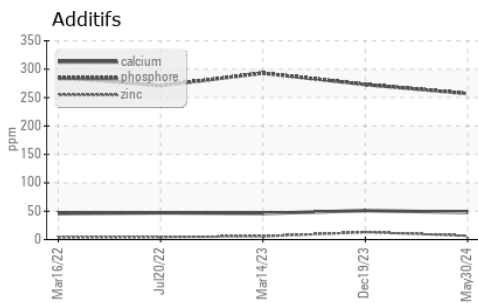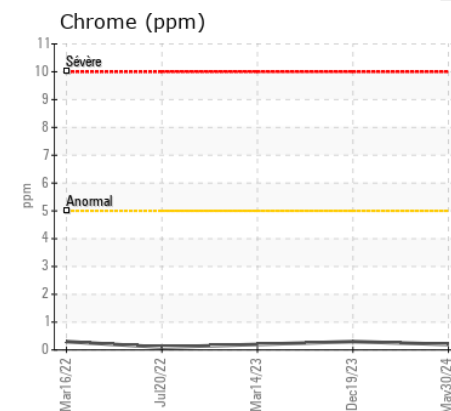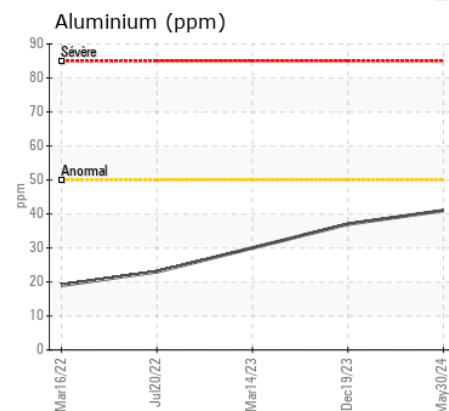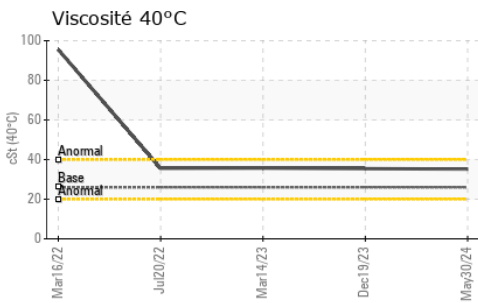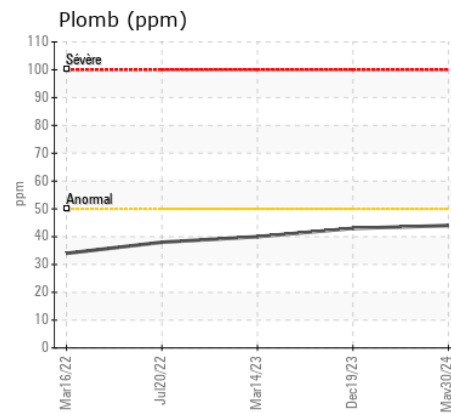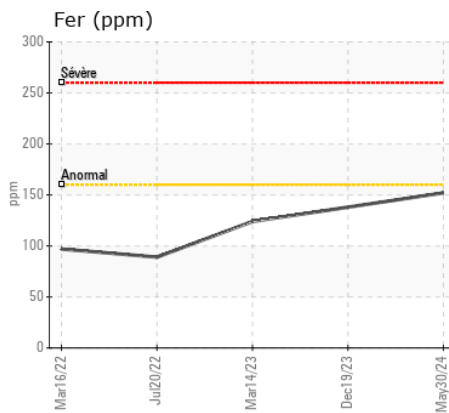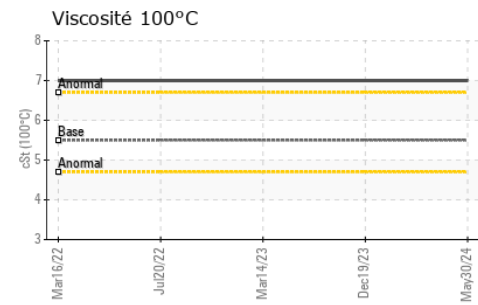

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**N° d'échantillon** : PC0088500  
**N° de laboratoire** : 02639210  
**Numéro unique** : 5788372  
**Analyse** : MOB 1 ( Additional Tests: KV100, VI )

**LES ENTREPRISES MICHAUDVILLE INC.**  
 270 RUE BRUNET  
 MONT ST-HILAIRE, QC  
 CA J3H 0M6  
 Contact: Martin Trudel  
 mtrudel@michaudville.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T:  
F: