



USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Identité de la machine

1522

Composant

Transmission (Auto)

Fluid

{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

USURE

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

ÉTAT DU FLUIDE

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0084324	PC0082270	PC0072124
Date d'échant.		Client Info		30 May 2024	02 Nov 2023	24 May 2023
Âge d la Machine	hrs	Client Info		1968	1492	998
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL
Fer	ppm	ASTM D5185(m)	>160	127	130	99
Chrome	ppm	ASTM D5185(m)	>5	1	1	1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titane	ppm	ASTM D5185(m)		<1	0	<1
Argent	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminium	ppm	ASTM D5185(m)	>50	2	2	2
Plomb	ppm	ASTM D5185(m)	>50	<1	1	1
Cuivre	ppm	ASTM D5185(m)	>225	59	61	55
Étain	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	VLITE	LIGHT
Bronze	scalar	Visual*	NONE	VLITE	NONE	NONE
Silicium	ppm	ASTM D5185(m)	>20	3	6	8
Potassium	ppm	ASTM D5185(m)	>20	2	1	2
L'eau		WC Method	>0.1	NEG	NEG	NEG
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		8	9	8
Bore	ppm	ASTM D5185(m)		167	183	176
Baryum	ppm	ASTM D5185(m)		5	5	5
Molybdène	ppm	ASTM D5185(m)		0	<1	<1
Manganèse	ppm	ASTM D5185(m)		11	11	10
Magnésium	ppm	ASTM D5185(m)		97	103	97
Calcium	ppm	ASTM D5185(m)		263	288	277
Phosphore	ppm	ASTM D5185(m)		1174	1347	1341
Zinc	ppm	ASTM D5185(m)		294	323	292
Soufre	ppm	ASTM D5185(m)		826	907	896
Visc 40°C	cSt	ASTM D7279(m)		90.9	91.4	93.8
Visc 100°C	cSt	ASTM D7279(m)		13.5	13.8	14.0
Indice de viscosité (VI)	Scale	ASTM D2270*		149	153	152

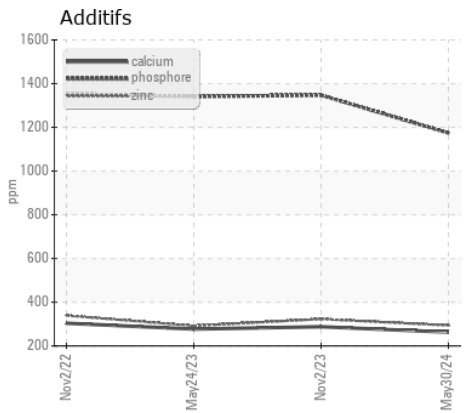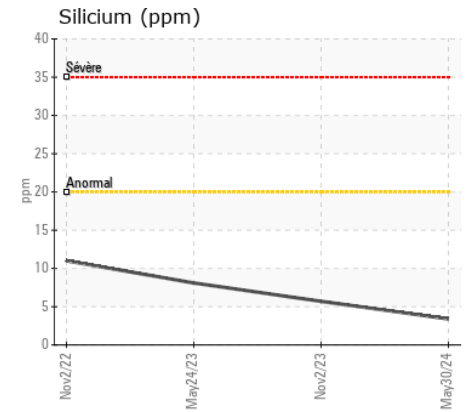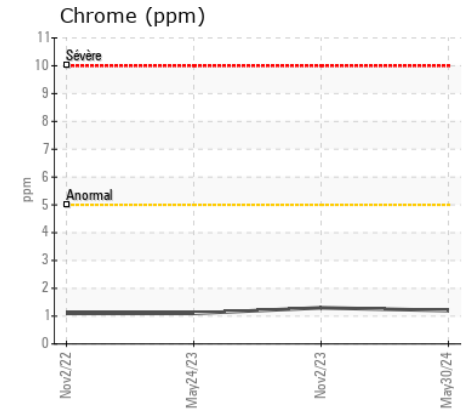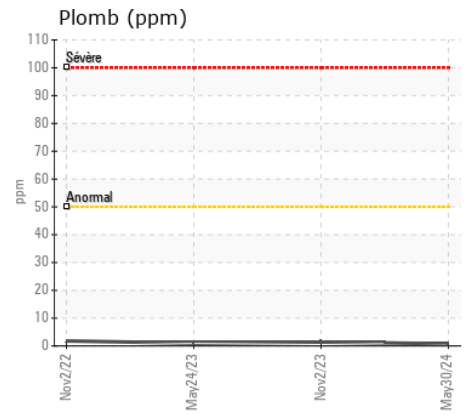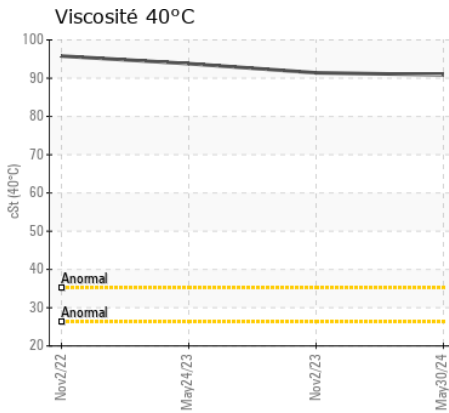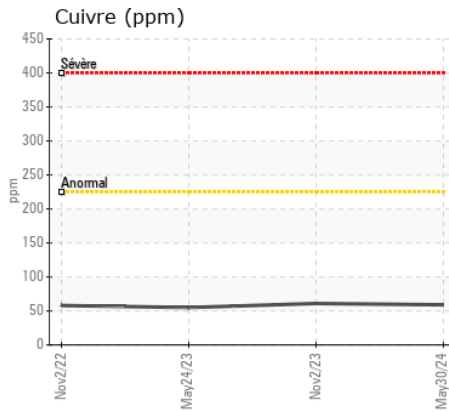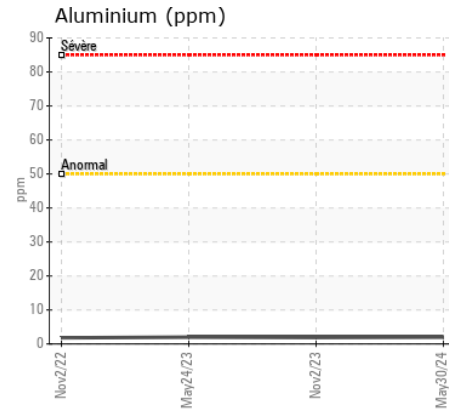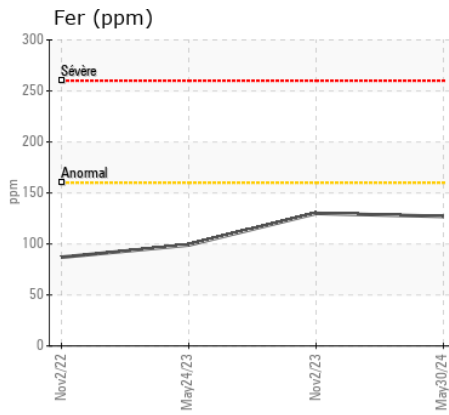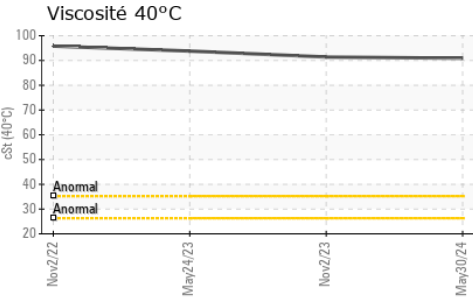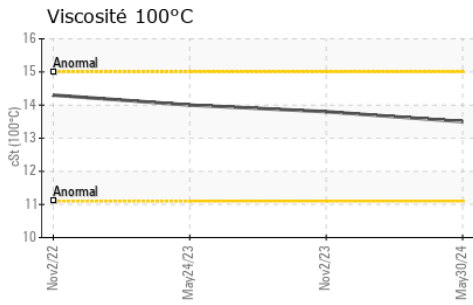

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

N° d'échantillon : PC0084324

N° de laboratoire : 02639211

Numéro unique : 5788373

Analyse : MOB 1 (Additional Tests: KV100, VI)

Reçu : 31 May 2024

Tested : 31 May 2024

Diagnostiqué : 31 May 2024 - Wes Davis

LES ENTREPRISES MICHAUDVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

T:

F:

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.