



Identité de la machine

1254

Composant

Moteur diesel

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0085117	PC0072156	PC0083682
Date d'échant.		Client Info		11 Jun 2024	07 Jan 2024	26 Dec 2023
Âge d la Machine	kms	Client Info		97648	4464	4452
Âge de l'huile	kms	Client Info		0	0	0
Âge du filtre	kms	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				NORMAL	NORMAL	NORMAL

USURE

Metal levels are typical for a new component breaking in.

Fer	ppm	ASTM D5185(m)	>100	12	2	4
Chrome	ppm	ASTM D5185(m)	>20	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>3	0	0	0
Aluminium	ppm	ASTM D5185(m)	>20	9	2	5
Plomb	ppm	ASTM D5185(m)	>40	0	<1	0
Cuivre	ppm	ASTM D5185(m)	>330	13	3	13
Étain	ppm	ASTM D5185(m)	>15	<1	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	2	3	2
Potassium	ppm	ASTM D5185(m)	>20	14	2	6
Essence		WC Method	>5	<1.0	<1.0	<1.0
L'eau		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
% de suie	%	ASTM D7844*	>3	0.1	0	0
Nitration	Abs/cm	ASTM D7624*	>20	6.3	4.5	5.3
Sulfatation	Abs/.1mm	ASTM D7415*	>30	18.7	17.8	17.3
Eau émulsifiée	scalar	Visual*	>0.2	NEG	NEG	NEG

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	<1	<1	1
Bore	ppm	ASTM D5185(m)	250	1	<1	2
Baryum	ppm	ASTM D5185(m)	10	0	0	0
Molybdène	ppm	ASTM D5185(m)	100	58	57	56
Manganèse	ppm	ASTM D5185(m)		<1	0	0
Magnésium	ppm	ASTM D5185(m)	450	955	962	937
Calcium	ppm	ASTM D5185(m)	3000	1080	1023	1014
Phosphore	ppm	ASTM D5185(m)	1150	1004	1014	963
Zinc	ppm	ASTM D5185(m)	1350	1189	1175	1133
Soufre	ppm	ASTM D5185(m)	4250	2539	2808	2593
Oxydation	Abs/.1mm	ASTM D7414*	>25	14.1	13.0	12.5
Visc 40°C	cSt	ASTM D7279(m)	115	94.9	113	105
Visc 100°C	cSt	ASTM D7279(m)	14.4	13.7	15.3	14.6
Indice de viscosité (VI)	Scale	ASTM D2270*	126	146	141	143

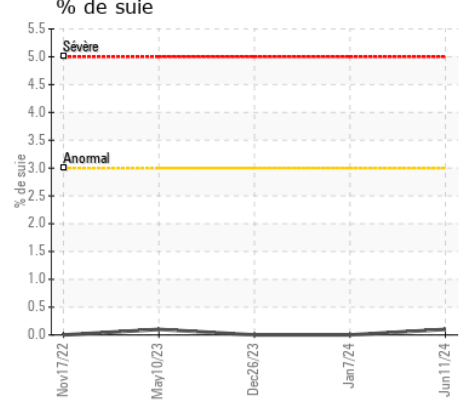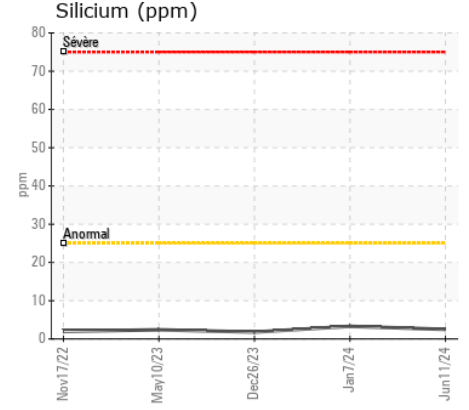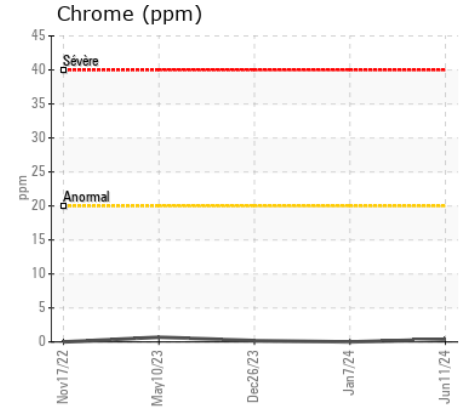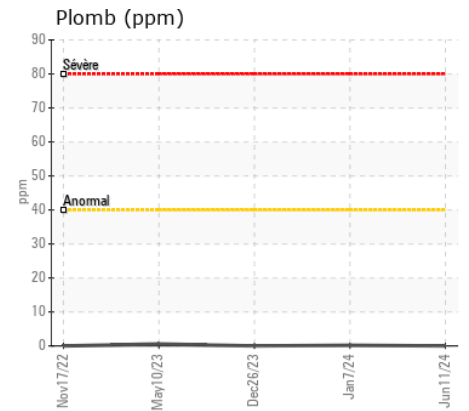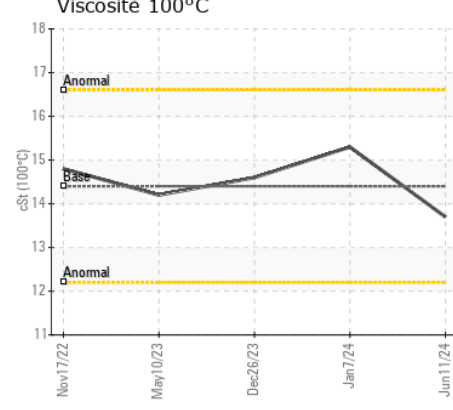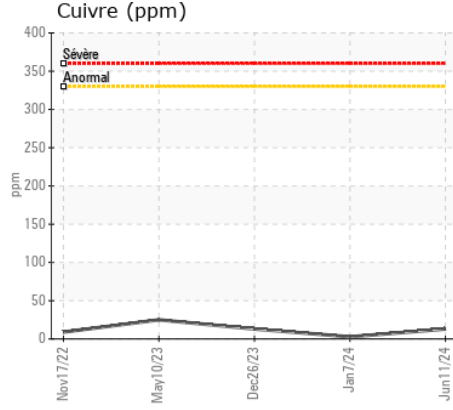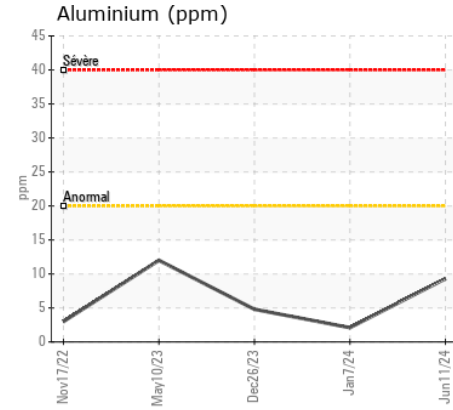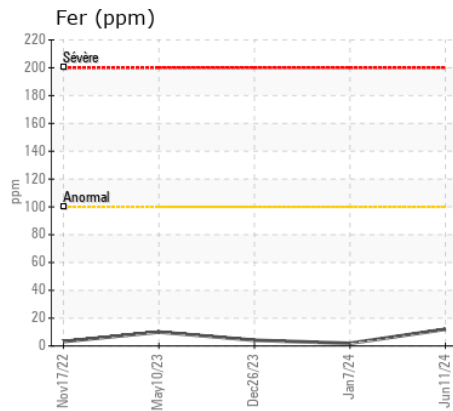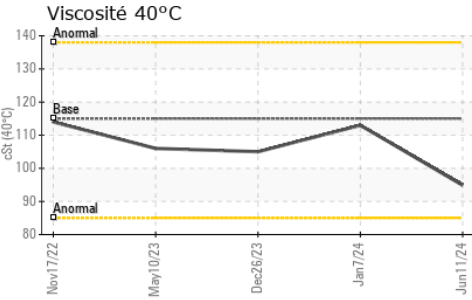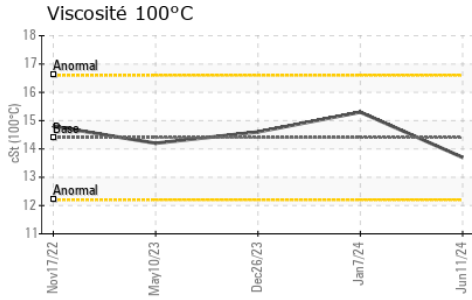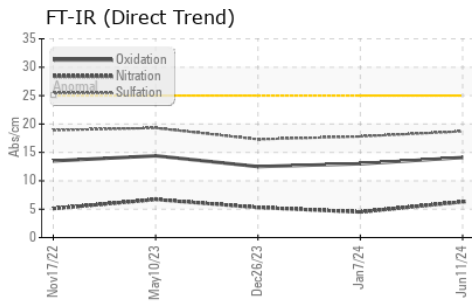

ISO 17025:2017
Accredited
Laboratory

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

N° d'échantillon : PC0085117

N° de laboratoire : 02641369

Numéro unique : 5798908

Analyse : MOB 1 (Additional Tests: KV40, VI)

Reçu : 12 Jun 2024

Tested : 12 Jun 2024

Diagnostiqué : 12 Jun 2024 - Wes Davis

LES ENTREPRISES MICHAUDVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T:

F: