



RAPPORT D'ANALYSE D'HUILE

USURE	NORMAL
CONTAMINATION	NORMAL
ÉTAT DU FLUIDE	NORMAL

Secteur

[104635]

Identité de la machine

74703571

Composant

Moteur diesel

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 15W40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		CU0023406	---	---
Date d'échant.		Client Info		13 Jun 2024	---	---
Âge d la Machine	hrs	Client Info		568	---	---
Âge de l'huile	hrs	Client Info		0	---	---
Âge du filtre	hrs	Client Info		0	---	---
Huile changée		Client Info		Changed	---	---
Filtre changé		Client Info		Changed	---	---
Statut de l'échant.				NORMAL	---	---

USURE

Metal levels are typical for a new component breaking in.

Fer	ppm	ASTM D5185(m)	>90	10	---	---
Chrome	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titane	ppm	ASTM D5185(m)	>2	0	---	---
Argent	ppm	ASTM D5185(m)	>2	0	---	---
Aluminium	ppm	ASTM D5185(m)	>20	2	---	---
Plomb	ppm	ASTM D5185(m)	>40	<1	---	---
Cuivre	ppm	ASTM D5185(m)	>330	18	---	---
Étain	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Métal blanc	scalar	Visual*	NONE	VLITE	---	---
Bronze	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicium	ppm	ASTM D5185(m)	>25	15	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Essence		WC Method	>3.0	<1.0	---	---
L'eau		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
% de suie	%	ASTM D7844*	>6	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.6	---	---
Sulfatation	Abs/.1mm	ASTM D7415*	>30	20.3	---	---
Limon	scalar	Visual*	NONE	NONE	---	---
Débris	scalar	Visual*	NONE	NONE	---	---
Saleté	scalar	Visual*	NONE	NONE	---	---
Apparence	scalar	Visual*	NORML	NORML	---	---
Odeur	scalar	Visual*	NORML	NORML	---	---
Eau émulsifiée	scalar	Visual*	>0.2	NEG	---	---

ÉTAT DU FLUIDE

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	4	---	---
Bore	ppm	ASTM D5185(m)	250	123	---	---
Baryum	ppm	ASTM D5185(m)	10	<1	---	---
Molybdène	ppm	ASTM D5185(m)	100	14	---	---
Manganèse	ppm	ASTM D5185(m)		<1	---	---
Magnésium	ppm	ASTM D5185(m)	450	223	---	---
Calcium	ppm	ASTM D5185(m)	3000	2030	---	---
Phosphore	ppm	ASTM D5185(m)	1150	881	---	---
Zinc	ppm	ASTM D5185(m)	1350	1042	---	---
Soufre	ppm	ASTM D5185(m)	4250	2711	---	---
Oxydation	Abs/.1mm	ASTM D7414*	>25	16.8	---	---
Visc 40°C	cSt	ASTM D7279(m)	115	104	---	---
Visc 100°C	cSt	ASTM D7279(m)	14.4	13.7	---	---
Indice de viscosité (VI)	Scale	ASTM D2270*	126	131	---	---

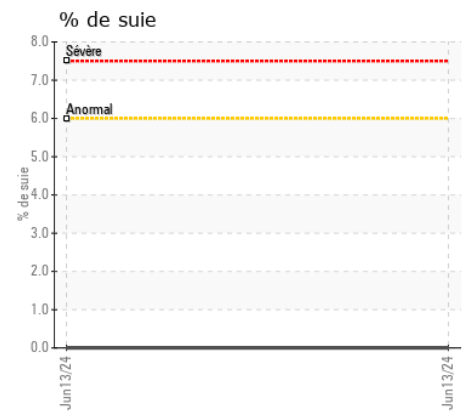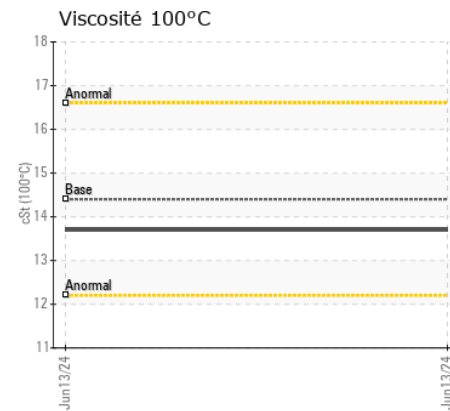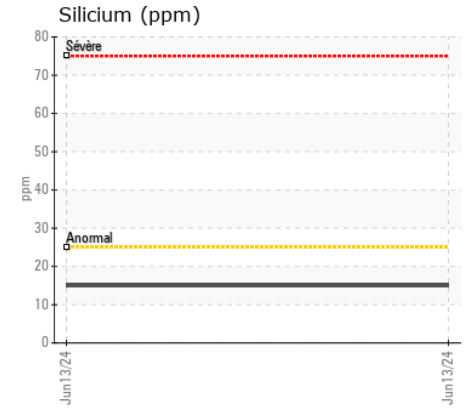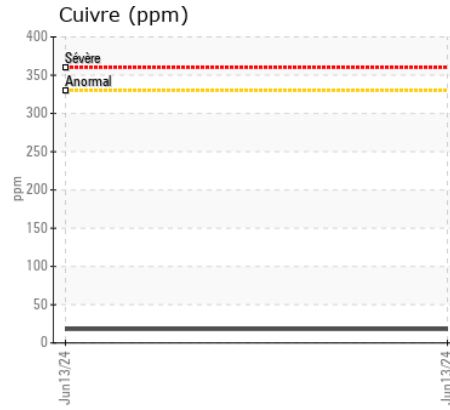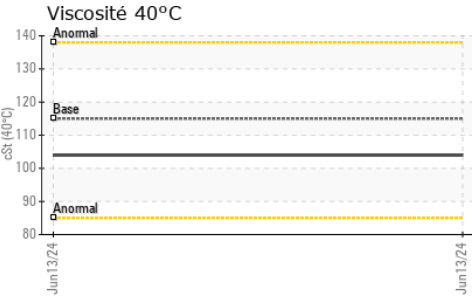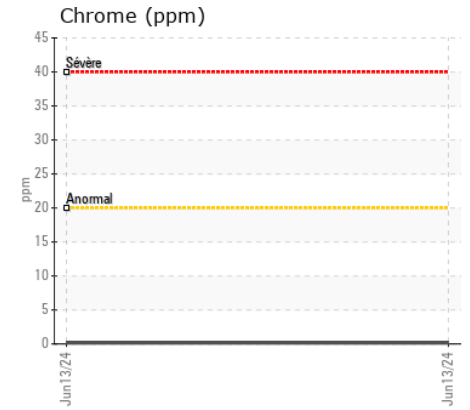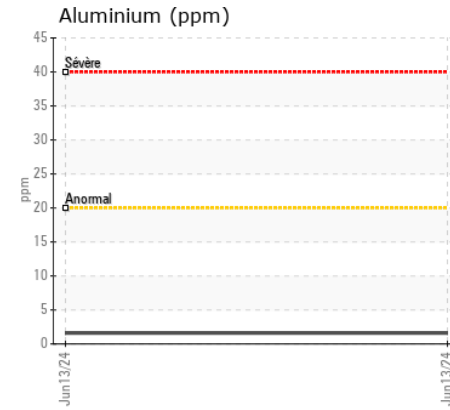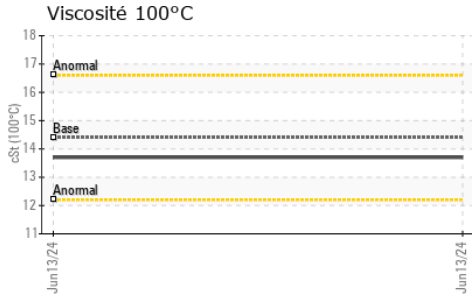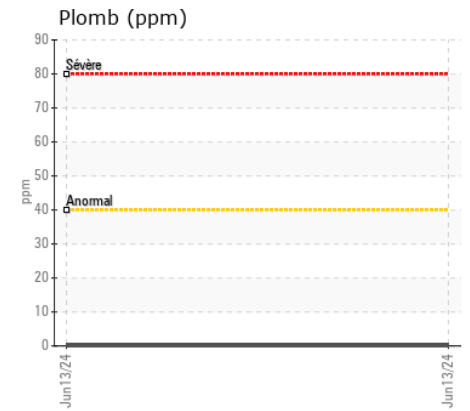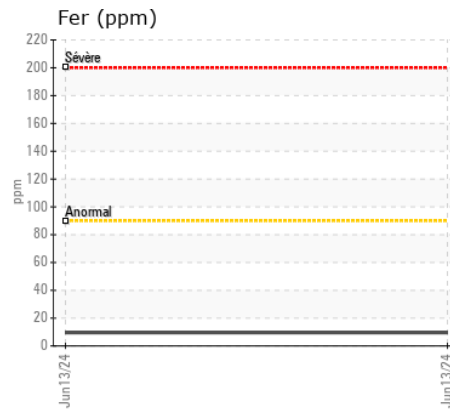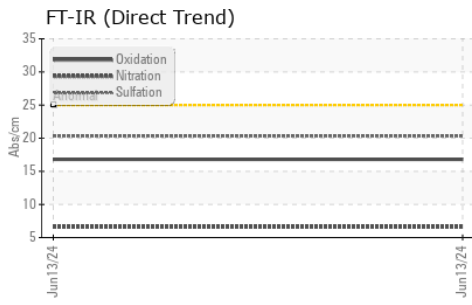

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
N° d'échantillon : CU0023406
N° de laboratoire : 02642250
Numéro unique : 5799789
Analyse : MOB 1 (Additional Tests: KV40, VI, Visual)

CUMMINS EASTERN CANADA LP
 3189 SWANSEA CRESCENT
 OTTAWA, ON
 CA K1G 3W5
 Contact: Cindy Harrison
 cindy.harrison@cummins.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.

T: (613)736-1146

F: x: