



RAPPORT D'ANALYSE D'HUILE

USURE

ANORMAL

CONTAMINATION

NORMAL

ÉTAT DU FLUIDE

NORMAL

Secteur

MICHAUDVILLE

Identité de la machine

1223

Composant

Transmission (Auto)

Fluid

DEXRON III (--- GAL)

RECOMMENDATION

We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm. Please specify the component make and model with your next sample.

USURE

Aluminum ppm levels are abnormal. Torque converter wear is indicated.












CONTAMINATION

There is no indication of any contamination in the fluid.

ÉTAT DU FLUIDE

The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		PC0084300	PC0084451	PC0082929
Date d'échant.		Client Info		26 Jun 2024	12 Mar 2024	21 Nov 2023
Âge d la Machine	hrs	Client Info		10402	9879	9439
Âge de l'huile	hrs	Client Info		0	0	0
Âge du filtre	hrs	Client Info		0	0	0
Huile changée		Client Info		N/A	N/A	N/A
Filtre changé		Client Info		N/A	N/A	N/A
Statut de l'échant.				ABNORMAL	ABNORMAL	ABNORMAL
Fer	ppm	ASTM D5185(m)	>160	143	143	136
Chrome	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titane	ppm	ASTM D5185(m)		0	0	0
Argent	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminium	ppm	ASTM D5185(m)	>50	▲ 81	▲ 77	▲ 76
Plomb	ppm	ASTM D5185(m)	>50	19	18	18
Cuivre	ppm	ASTM D5185(m)	>225	26	24	24
Étain	ppm	ASTM D5185(m)	>10	7	6	6
Vanadium	ppm	ASTM D5185(m)		0	0	0
Métal blanc	scalar	Visual*	NONE	NONE	NONE	NONE
Bronze	scalar	Visual*	NONE	NONE	NONE	NONE
Silicium	ppm	ASTM D5185(m)	>20	15	14	15
Potassium	ppm	ASTM D5185(m)	>20	2	3	3
L'eau		WC Method	>0.1	NEG	NEG	NEG
Limon	scalar	Visual*	NONE	NONE	NONE	NONE
Débris	scalar	Visual*	NONE	NONE	NONE	NONE
Saleté	scalar	Visual*	NONE	NONE	NONE	NONE
Apparence	scalar	Visual*	NORML	NORML	NORML	NORML
Odeur	scalar	Visual*	NORML	NORML	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		5	5	5
Bore	ppm	ASTM D5185(m)		63	63	64
Baryum	ppm	ASTM D5185(m)		<1	0	<1
Molybdène	ppm	ASTM D5185(m)		0	0	0
Manganèse	ppm	ASTM D5185(m)		2	1	1
Magnésium	ppm	ASTM D5185(m)		1	2	<1
Calcium	ppm	ASTM D5185(m)		98	98	98
Phosphore	ppm	ASTM D5185(m)		206	215	217
Zinc	ppm	ASTM D5185(m)		5	6	5
Soufre	ppm	ASTM D5185(m)		1037	1131	1048
Visc 40°C	cSt	ASTM D7279(m)	26.0	32.4	32.7	32.5
Visc 100°C	cSt	ASTM D7279(m)	5.5	6.4	6.4	6.4
Indice de viscosité (VI)	Scale	ASTM D2270*	155	153	151	153

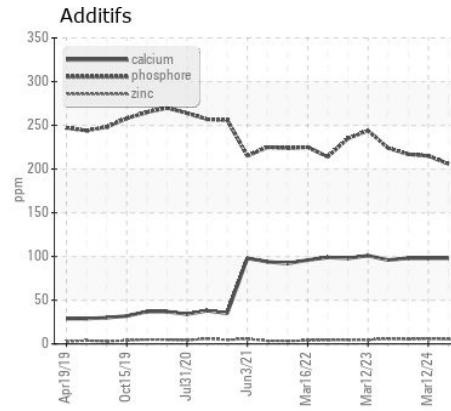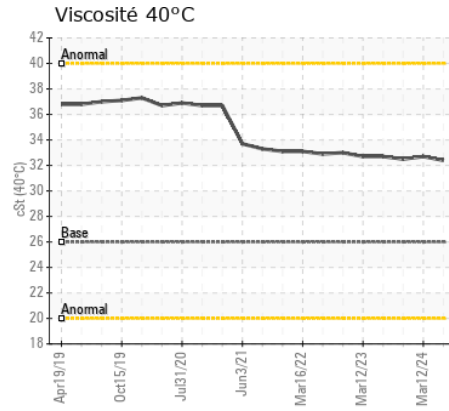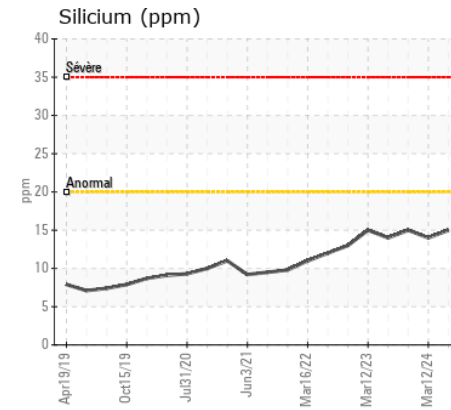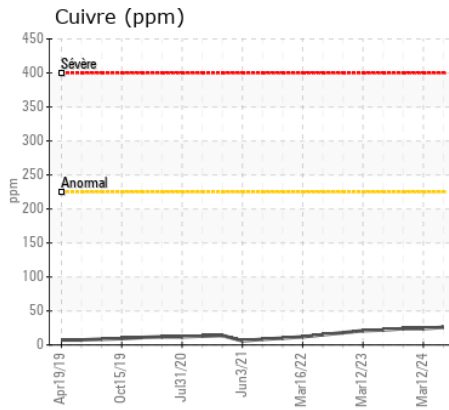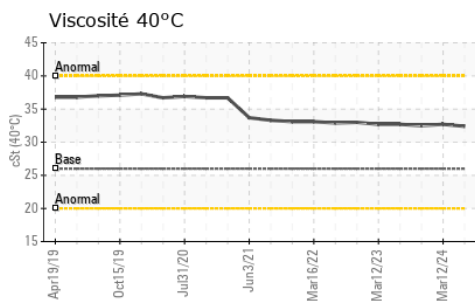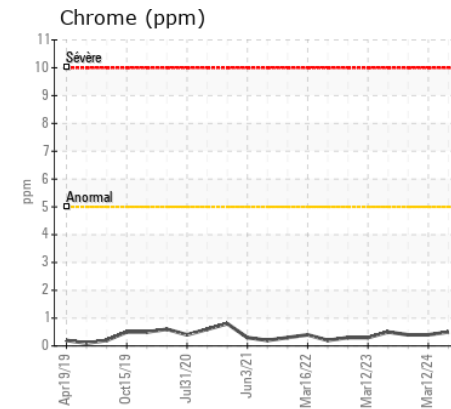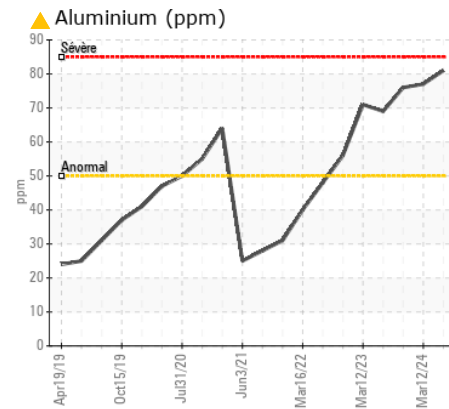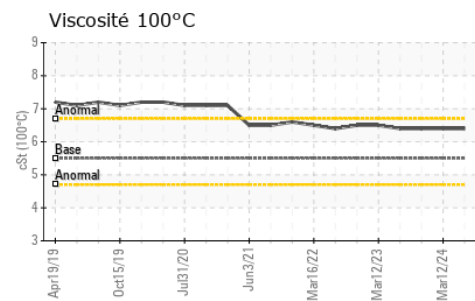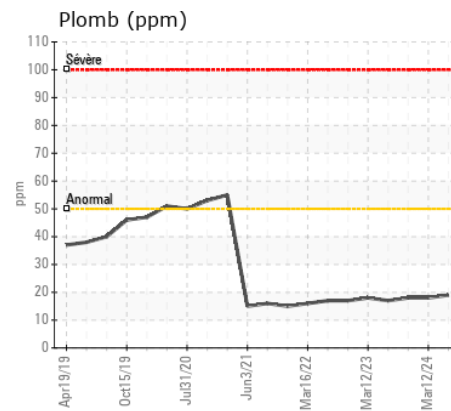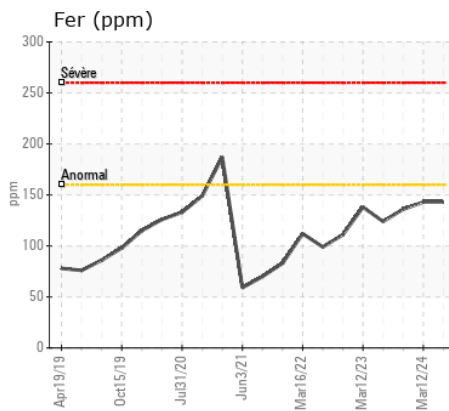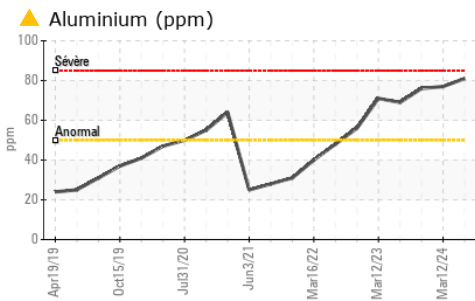

Laboratoire : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
N° d'échantillon : PC0084300
N° de laboratoire : 02644369
Numéro unique : 5801908
Analyse : MOB 1 (Additional Tests: KV100, VI)

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.