

LABORATORY ANALYSIS



11525 Rock Island Court, St. Louis, MO 63043
Tel: 1-800-876-0008 info@englube.com

Department **REYLAM-PRESS**
 Equipment No. **REWSC0102 COIL REWIND 2(SCROLL LINE 1) (00063)**
 System **Gearbox**
 Oil Type **ENGINEERED LUBRICANTS ENLUBE S-POLY-G-2188-WGO-X (--- GAL)**

COPELAND (MHDS)
 6001 S. 35TH STREET, SUITE D
 REYNOSA, ZZ
 US
 Contact: GERARDO GUERRERO
 francisco.castillo@Copeland.com
 T:
 F:

Diagnosis

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable. TAN and mg KOH/g is abnormally high. Phosphorus(P) ppm levels are abnormally low.

Sample Information

Lab Number	New	2404-00871	2401-00757	2310-00791
Date of Sample	(Typical)	05 Apr 2024	19 Jan 2024	10 Oct 2023
Oil Added		UNK	UNK	UNK
Last Drain Date		--	--	--
Last Filter Service		--	--	--
Sample Point		---	---	---
Sample Status		ABNORMAL	ABNORMAL	NORMAL

VISCOSITY INDEX (ASTM D445)

cSt Vis. @ 40C	cSt	460	31.44	669.1	461.1
SSU Vis. @ 100F	SSU		148.0	3,100.5	2,136.5
cSt Vis. @ 100C	cSt		5.474	85.91	75.5
SSU Vis. @ 210F	SSU		44.2	401.0	352.5
cSt Vis. @ 40C	cSt	460	31.44	669.1	461.1
SSU Vis. @ 40C	SSU		148.0	3,100.5	2,136.5
cSt Vis. @ 100C	cSt		5.474	85.91	75.5
SSU Vis. @ 100C	SSU		44.2	401.0	352.5
Viscosity Index			110	217	245

TOTAL ACID NUMBER (NEUT. NO.)(ASTM D974)

TAN, mg KOH/g	mg KOH/g	0.61	▲ 2.42	■ 0.58	■ 0.49
---------------	----------	------	---------------	--------	--------


Hiac Particle Count/ISO 4406

4 Micron & Larger	particles/ml	>640000	■ 39,039	■ 93,485	■ 3,859
6 Micron & Larger	particles/ml	>80000	■ 5,264	■ 27,770	■ 885
14 Micron & Larger	particles/ml	>2500	■ 233	● 3,601	■ 54
ISO Code	ISO 4406(c)	>26/23/18	■ 22/20/15	● 24/22/19	■ 19/17/13

ENERGY DISPERSIVE XRF - PPM (*BELOW MINIMUM DETECTION LIMIT)

Aluminum (Al)	ppm		*	*	*
Antimony (Sb)	ppm		*	*	*
Cadmium (Cd)	ppm		*	*	*
Chromium (Cr)	ppm		*	*	*
Cobalt (Co)	ppm		*	*	*
Copper (Cu)	ppm		■ *	■ *	■ *
Iron (Fe)	ppm		■ 60	■ *	■ *
Lead (Pb)	ppm		*	*	*
Manganese (Mn)	ppm		*	*	*
Molybdenum(Mo)	ppm		*	*	*
Nickel (Ni)	ppm		*	*	*
Potassium (K)	ppm		■ *	■ *	■ *
Tin (Sn)	ppm		*	*	*
Titanium (Ti)	ppm		*	*	*
Vanadium (V)	ppm		*	*	*
Barium (Ba)	ppm		192	*	*
Calcium (Ca)	ppm		*	*	*
Magnesium (Mg)	ppm		*	*	*
Phosphorus(P)	ppm	957	▲ 526	▲ 347	■ 697
Silicon (Si)	ppm		*	*	*
Zinc (Zn)	ppm		17	*	12
Chlorine (Cl)	ppm		*	*	*
Sulfur (S)	ppm	555	2,160	1,930	284

Customer Id: MOTMCA
Sample No.: EN24040871
Lab Number: 24040871
Test Package: TEST




To manage this report scan the QR code

To discuss the diagnosis or test data:
 Brian Klutenkamper +1 (314)872-9540
bklutenkamper@englube.com

To change component or sample information:
 Tracy Weaks +1 (314)872-9540
tweaks@englube.com

OIL ANALYSIS REPORT

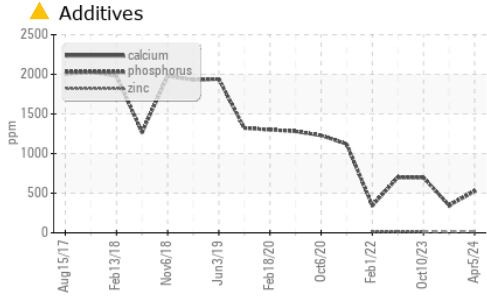

DR FERROGRAPHY READINGS

L		■ 3.5	■ 37.0	■ 13.5
S		■ 0.5	■ 1.0	■ 6.0
WPC	DL + DS	■ 4	■ 38	■ 19.5

Contamination

Water	>0.45	NEG	NEG	NEG
-------	-------	------------	-----	-----

