


SOUTH HEATER


| Customer: PTRHTF10043 | System Information | Sample Information |
|-----------------------------------|----------------------------------|------------------------------------|
| MALARKY ROOFING PRODUCTS | System Volume: 1200 gal | Lab No: 02207734 |
| 3131 N. COLUMBIA BLVD | Bulk Operating Temp: 620F / 327C | Analyst: Ron LeBlanc |
| PORTLAND, OR 97217 USA | Heating Source: | Sample Date: 03/16/18 |
| Attn: Jeff Tonn | Blanket: | Received Date: 04/02/18 |
| Tel: | Fluid: PETRO CANADA CALFLO HTF | Completed: 04/05/18 |
| E-Mail: jtonn@malarkeyroofing.com | Make: AMERICAN HEATING | To discuss this report contact Ron |
| | | LeBlanc at (541)678-7044 |


Recommendation: Flasch point has decreased. System might need to be sweetened with new oil to raise flash point. Purge more oil at sample point and submit a new sample to check results.

Comments: COC Flash Point is severely low. (GCD) % < 335°C is marginally high.


| Sample Date | Received Date | Fluid Age | Sample Location | Flash Point (COC) | Water (KF) | Viscosity (40°C) | Acid Number | Solids | GCD 10% | GCD 50% | GCD 90% | GCD % < 335°C |
|-------------|---------------|-----------|----------------------|-------------------|------------|------------------|--------------|-----------|-----------|-----------|-----------|---------------|
| | mm/dd/yy | | | °F/°C | ppm | cSt | mg/KOH/ g | %wt | °F/°C | °F/°C | °F/°C | % |
| 03/16/18 | 04/02/18 | 0m | | 244 / 118 | 7.3 | 25.0 | 0.007 | 0.031 | 660 / 349 | 803 / 428 | 917 / 491 | 7.96 |
| 01/12/18 | 01/26/18 | 0m | | 266 / 130 | 0.00 | 27.8 | 0.2 | 0.018 | 671 / 355 | 797 / 425 | 906 / 486 | 6.64 |
| 11/04/17 | 11/22/17 | 0m | | 248 / 120 | 9.1 | 27.3 | 0.03 | 0.031 | 632 / 333 | 796 / 424 | 893 / 478 | 9.74 |
| 10/04/17 | 10/17/17 | 0m | | 223 / 106 | 15.1 | 23.5 | 0.044 | 0.036 | 652 / 344 | 798 / 426 | 911 / 488 | 8.37 |
| 05/20/17 | 06/05/17 | 0m | NORTH HEAT EXCHANGER | 266 / 130 | 29.5 | 24.1 | 0.028 | 0.061 | 666 / 352 | 802 / 428 | 915 / 490 | 7.16 |
| 09/22/16 | 10/04/16 | 0m | NORTH HEAT EXCHANGER | 266 / 130 | 11.2 | 26.2 | 0.02 | 0.040 | 625 / 330 | 785 / 419 | 886 / 475 | 10.14 |
| | Baseline Data | | 448 / 231 | | 35.20 | .1 | | 712 / 378 | 810 / 432 | 910 / 488 | 1.75 | |

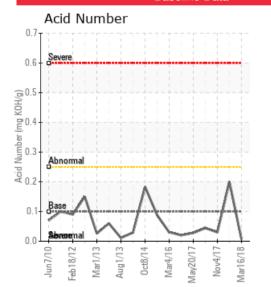



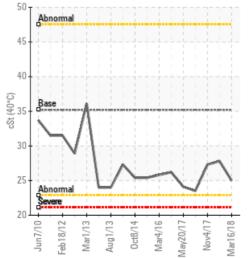




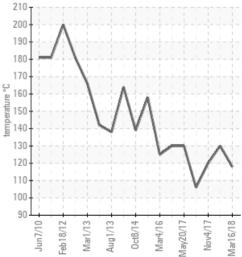




Elemental anaysis results (above) in parts per million (ppm). [10,000 ppm = 1.0%]

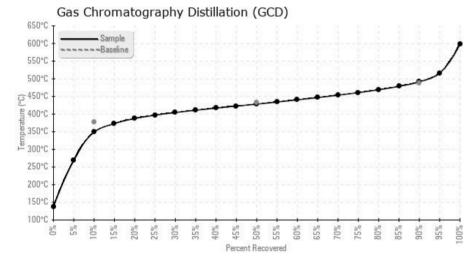

% Boiling < 335°C

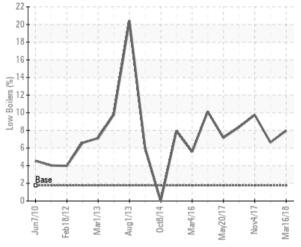

| | Historical Comments |
|----------|---|
| 01/12/18 | COC IS IMPROVING. It looks like new oil was added as GCD IS IMPROVING. (GCD) 10% Distillation Point improved. Resample in 2 months. COC Flash Point is severely low. |
| 11/04/17 | Adding new oil could bring flash point up significantly. Check for heating consistency. COC Flash Point is severely low. (GCD) 10% Distillation Point is abnormally low. (GCD) % < 335°C is marginally high. |
| 10/04/17 | Resample to confirm results. Let about 1 gallon of oil purge before taking sample. COC Flash Point is severely low. (GCD) % < 335°C is marginally high. (GCD) 10% Distillation Point is marginally low. |
| 05/20/17 | COC Flash Point is severely low. Water has increased. If some new oil can be added to the system it will help increase COC flash point. Make sure to let sufficient amount of oil purge from sample point before collecting sample. COC Flash Point is severely low. |
| 09/22/16 | COC Flash Point is severely low. (GCD) 10% Distillation Point is abnormally low. (GCD) % < 335°C is marginally high. (GCD) 90% Distillation Point is marginally low. Resample in 3 months. COC Flash Point is severely low. (GCD) 10% Distillation Point is abnormally low. (GCD) % < 335°C is marginally high. (GCD) 90% Distillation Point is marginally low. |

Petro-Canada makes no representation or warranty of any kind, either express or implied, as to the accuracy or completeness of the analysis and assumes no responsibility and shall have no liability whatsoever with respect to such analysis, or a party's use of it. Petro-Canada is a division of HollyFrontier Corporation.