

WANSON BH/INC 1200

Customer: PTRHTF40127

Dalco Foods B.V Everdenberg 50

Oosterhout, 4902TT Netherlands

Attn: Wilbert Snijers

Tel:

E-Mail: w.snijers@klt.nl

System Information

System Volume: 4200 gal

Bulk Operating Temp: 518F / 270C

Heating Source:

Blanket:

Fluid: PETRO CANADA PURITY FG HEAT TRANSFER FLUID

Make: WANSON


Sample Information

Lab No: 02256576 Analyst: Philip Riley Sample Date: 12/03/18 Received Date: 12/11/18 Completed: 12/13/18

Recommendation: FLuid looks in good condition with respect to expected parameters. Some more clarity required on the unit age, time on oil etc as this is not consistent with previous samples. Based on result set the fluid is fit for further use and should be sampled at the next scheduled interval

Comments:

Sample Date	Received Date	Fluid Age		Sample Location	Flash Point (COC)	Water (KF)	Viscosity (40°C)	Acid Number	Solids	GCD 10%	GCD 50%	GCD 90%	GCD % < 335°C	
	mm/dd/yy				°F/°C	ppm	cSt	mg/KOH/	%wt	°F/°C	°F/°C	°F/°C	%	
12/03/18	12/11/18	0y			417 / 214	17.5	30.0	0.414	0.067	702 / 372	801 / 427	897 / 481	3.65	
08/08/18	08/14/18	Зу			406 / 208	36.7	32.6	0.38	0.048	713 / 378	801 / 427	895 / 480	1.88	
05/08/18	05/11/18	Зу			432 / 222	36.1	34.2	0.44	0.053	688 / 364	793 / 423	907 / 486	4.98	
		D !!	D .		450 / 007		07.40	0.00		704 / 000	007 / 404	000 / 470	4 =	
Baseline Data Acid Number			Data	459 / 237 37.12 Viscosity @ 40°C					0.90 721 / 383 807 / 431 892 / 478 1.5					
				\/iccocity	@ 40°C				- п	Daniel Daniel	L (OC)			
16	lumber			Viscosity	@ 40°C				居 235 т ¬	esh Poin	t.(°C)			
1.6 Severe	umber		1	Severe	@ 40°C				235	lash Poin	t (°C)			
1.6 Severe				55 T :	@ 40°C					lesh Poin	t (°C)			
1.6 Severe				Severe	@ 40°C				235	lesh Poin	t (°C)			
1.6 Severe				Severe Solution Severe Solution Severe Sever	@ 40°C				235	lesh Poin	t.(<u>.°C.)</u>			
1.6 Severe				Severe Solution Severe Solution Severe Sever	@ 40°C				235	esh Poin	t()			
1.6 Severe				Severe Abnormal	@ 40°C			0 000	235	esh Poin	()			
1.6 Severe				Severe Abnormal 50 45 45 Base 3 35	@ 40°C			A constant of the constant of	235 T	esh Poin	L. (.°.C.)			
1.4 Abnormal				Severe Solution Severe Solution Severe Sever	@ 40°C			O contractor	235	lesh Poin	L. (()			
1.4 Severe 1.4 1.2 - Abnormal Base 0.8 0.6				Severe Abnormal 50 45 45 Base 3 35	@ 40°C			O contract	235 - 230 - 225 - 220 - 215 - 210 -	esh Poin	L. ((Co.)			
1.4 Severe 1.4 Abnormal				Severe Abnormal 45 Base 30 Abnormal Severe	@ 40°C			Co constraints of the constraint	235 - 230 - 225 - 220 - 215 - 210 - 205 - 200 -	lesh Poin	Lan((2000))			
1.4 Severe 1.4 Abnormal 1.2 - Abnormal Base 0.8 0.4 0.4			Dec3/18	55 Severe Abnormal 50 40 Base 30 35	@ 40°C			Dec3/18 +	235 - 230 - 225 - 220 - 220 - 210 - 210 - 210 - 210 - 210 - 205 -		Aug8/18		Dec3/18	

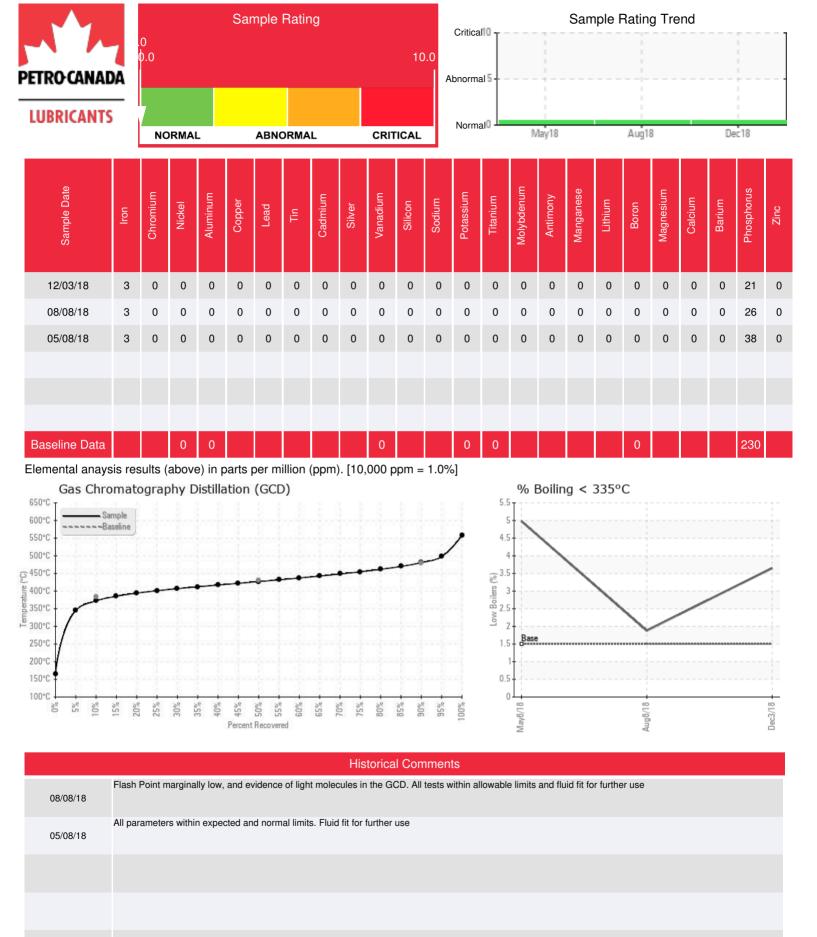

Petro-Canada makes no representation or warranty of any kind, either express or implied, as to the accuracy or completeness of the analysis and assumes no responsibility and shall have no liability whatsoever with respect to such analysis, or a party's use of it. Petro-Canada is a division of HollyFrontier Corporation.