




[SARAH] SARAH - THERMAL OIL SYSTEM CIRCULATING OIL


| Customer: PTRHTF30015 | System Information | Sample Information |
|--|--|---|
| Transport Desgagnes Inc. 21 Marche Champlain Suite 100 Quebec City, QC G1K 8Z8 Canada Attn: Sonia Desmarais Tel: (418)692-1000 E-Mail: | System Volume: 6000 ltr Bulk Operating Temp: 392F / 200C Heating Source: Blanket: Fluid: PETRO CANADA PETRO-THERM Make: AALBORG | Lab No: 02268422 Analyst: Claude Bureau Sample Date: 01/31/19 Received Date: 02/19/19 Completed: 02/28/19 |

Recommendation: Le fluide est en condition d'opération. SVP échantillonner à l'intervalle prévue pour analyse (6 à 12 mois).

Comments: Aucune trace d'usure. Aucune trace de contamination. Rien d'anormal à signaler



| Sample Date | Received Date | Fluid Age | Sample Location | Flash Point (COC) | Water (KF) | Viscosity (40°C) | Acid Number | Solids | GCD 10% | GCD 50% | GCD 90% | GCD % < 335°C |
|---------------|---------------|-----------|-----------------|-------------------|------------|------------------|-------------|--------|-----------|-----------|-----------|---------------|
| | mm/dd/yy | | | °F/°C | ppm | cSt | mg/KOH/g | %wt | °F/°C | °F/°C | °F/°C | % |
| 01/31/19 | 02/19/19 | 11y | PUMP DISCHARGE | 435 / 224 | 28.9 | 34.9 | 0.061 | 0.044 | 701 / 372 | 794 / 423 | 888 / 476 | 1.57 |
| 08/05/18 | 08/23/18 | 1y | MAIN CIRC PUMP | 430 / 221 | 42.8 | 34.9 | 0.02 | 0.032 | 720 / 382 | 810 / 432 | 906 / 486 | 0.27 |
| 02/13/18 | 02/15/18 | 0y | | | | 34.6 | 0.01 | | | | | |
| 01/26/18 | 02/07/18 | 10y | | 428 / 220 | 31.4 | 34.6 | 0.02 | 0.042 | 705 / 374 | 792 / 422 | 885 / 474 | 0.13 |
| 08/15/17 | 09/15/17 | 10y | | | | 34.6 | 0.022 | | | | | |
| 12/23/16 | 01/10/17 | 0y | PUMP DISCHARGE | 435 / 224 | 38.9 | 35.0 | 0.03 | 0.039 | 721 / 383 | 816 / 436 | 910 / 488 | 0.79 |
| Baseline Data | | | | 433 / 223 | | 34.2 | 0.03 | | 720 / 382 | 817 / 436 | 900 / 482 | 1.00 |

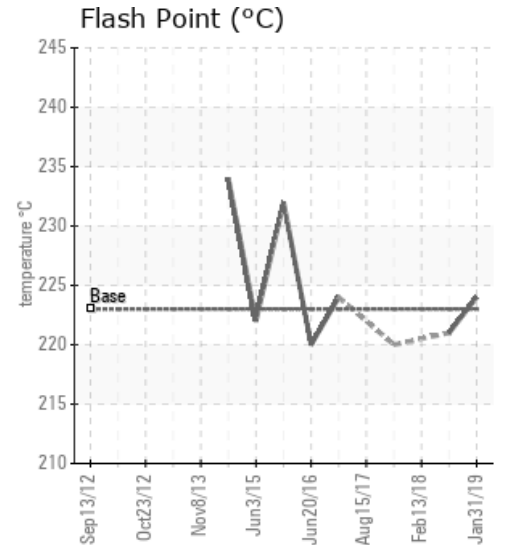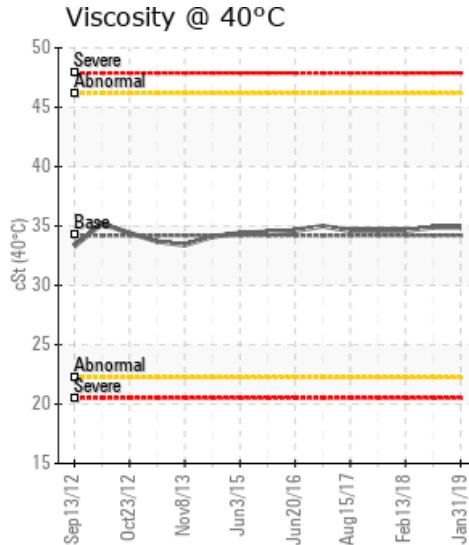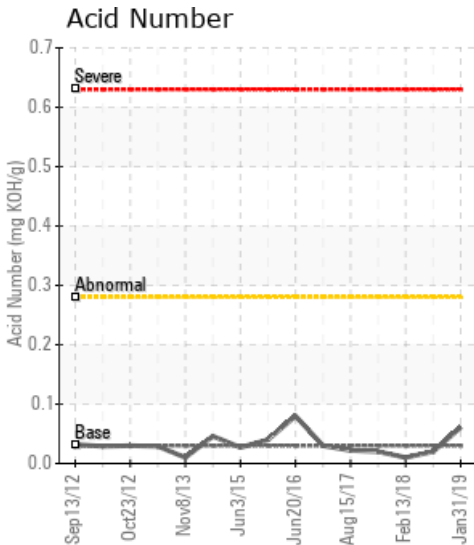

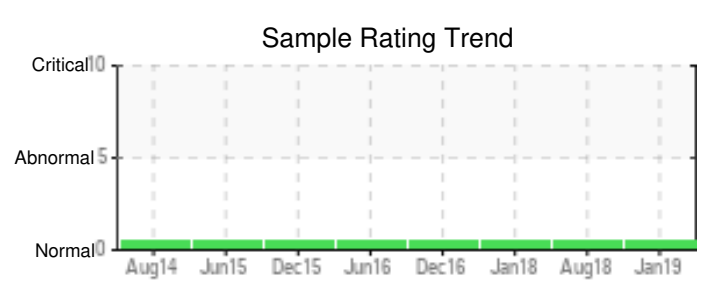

| Sample Date | Iron | Chromium | Nickel | Aluminum | Copper | Lead | Tin | Cadmium | Silver | Vanadium | Silicon | Sodium | Potassium | Titanium | Molybdenum | Antimony | Manganese | Lithium | Boron | Magnesium | Calcium | Barium | Phosphorus | Zinc |
|----------------------|------|----------|--------|----------|--------|------|-----|---------|--------|----------|---------|--------|-----------|----------|------------|----------|-----------|---------|-------|-----------|---------|--------|------------|------|
| 01/31/19 | 7 | 0 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 35 | 0 | 7 | 4 |
| 08/05/18 | 9 | 0 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 7 | 4 |
| 02/13/18 | 10 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 8 | 4 |
| 01/26/18 | 16 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 7 | 6 |
| 08/15/17 | 6 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 24 | 0 | 6 | 3 |
| 12/23/16 | 10 | 0 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 6 | 5 |
| Baseline Data | | | 0 | 0 | | | | | | 0 | | | 0 | 0 | | | | | 0 | | | | 0 | |

Elemental analysis results (above) in parts per million (ppm). [10,000 ppm = 1.0%]

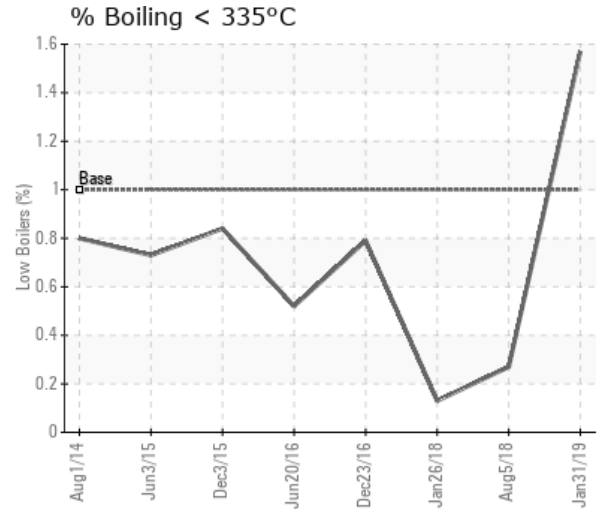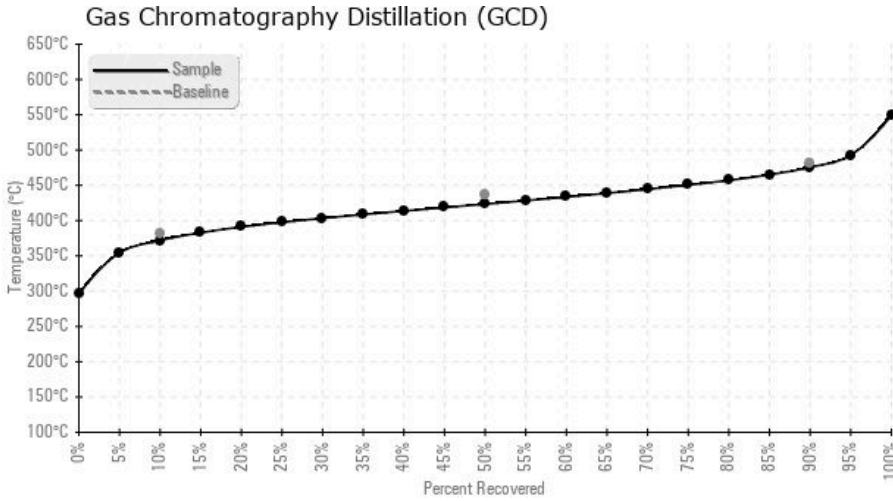

| Historical Comments | |
|---------------------|---|
| 08/05/18 | Malgré la contamination à l'eau. L'huile est en bonne état et peut demeurer en service pour le moment. Nous recommandons de soumettre un nouvel échantillon après 12 mois d'opération. Aucuns métaux d'usures détectés. Présence d'eau détectée à 42.8 PPM. Rien à signaler. |
| 02/13/18 | Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service. |
| 01/26/18 | All parameters are normal. The Petro-Therm fluid is in very good condition and can stay in service until next sampling. We recommend a new sample in 12 months. |
| 08/15/17 | Resample at the next service interval to monitor. Lubritest recommends using HTTFL sample kits for heat transfer fluids. Please contact us at 1-800-268-2131 and provide a purchase order for \$245 + HST in order to conduct additional testing (boiling points @ 10%, 50%, and 90%, percent boiling < 335°C, and solids) to determine the suitability for continued use. All component wear rates are normal. ISO Cleanliness Code (ISO 4406:1999): 24/20/13; Cumulative particle counts >4µm = 116043, >6µm = 8805, >14µm = 67, >21µm = 10, >38µm = 0, >71µm = 0. There is no indication of any contamination in the component (unconfirmed). The AN level is acceptable for this fluid. The condition of the fluid is acceptable for the time in service. |
| 12/23/16 | All parameters are normal. The Petro-Therm fluid is in very good condition and can stay in service until next sampling. We recommend a new sample in 12 months. |

Petro-Canada makes no representation or warranty of any kind, either express or implied, as to the accuracy or completeness of the analysis and assumes no responsibility and shall have no liability whatsoever with respect to such analysis, or a party's use of it. Petro-Canada is a division of HollyFrontier Corporation.