

YONG SHUN PU U-9 U-10

Customer: PTRHTF60007

CANADIAN RESOURCES INC 2F 71 CHONG CHING NORTH ROAD S

C 3

TAIPEI, TAIWAN, PROVINC

Attn: HUGO CHENG Tel: (886)225-853509

E-Mail: roychen1018@hotmail.com

System Information

System Volume: 13120 ltr

Bulk Operating Temp: 419F / 215C

Heating Source:

Blanket:

Fluid: PETRO CANADA CALFLO HTF

Make:


Sample Information


Lab No: 02329281 Analyst: Philip Riley Sample Date: 12/18/19 Received Date: 12/30/19

Completed: 01/20/20

Recommendation: All parameters test within normal range. Fluid fit fir further use. Please re-sample again in 12 months. Please note that there are no hours/month quoted. For a thorough diagnosis please include working time on the fluid


Comments:

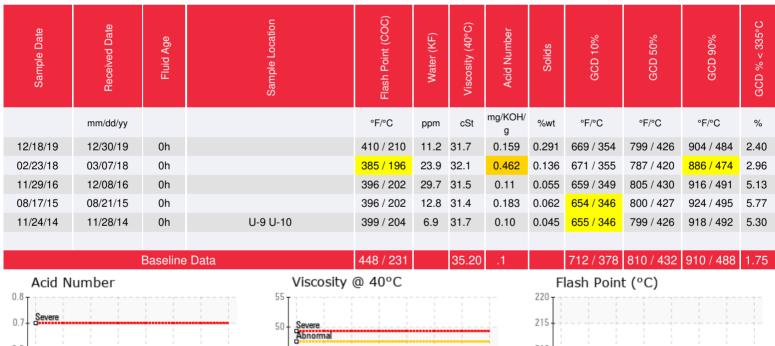

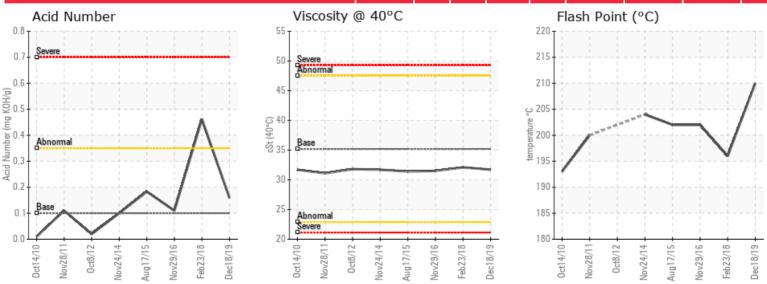



Elemental analysis results (above) in parts per million (ppm). [10,000 ppm = 1.0%]

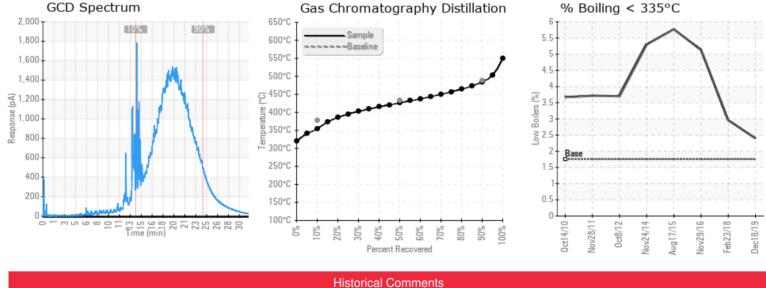

The current fluid has normal viscosity, flash point. However, the TAN and solid content are higher than normal because of the minor oxidation. Please take one sample in 6 months to monitor the conditions. The fluid hours are not reported, which definitely limit our interpretation. Please inform Yutong Gao at Petro-Canada for the detailed fluid hours. Acid Number (AN) is abnormally high. COC Flash Point is marginally low. (GCD) 90% Distillation Point is marginally low. The current fluid has adequate viscosity, flash point, acid number, distillation points, water and the solid content. The fluid is OK for continual run and please take a sample in 12 months to monitor the conditions. The current fluid has normal viscosity, GCD, TAN, solid and water. This fluid is suitable for further use. Please take one sample in one year to monitor the conditions. Please remember to provide the total fluid working hours when you send the future samples. The current fluid has normal viscosity, TAN, flash point and particle level. It is suitable for further use. The lower 10% GCD is due to the mild thermal cracking. Please take one sample in 6 months to monitor the conditions. (GCD) 10% Distillation Point is marginally low.

Petro-Canada makes no representation or warranty of any kind, either express or implied, as to the accuracy or completeness of the analysis and assumes no responsibility and shall have no liability whatsoever with respect to such analysis, or a party's use of it. Petro-Canada is a division of HollyFrontier Corporation.