


VTA HOT OIL PUMP

Customer: PTRHTF10004	System Information	Sample Information			
ADM VITAMIN E PLANT	System Volume: 1800 gal	Lab No: 02544416			
3700 EAST DIVISION STREET	Bulk Operating Temp: 650F / 343C	Analyst: Yvette Trzcinski			
DECATUR, IL 62526 USA	Heating Source:	Sample Date: 02/22/23			
Attn: Rick Cluck	Blanket:	Received Date: 03/10/23			
Tel: (217)451-7770	Fluid: PETRO CANADA PURITY FG HEAT TRANSFER FLUID	Completed: 03/16/23			
E-Mail: ricky.cluck@adm.com	Make: AMERICAN HEATING	Yvette Trzcinski			
		yvette.trzcinski@HFSinclair.com			


Recommendation: Flash point and viscosity have increased slightly since the last sample but are both still very low as is the GCD % <335 C which all point to thermal degradation cracking the oil creating low viscosity molecules or low boilers consider sweetening the system with new oil at least a minimum of 30% Resample in 3 - 6 months

Comments: (GCD) 10% Distillation Point is severely low. COC Flash Point is severely low. Visc @ 40°C is severely low. (GCD) % < 335°C is abnormally high.

Sample Date	Received Date	Fluid Age	Sample Location	Flash Point (COC)	Water (KF)	Viscosity (40°C)	Acid Number	Solids	GCD 10%	GCD 50%	GCD 90%	GCD % < 335°C
	mm/dd/yy			°F/°C	ppm	cSt	mg/KOH/ g	%wt	°F/°C	°F/°C	°F/°C	%
02/22/23	03/10/23	0.0y		306 / 152	22.2	20.8	0.11	0.089	581 / 305	794 / 424	907 / 486	12.54
05/02/22	05/10/22	0.0y		280 / 138	13.7	19.6	0.07	0.030	585 / 307	792 / 422	910 / 488	12.57
07/23/21	08/04/21	0.0y		255 / 124	14.4	17.4	0.08	0.050	506 / 263	777 / 414	884 / 473	18.00
03/03/21	03/09/21	0.0y	B3 hot oil pump	262 / 128	9.4	16.5	0.09	0.046	519 / 271	777 / 414	893 / 478	18.84
11/25/20	12/08/20	0.0y	Pump	280 / 138	10.1	17.3	0.07	0.082	514 / 268	780 / 416	892 / 478	17.70

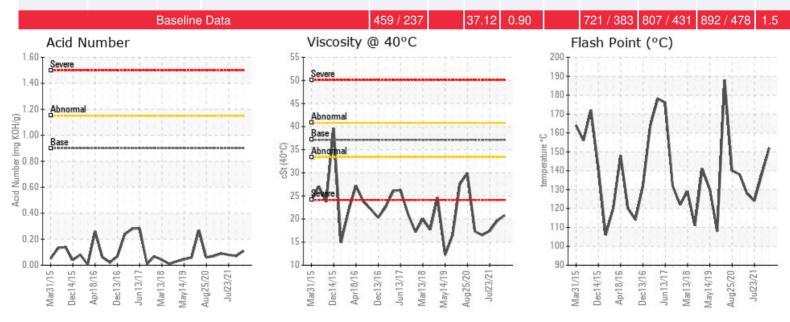

Report ID: [02544416] (Generated: 03/16/2023 07:22:05) - Page 1 - Copyright 2023 Wearcheck Inc. All Rights Reserved.

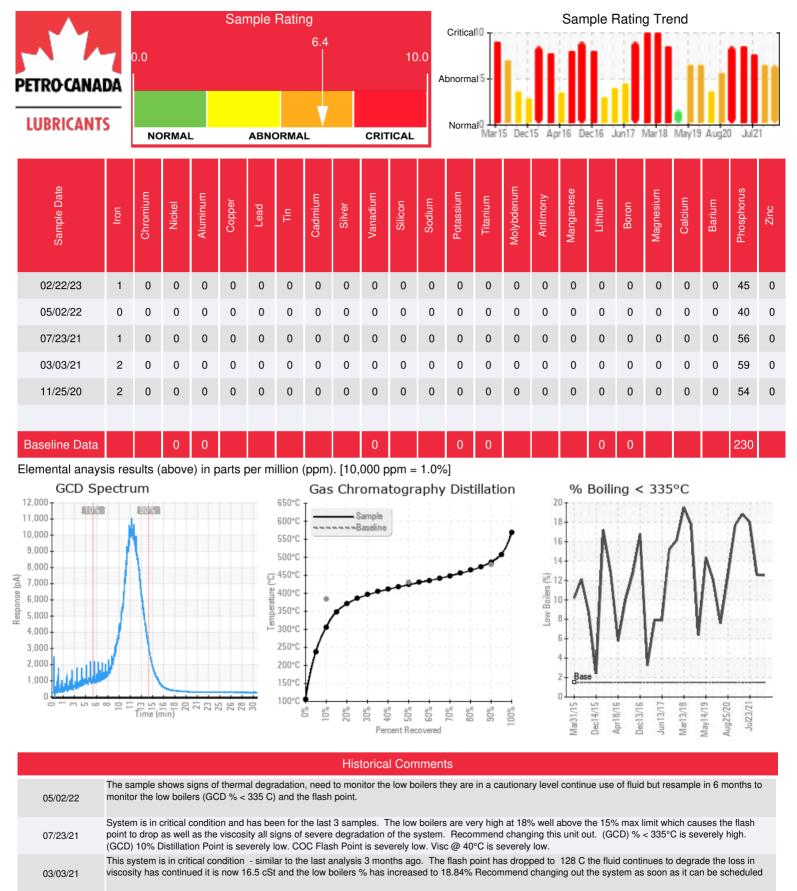

System in critical condition. Flash point very low at 138 C. Viscosity is also very low at 17.3 Cst and will affect heat transfer and lubrication of system. The low boilers have passed the 15% mark at 17.7%. This system should be scheduled to be changed in the next 30 days. (GCD) % < 335°C is severely high. (GCD) 10% Distillation Point is severely low. COC Flash Point is severely low. Visc @ 40°C is severely low.

Petro-Canada makes no representation or warranty of any kind, either express or implied, as to the accuracy or completeness of the analysis and assumes no responsibility and shall have no liability whatsoever with respect to such analysis, or a party's use of it. Petro-Canada is a division of HollyFrontier Corporation.