



Recommendation: Sample results indicate that the fluid is in suitable condition for continued service. Resample in 12 months.

Comments:

Sample Date	Received Date	Fluid Age	Sample Location	Flash Point (COC)	Water (KF)	Viscosity (40°C)	Acid Number	Solids	GCD 10%	GCD 50%	GCD 90%	GCD % < 335°C
	mm/dd/yy			°F/°C	ppm	cSt	mg/KOH/ g	%wt	°F/°C	°F/°C	°F/°C	%
03/07/23	03/31/23	0.0y		432 / 222	14.2	34.8	0.01	0.026	719 / 382	812 / 434	909 / 487	1.93
03/28/22	06/02/22	0.0y	pump discharge	446 / 230	4.6	34.7	0.01	0.053	723 / 384	814 / 434	911 / 489	1.47
03/03/21	03/22/21	5.0y	differential flange	435 / 224	17.6	34.7	0.02	0.034	722 / 383	813 / 434	931 / 500	0.11
02/16/20	03/23/20	5.0y	RETURN LINE	468 / 242	6.9	35.3	0.060	0.072	747 / 397	822 / 439	924 / 495	0.00

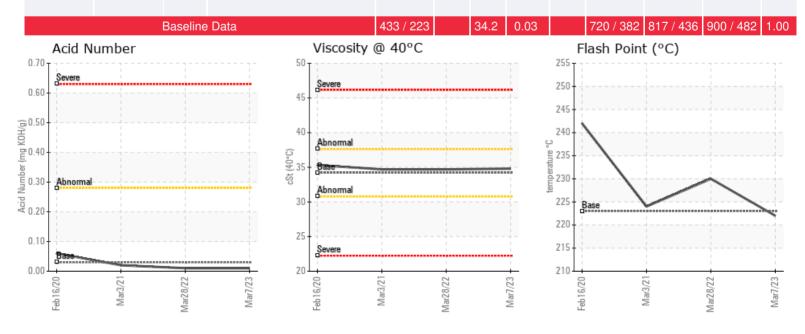

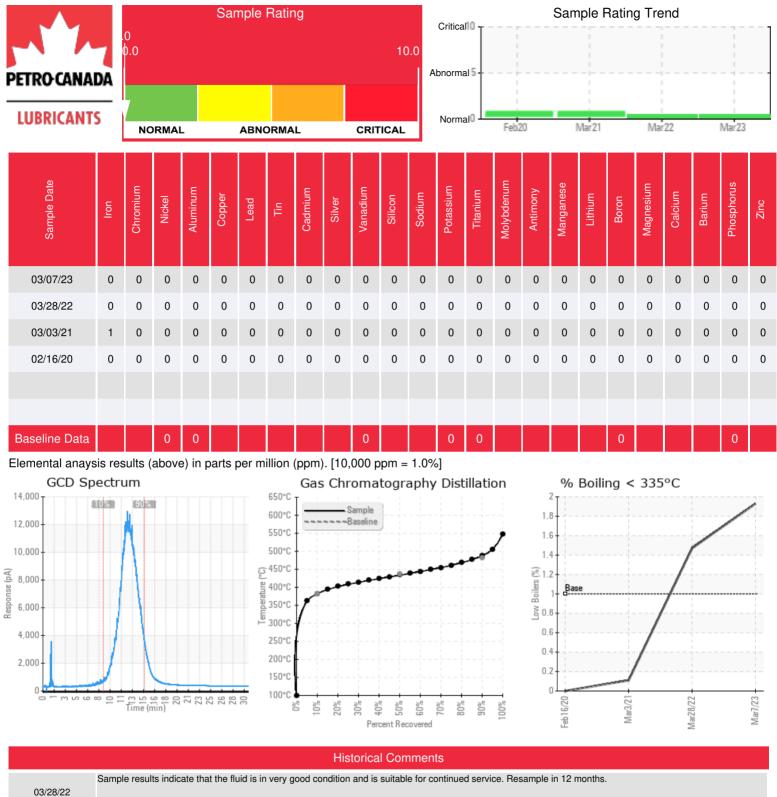

03/28/22							
03/03/21	Fluid remains in very good condition. Suggest submitting samples annually to proactively monitor fluid condition. (GCD) 90% Distillation Point is slightly elevated.						
02/16/20	Distallation (GCD) at 90% is marginally high indicating the presence of of some heavier ends. Otherwise fluid looks to be in good shape. With no history we cannot do trend analysis. Resample in 6 months. Verify that the temperatures and volumes on all 3 systems are the same as reported. (GCD) 90% Distillation Point is marginally high.						

Petro-Canada makes no representation or warranty of any kind, either express or implied, as to the accuracy or completeness of the analysis and assumes no responsibility and shall have no liability whatsoever with respect to such analysis, or a party's use of it. Petro-Canada is a division of HollyFrontier Corporation.