

LIEBHERR

CONSTRUCTION EQUIPMENT



LIEBHERR LH60M 141098-1217 - Hydraulic System

Sample No: LH0291154

Oil Type: {unknown}



JOHN ZUBICK LTD.
 105 CLARKE ROAD
 LONDON, ON
 CA N5W 5C9
 Contact: John French
 honeil@zubicks.com
 T: (519)451-5470
 F: (519)451-4245



Sample Information

Sample Number	LH0291154	LH0284997	LH0277799	LH0261813
Sample Date	13 May 2024	22 Feb 2024	04 Dec 2023	26 May 2023
Machine Hours	3286	2811	0	1399
Oil Hours	0	0	0	0
Oil Changed	Not Changd	Not Changd	N/A	Not Changd
Sample Status	NORMAL	NORMAL	ATTENTION	NORMAL



Oil Condition

Visc @ 40°C	cSt	42.3	42.1	42.3	43.0



Contamination

Water	%	NEG	NEG	NEG	NEG
Particles >4µm		2590	3045	20366	10113
Particles >6µm		722	1027	3885	2074
Particles >14µm		53	92	80	63
ISO 4406:1999 (c)		19/17/13	19/17/14	22/19/13	21/18/13
Silicon	ppm	3	4	4	3
Sodium	ppm	3	3	3	2
Potassium	ppm	<1	1	0	0



Wear Metals

Iron	ppm	12	12	11	10
Copper	ppm	7	6	5	3
Lead	ppm	<1	<1	1	<1
Tin	ppm	0	0	0	0
Aluminum	ppm	<1	1	<1	<1
Chromium	ppm	2	2	<1	<1
Molybdenum	ppm	0	0	0	0
Nickel	ppm	0	0	0	0
Titanium	ppm	0	0	0	0
Silver	ppm	0	0	<1	0
Manganese	ppm	<1	0	0	<1
Vanadium	ppm	0	0	0	0



Additives

Calcium	ppm	1233	1245	1198	1325
Magnesium	ppm	5	5	4	4
Zinc	ppm	692	692	697	697
Phosphorus	ppm	597	618	580	673
Barium	ppm	<1	0	<1	0
Boron	ppm	<1	<1	<1	<1

Diagnosis


Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The condition of the oil is acceptable for the time in service.

Depot: JOHLON
 Unique No: 5776460
 Signed: Wes Davis
 Report Date: 15 May 2024




Graphs


Ferrous Alloys

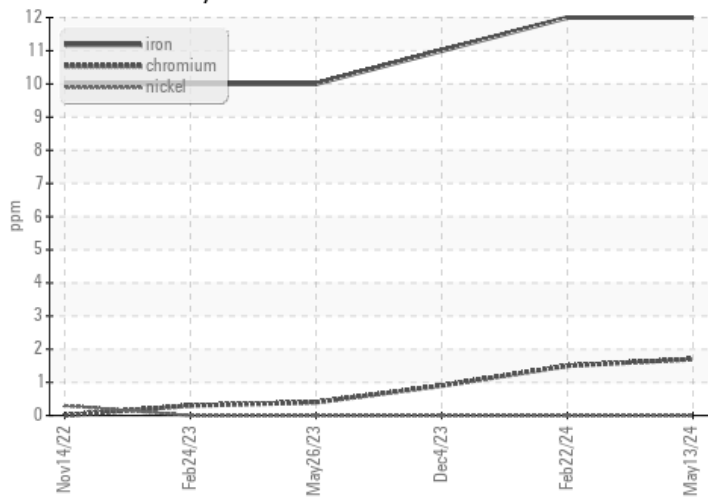

Non-ferrous Metals

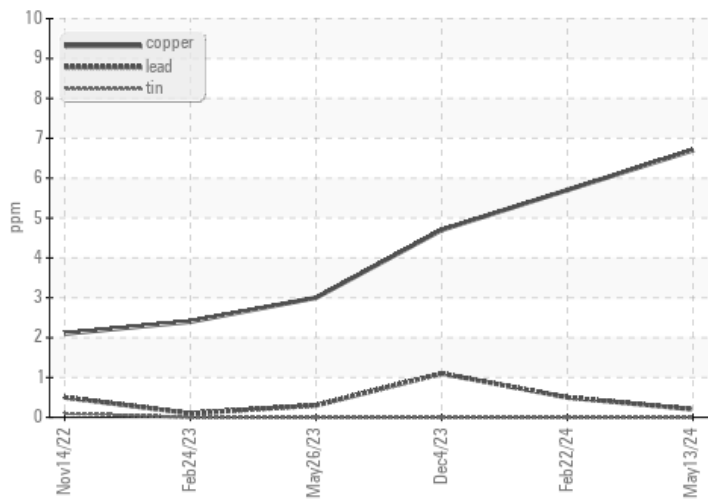

Viscosity @ 40°C

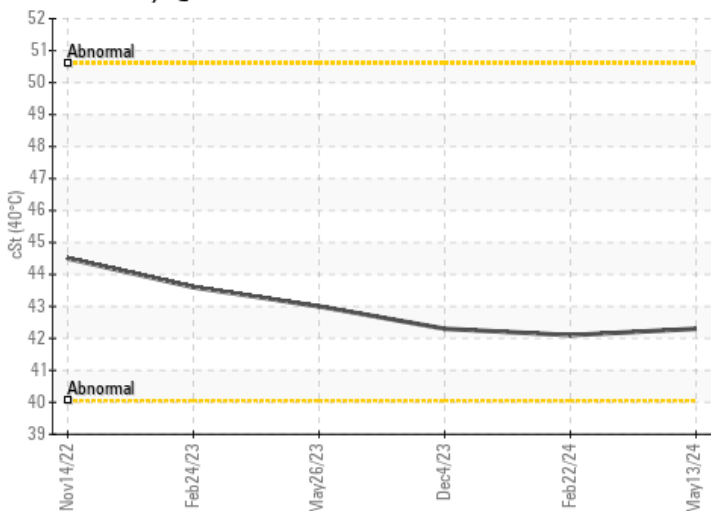

Particle Count

