

# LIEBHERR

## CONSTRUCTION EQUIPMENT



### LIEBHERR LH50 1216-121548 - Rear Left Wheel Hub

Sample No: LH0243393

Oil Type: GEAR OIL SAE 80W90



#### SAMPLE INFORMATION

Sample Number	LH0243393	LH0263858	LH0236122	---
Sample Date	05 Oct 2023	18 Jul 2023	20 Jan 2023	---
Machine Hours	2969	2422	1172	---
Oil Hours	0	0	0	---
Oil Changed	Changed	Changed	Changed	---
Sample Status	NORMAL	NORMAL	NORMAL	---

**AMERICAN STATE EQUIPMENT CO.**  
 2400 NORTH 14TH AVENUE  
 WAUSAU, WI  
 US 54401  
 Contact: CHRIS BARTNIK  
 cbartnik@amstate.com  
 T: (715)675-6900  
 F: (715)675-9748



#### OIL CONDITION

Visc @ 40°C	cSt	122	129	131	---
-------------	-----	-----	-----	-----	-----



#### CONTAMINATION

Silicon	ppm	<1	2	4	---
Sodium	ppm	2	4	<1	---
Potassium	ppm	0	0	2	---

#### Diagnosis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.



#### WEAR METALS

Iron	ppm	8	22	26	---
Copper	ppm	2	7	7	---
Lead	ppm	0	0	0	---
Tin	ppm	0	0	0	---
Aluminum	ppm	0	<1	0	---
Chromium	ppm	0	0	<1	---
Molybdenum	ppm	0	<1	<1	---
Nickel	ppm	0	0	0	---
Titanium	ppm	<1	0	0	---
Silver	ppm	0	0	0	---
Manganese	ppm	0	<1	<1	---
Vanadium	ppm	0	0	0	---



#### ADDITIVES


Calcium	ppm	43	39	61	---
Magnesium	ppm	2	8	5	---
Zinc	ppm	11	27	33	---
Phosphorus	ppm	866	842	978	---
Barium	ppm	0	0	0	---
Boron	ppm	<1	2	6	---

Depot: LEC0008  
 Unique No: 10701564  
 Signed: Doug Bogart  
 Report Date: 20 Oct 2023




### GRAPHS

Ferrous Alloys

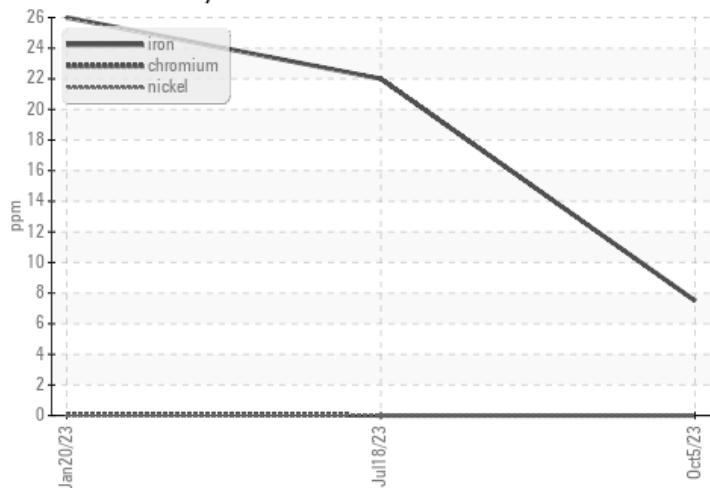

Non-ferrous Metals

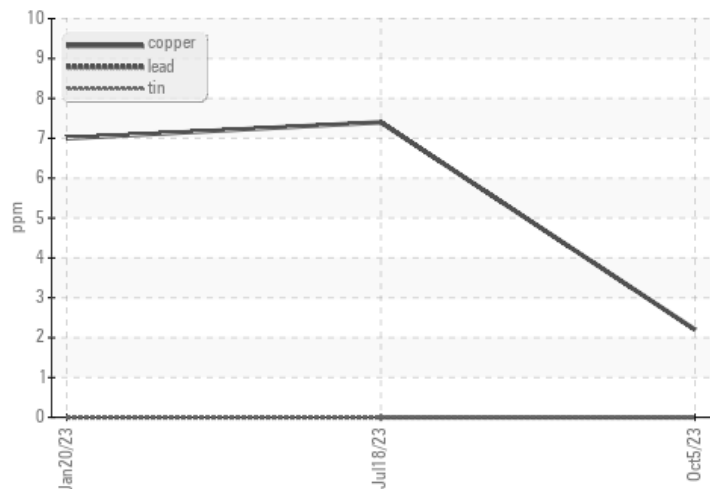

Viscosity @ 40°C

