

LIEBHERR

CONSTRUCTION EQUIPMENT



LIEBHERR LH50 142548-1216 - Rear Differential

Sample No: LH0272489

Oil Type: GEAR OIL SAE 80W90



AMERICAN STATE EQUIPMENT CO.
 2400 NORTH 14TH AVENUE
 WAUSAU, WI
 US 54401
 Contact: CHRIS BARTNIK
 cbartnik@amstate.com
 T: (715)675-6900
 F: (715)675-9748



SAMPLE INFORMATION

Sample Number	LH0272489	LH0254792	LH0243159	---
Sample Date	30 Oct 2023	14 Apr 2023	11 Jan 2023	---
Machine Hours	1993	1008	473	---
Oil Hours	0	0	0	---
Oil Changed	Changed	Changed	Changed	---
Sample Status	NORMAL	NORMAL	NORMAL	---



OIL CONDITION

Visc @ 40°C	cSt	124	130	153	---
-------------	-----	-----	-----	-----	-----



CONTAMINATION

Silicon	ppm	2	2	8	---
Sodium	ppm	2	1	3	---
Potassium	ppm	0	0	0	---



WEAR METALS

Iron	ppm	25	19	36	---
Copper	ppm	8	4	8	---
Lead	ppm	0	0	0	---
Tin	ppm	0	0	<1	---
Aluminum	ppm	0	0	<1	---
Chromium	ppm	0	0	<1	---
Molybdenum	ppm	0	<1	2	---
Nickel	ppm	0	0	0	---
Titanium	ppm	<1	<1	<1	---
Silver	ppm	0	0	0	---
Manganese	ppm	<1	1	1	---
Vanadium	ppm	0	<1	0	---



ADDITIVES

Calcium	ppm	36	43	189	---
Magnesium	ppm	12	7	2	---
Zinc	ppm	31	29	34	---
Phosphorus	ppm	701	882	1299	---
Barium	ppm	0	0	0	---
Boron	ppm	1	4	9	---

Diagnosis


Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

Depot: LEC0008
 Unique No: 10726899
 Signed: Sean Felton
 Report Date: 06 Nov 2023




GRAPHS

Ferrous Alloys

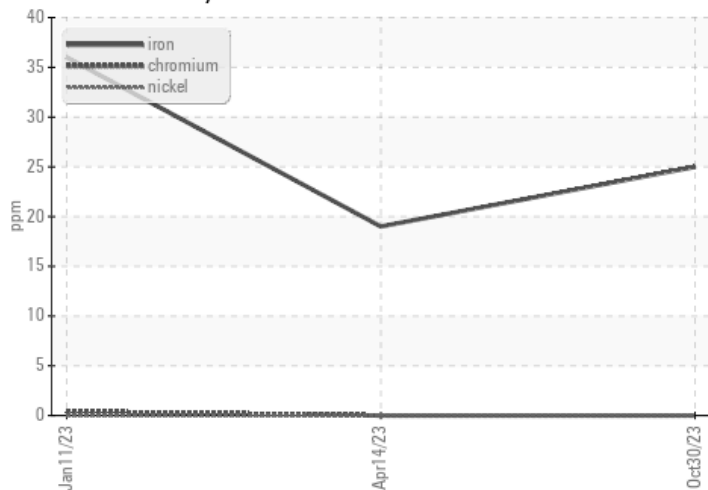

Non-ferrous Metals

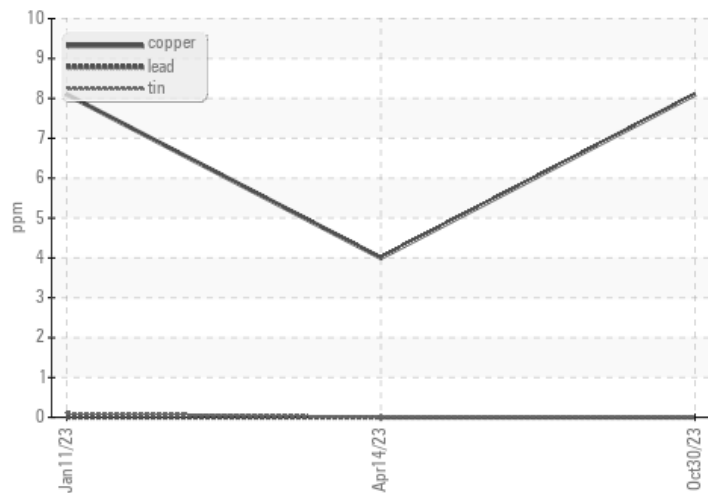

Viscosity @ 40°C

