

LIEBHERR

CONSTRUCTION EQUIPMENT



LIEBHERR LH40M 122207-1215 - Rear Differential

Sample No: LH0273220

Oil Type: GEAR OIL SAE 80W90



RECO EQUIPMENT INC.
 1040 REED DRIVE
 MONROE, OH
 US 45050
 Contact: Eric Hansen
 ehansen@recoequip.com
 T: (513)539-5255
 F: (513)539-5256



SAMPLE INFORMATION

Sample Number	LH0273220	LH0244667	---	---
Sample Date	08 Jan 2024	17 May 2023	---	---
Machine Hours	3977	2962	---	---
Oil Hours	0	0	---	---
Oil Changed	Changed	Changed	---	---
Sample Status	NORMAL	NORMAL	---	---



OIL CONDITION

Visc @ 40°C	cSt	192	183	---	---
-------------	-----	-----	-----	-----	-----



CONTAMINATION

Water	%	NEG	NEG	---	---
Silicon	ppm	1	2	---	---
Sodium	ppm	0	4	---	---
Potassium	ppm	1	1	---	---



WEAR METALS

Iron	ppm	20	29	---	---
Copper	ppm	12	9	---	---
Lead	ppm	0	0	---	---
Tin	ppm	<1	0	---	---
Aluminum	ppm	2	0	---	---
Chromium	ppm	<1	0	---	---
Molybdenum	ppm	<1	0	---	---
Nickel	ppm	0	0	---	---
Titanium	ppm	<1	0	---	---
Silver	ppm	0	0	---	---
Manganese	ppm	0	<1	---	---
Vanadium	ppm	0	0	---	---



ADDITIVES

Calcium	ppm	10	28	---	---
Magnesium	ppm	0	<1	---	---
Zinc	ppm	0	10	---	---
Phosphorus	ppm	2367	2447	---	---
Barium	ppm	0	0	---	---
Boron	ppm	1	1	---	---

Diagnosis

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.


All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

Depot: LEC0075
 Unique No: 10832929
 Signed: Wes Davis
 Report Date: 17 Jan 2024




GRAPHS

Ferrous Alloys

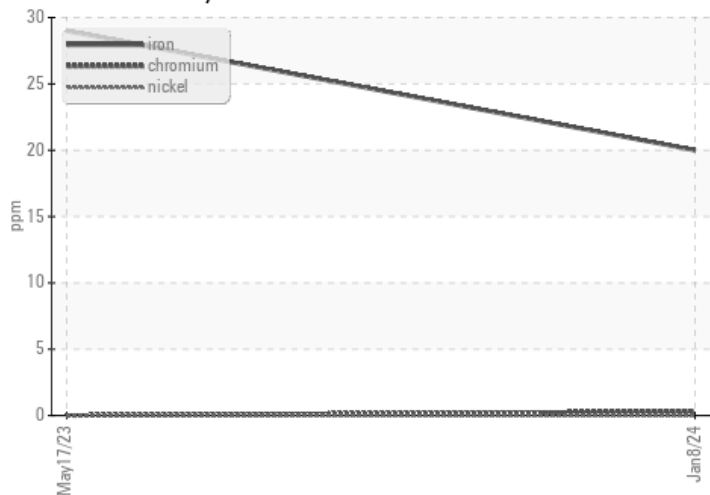

Non-ferrous Metals

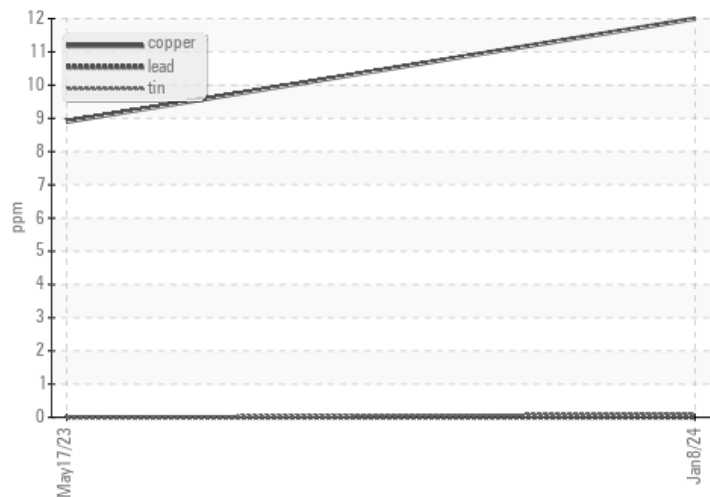

Viscosity @ 40°C

