

LIEBHERR

CONSTRUCTION EQUIPMENT



LIEBHERR TA230 146110-1513 - Front Axle

Sample No: LH0272025

Oil Type: LIEBHERR GEAR BASIC 90 LS



LIEBHERR EQUIPMENT SOURCE
 8200 FAYETTEVILLE ROAD
 RALEIGH, NC
 US 27603
 Contact: TAYLOR BLALOCK
 taylor.blalock@liebherr.com
 T: (757)718-0491
 F: (919)329-0084



Sample Information

Sample Number	LH0272025	---	---	---
Sample Date	23 Apr 2024	---	---	---
Machine Hours	1278	---	---	---
Oil Hours	1278	---	---	---
Oil Changed	N/A	---	---	---
Sample Status	ATTENTION	---	---	---



Oil Condition

Visc @ 40°C	cSt	58.1	---	---	---
-------------	-----	------	-----	-----	-----



Contamination

Water	%	NEG	---	---	---
Silicon	ppm	12	---	---	---
Sodium	ppm	12	---	---	---
Potassium	ppm	0	---	---	---



Wear Metals

Iron	ppm	154	---	---	---
Copper	ppm	52	---	---	---
Lead	ppm	0	---	---	---
Tin	ppm	3	---	---	---
Aluminum	ppm	2	---	---	---
Chromium	ppm	1	---	---	---
Molybdenum	ppm	0	---	---	---
Nickel	ppm	3	---	---	---
Titanium	ppm	0	---	---	---
Silver	ppm	0	---	---	---
Manganese	ppm	17	---	---	---
Vanadium	ppm	0	---	---	---



Additives

Calcium	ppm	3259	---	---	---
Magnesium	ppm	10	---	---	---
Zinc	ppm	1421	---	---	---
Phosphorus	ppm	1194	---	---	---
Barium	ppm	1	---	---	---
Boron	ppm	60	---	---	---

Diagnosis

Resample at the next service interval to monitor. Metal levels are typical for a new component breaking in. There is no indication of any contamination in the oil. The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.


Depot: LIEBHERRNC
 Unique No: 10996211
 Signed: Don Baldrige
 Report Date: 29 Apr 2024

Submitted By: TAYLOR BLALOCK




Graphs

Ferrous Alloys

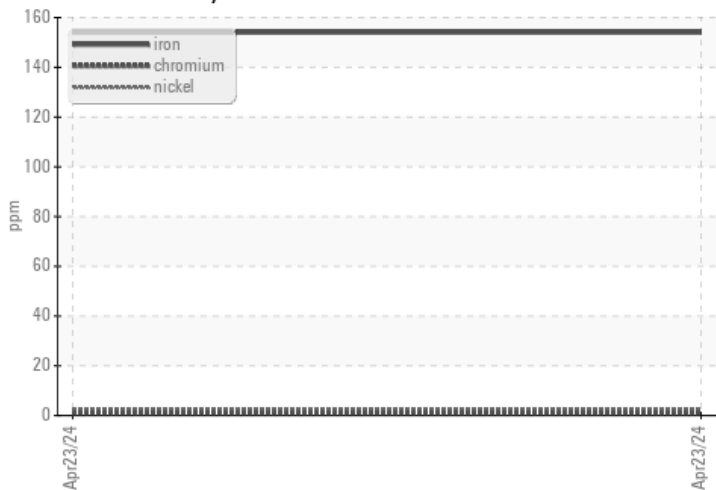

Non-ferrous Metals

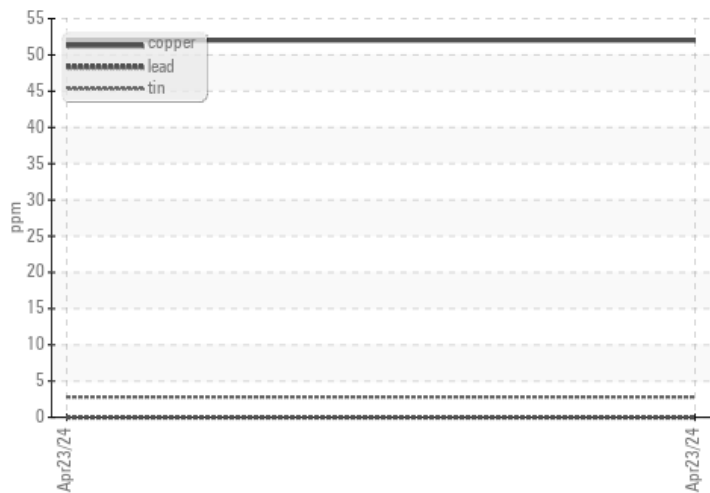

● Viscosity @ 40°C

