

# LIEBHERR

## CONSTRUCTION EQUIPMENT



### LIEBHERR PR736LGP 019189-1155 - Splitter Box

Sample No: LH0258413

Oil Type: GEAR OIL SAE 80W90



#### Sample Information

Sample Number	LH0258413	---	---	---
Sample Date	15 May 2024	---	---	---
Machine Hours	4090	---	---	---
Oil Hours	0	---	---	---
Oil Changed	N/A	---	---	---
Sample Status	NORMAL	---	---	---

**HEAVY MACHINES INC**  
 7651 THEODORE DAWES RD  
 THEODORE, AL  
 US 36582  
 Contact: DAVID MIANO  
 dmiano@heavymachinesinc.com  
 T: x:  
 F: x:



#### Oil Condition

Visc @ 40°C	cSt	● 135	---	---	---
-------------	-----	-------	-----	-----	-----



#### Contamination

Water	%	NEG	---	---	---
Silicon	ppm	● 2	---	---	---
Sodium	ppm	● 0	---	---	---
Potassium	ppm	● <1	---	---	---

#### Diagnosis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.



#### Wear Metals

Iron	ppm	● 13	---	---	---
Copper	ppm	● 3	---	---	---
Lead	ppm	● <1	---	---	---
Tin	ppm	● 0	---	---	---
Aluminum	ppm	● <1	---	---	---
Chromium	ppm	● <1	---	---	---
Molybdenum	ppm	● 4	---	---	---
Nickel	ppm	● 0	---	---	---
Titanium	ppm	<1	---	---	---
Silver	ppm	<1	---	---	---
Manganese	ppm	● <1	---	---	---
Vanadium	ppm	0	---	---	---



#### Additives


Calcium	ppm	● 75	---	---	---
Magnesium	ppm	● 2	---	---	---
Zinc	ppm	● 54	---	---	---
Phosphorus	ppm	● 428	---	---	---
Barium	ppm	● 0	---	---	---
Boron	ppm	● 2	---	---	---

**Depot:** HEATHE  
**Unique No:** 11046582  
**Signed:** Jonathan Hester  
**Report Date:** 30 May 2024




### Graphs

#### Ferrous Alloys

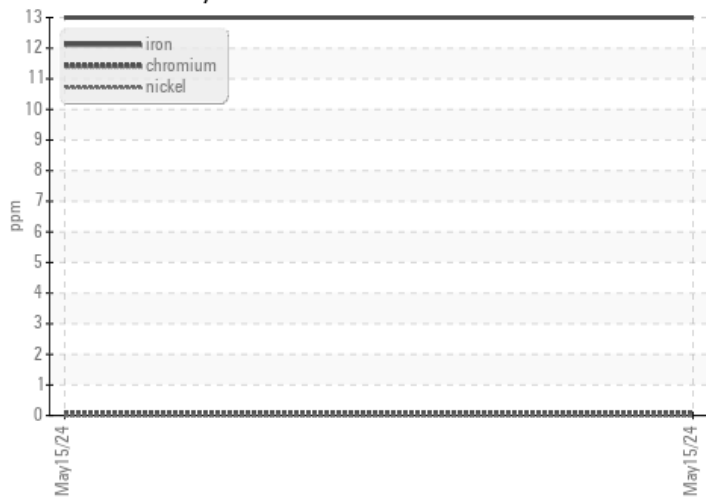

#### Non-ferrous Metals

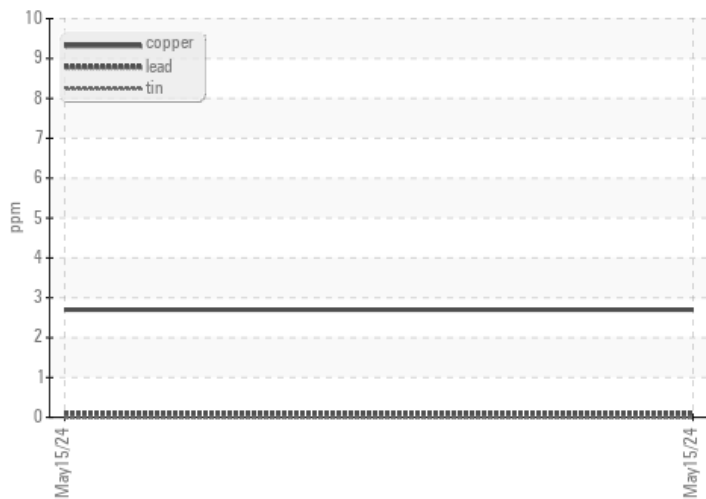

#### Viscosity @ 40°C

