

LIEBHERR

CONSTRUCTION EQUIPMENT



LIEBHERR LH50M 124550-1216 - Hydraulic System

Sample No: LH0278734

Oil Type: LIEBHERR HYDRAULIC HVI



COMBINED METAL INDUSTRIES-PUBLIC YARD
129 FENMAR DR
TORONTO, ON
CA M9L 1M7
Contact: Greg Sacher
gsacher@combinedmetal.com
T: (416)642-7262
F: x:



INFORMATION SUR L'ÉCHANTILLON

Numéro d'échant.	LH0278734	LH0270142	LH0270580	LH0265845
Date d'échant.	04 Mar 2024	27 Sep 2023	01 Aug 2023	11 Jun 2023
Heures de la Machine	14018	12565	11935	11340
Heures de l'huile	0	0	0	0
Huile changée	N/A	N/A	Not Changd	Not Changd
Statut de l'échant.	NORMAL	NORMAL	NORMAL	NORMAL



ÉTAT D'HUILE

Visc 40°C	cSt	41.4	41.3	41.3	41.2



CONTAMINATION

Eau	%	NEG	NEG	NEG	NEG
Particules >4µ		7915	5916	1428	7244
Particules >6µ		2048	2036	413	1542
Particules >14µ		128	179	35	66
ISO 4406:1999 (c)		20/18/14	20/18/15	18/16/12	20/18/13
Silicium	ppm	1	2	2	1
Sodium	ppm	<1	1	1	<1
Potassium	ppm	<1	0	<1	<1



MÉTAUX D'USURE

Fer	ppm	24	28	27	32
Cuivre	ppm	2	2	2	2
Plomb	ppm	<1	<1	<1	<1
Étain	ppm	0	0	0	0
Aluminium	ppm	<1	<1	<1	<1
Chrome	ppm	2	2	2	2
Molybdène	ppm	0	0	<1	0
Nickel	ppm	0	<1	<1	0
Titane	ppm	0	0	0	0
Argent	ppm	0	<1	0	0
Manganèse	ppm	0	0	<1	<1
Vanadium	ppm	0	0	0	0



ADDITIFS

Calcium	ppm	152	169	172	211
Magnésium	ppm	3	4	4	5
Zinc	ppm	752	751	755	768
Phosphore	ppm	603	589	625	668
Baryum	ppm	0	<1	0	0
Bore	ppm	<1	<1	<1	<1

Diagnostic


Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

Depot: COMTOR
Unique No: 5737712
Signed: Kevin Marson
Report Date: 08 Mar 2024




GRAPHS


Alliages ferreux

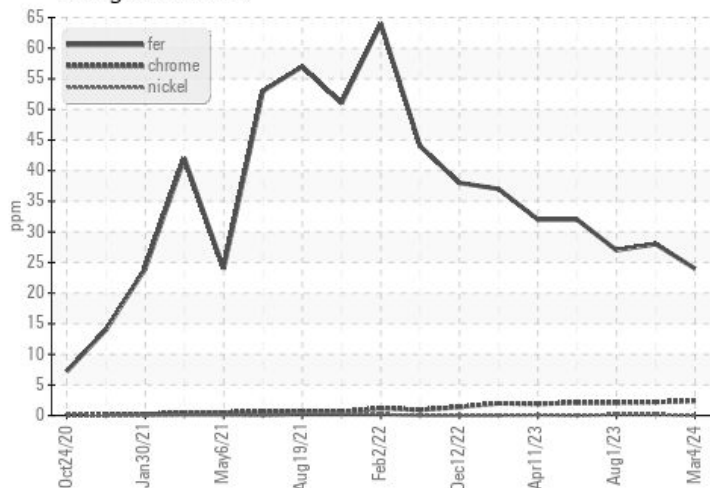

Métaux non-ferreux

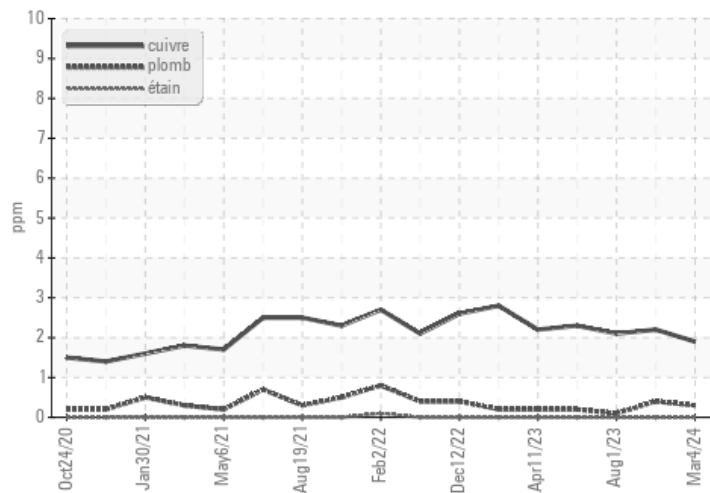

Viscosité 40°C

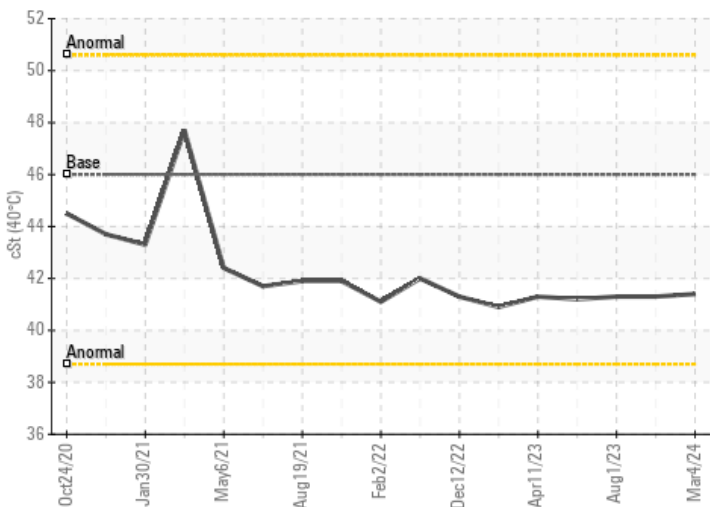

Comptage de particules

