

Machine Id
TRAYLOR 54-74 211-GC1

Component
Crusher
Fluid

PETRO CANADA ENDURATEX EP 320 (2200 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC385142	PC385143	PC385147
Sample Date	Client Info	05 Jul 2019	16 Jun 2019	01 May 2019
Machine Age	hrs	Client Info	6841	6511
Oil Age	hrs	Client Info	330	263
Oil Changed	Client Info	Not Changed	Not Changd	Not Changed
Sample Status		NORMAL	ATTENTION	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >200	2	2	2
Chromium	ppm ASTM D5185(m) >15	0	0	0
Nickel	ppm ASTM D5185(m) >15	0	0	<1
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	0	0	0
Aluminum	ppm ASTM D5185(m) >50	0	<1	0
Lead	ppm ASTM D5185(m) >100	1	1	<1
Copper	ppm ASTM D5185(m) >200	4	4	3
Tin	ppm ASTM D5185(m) >15	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 55	60	66	67
Barium	ppm ASTM D5185(m) 0	0	0	0
Molybdenum	ppm ASTM D5185(m) 0	0	0	0
Manganese	ppm ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm ASTM D5185(m) 0	<1	<1	<1
Calcium	ppm ASTM D5185(m) 0	<1	1	<1
Phosphorus	ppm ASTM D5185(m) 240	243	267	259
Zinc	ppm ASTM D5185(m) 1	2	2	2
Sulfur	ppm ASTM D5185(m) 13700	6266	6727	6963
Lithium	ppm ASTM D5185(m)	0	0	0






CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >100	2	4	4
Sodium	ppm ASTM D5185(m)	0	0	0
Potassium	ppm ASTM D5185(m) >20	0	<1	0

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	15214	28950	14128
Particles >6µm	ASTM D7647 >5000	845	1552	514
Particles >14µm	ASTM D7647 >640	63	27	28
Particles >21µm	ASTM D7647 >160	18	4	5
Particles >38µm	ASTM D7647 >40	1	0	0
Particles >71µm	ASTM D7647 >10	0	0	0
Oil Cleanliness	ISO 4406 (c) >21/19/16	21/17/13	22/18/12	21/16/12

OIL ANALYSIS REPORT

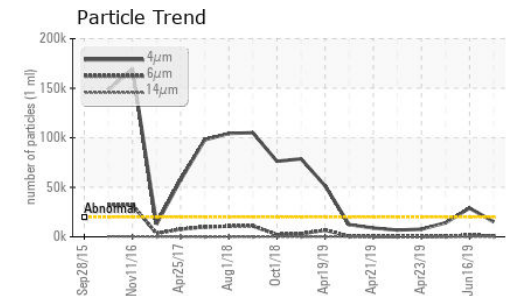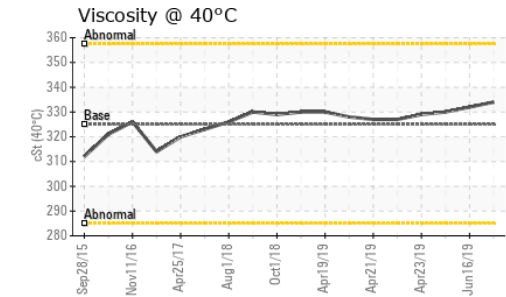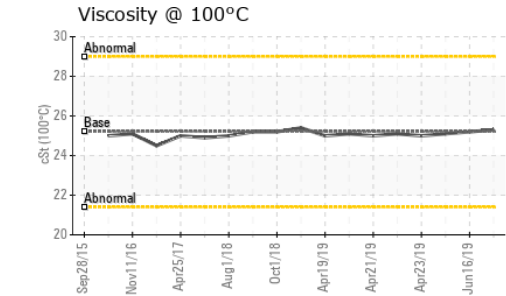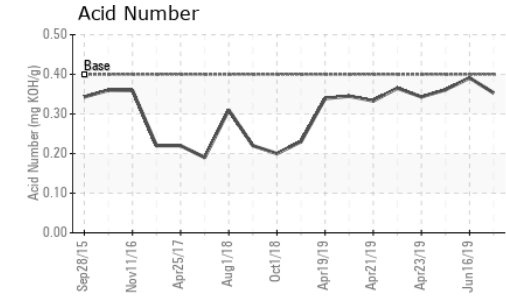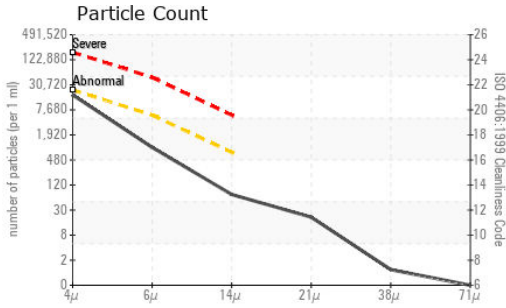

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.4	0.353	0.391	0.361

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	325	334	332	330
Visc @ 100°C	cSt	ASTM D7279(m)	25.22	25.3	25.2	25.1
Viscosity Index (VI)	Scale	ASTM D2270*	100	98	98	98

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC385142
Lab Number : **02296773**
Unique Number : 4900046
Test Package : IND 2 (Additional Tests: KV100, VI)

CRH Canada – Ogden Point Quarry
 PO Box 160, 176 Victoria Beach Road
 Colborne, ON
 CA K0K 1S0
 Contact: Sefton Grell
 sefton.grell@ca.crh.com
 T: (905)355-2534
 F: (905)355-2667

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.