




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

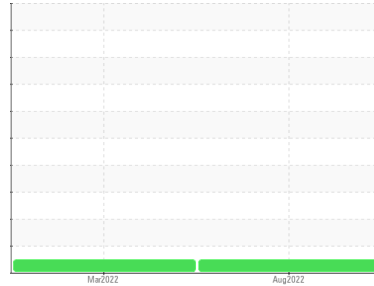

Machine Id
801106
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0057786	GFL0044505	---
Sample Date	Client Info		26 Aug 2022	07 Mar 2022	---
Machine Age	hrs	Client Info	9364	8248	---
Oil Age	hrs	Client Info	537	0	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>50	0	---	---
Iron	ppm	ASTM D5185(m)	>160	135	140
Chromium	ppm	ASTM D5185(m)	>5	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0
Silver	ppm	ASTM D5185(m)	>5	0	0
Aluminum	ppm	ASTM D5185(m)	>50	19	17
Lead	ppm	ASTM D5185(m)	>50	20	19
Copper	ppm	ASTM D5185(m)	>225	18	17
Tin	ppm	ASTM D5185(m)	>10	2	2
Antimony	ppm	ASTM D5185(m)		0	0
Vanadium	ppm	ASTM D5185(m)		0	0
Beryllium	ppm	ASTM D5185(m)		0	0
Cadmium	ppm	ASTM D5185(m)		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	78	129	157
Barium	ppm	ASTM D5185(m)		0	0
Molybdenum	ppm	ASTM D5185(m)	0	<1	<1
Manganese	ppm	ASTM D5185(m)		2	2
Magnesium	ppm	ASTM D5185(m)	0	3	3
Calcium	ppm	ASTM D5185(m)	113	128	132
Phosphorus	ppm	ASTM D5185(m)	222	333	399
Zinc	ppm	ASTM D5185(m)		11	11
Sulfur	ppm	ASTM D5185(m)	1326	1970	2185
Lithium	ppm	ASTM D5185(m)		<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	6	6
Sodium	ppm	ASTM D5185(m)		13	12
Potassium	ppm	ASTM D5185(m)	>20	2	2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.4	1.96	2.12



OIL ANALYSIS REPORT

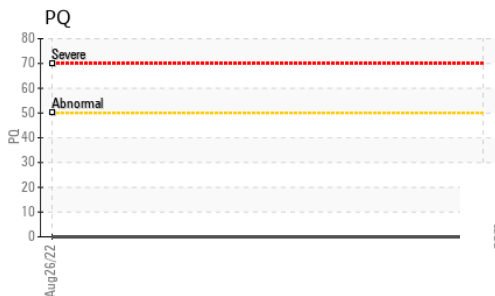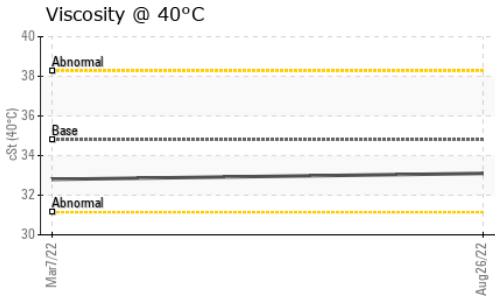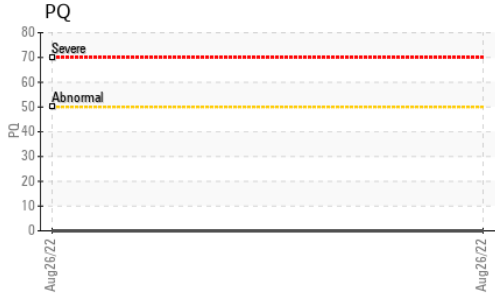

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	34.8	33.1	32.8









SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				
Bottom				

no image

no image

GRAPHS

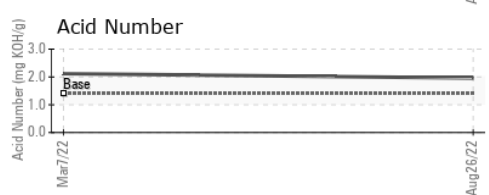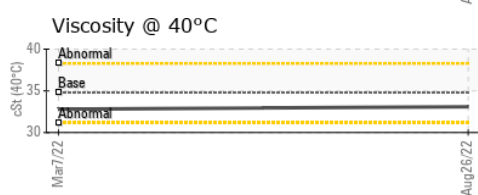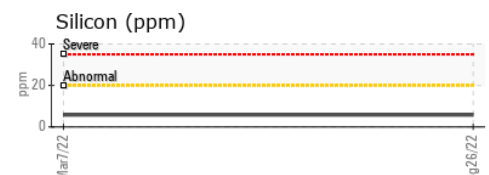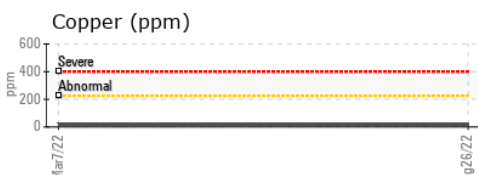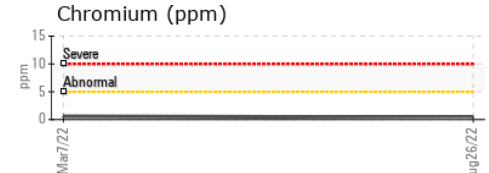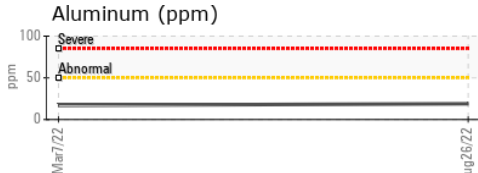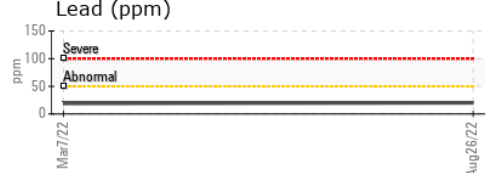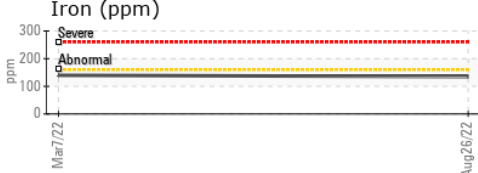

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 550 - Rocky View County
Sample No. : GFL0057786 **Received** : 06 Sep 2022
Lab Number : 02509091 **Diagnosed** : 07 Sep 2022
Unique Number : 5450061 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

220 Carmek Blvd
 Rocky View County, AB
 CA T1X 1X1
 Contact: GFL Calgary
 calgarymaintenance@gflenv.com
 T:
 F: (403)369-6163